

1 ARCHITECTURAL SITE PLAN  
1/32" = 1'-0"

**GENERAL NOTES**

- A. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- B. BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- C. DO NOT SCALE DRAWINGS.
- D. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- E. COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LANDSCAPING OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- F. GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- G. WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- H. WHEN WORK, NOT SPECIFICALLY CALLED OUT, IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- I. GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.

**PLAN KEYNOTES**

- 1. EXTERIOR BUILDING WORK TYPICAL OF ALL SIDES OF BUILDING:
  - PRESSURE WASH ALL EXTERIOR SURFACES.
  - REMOVE OLD SEALANT AND BACKER RODS, INCLUDING ALL WINDOWS AND DOORS. DO NOT CAULK OVER EXISTING WEEP HOLES. INSTALL NEW BACKER ROD AND SEALANT IN PLACE TO MATCH EXISTING COLOR.
  - ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPED AND REPAINTED TO MATCH EXISTING PAINT COLOR. VERIFY COLOR IN FIELD. INCLUDES, BUT NOT LIMITED TO, PREVIOUSLY PAINTED BOLLARDS, GUARD RAILS, METAL DOORS, AND FRAMES, ETC. DOES NOT INCLUDE BUILDING METAL PANEL FACADE.
- 2. UPDATE ALL EXISTING NON-LED LIGHT FIXTURES TO LED FIXTURES. ELECTRICAL TO RE-ESTABLISH POWER TO ANY DISCONNECTED LIGHTING FIXTURES. COORDINATE WITH ELECTRICAL DRAWINGS.
- 3. PAINT ALL BLUE CORNINGTRIM BACK TO BLUE TO MATCH EXISTING.
- 4. PRESSURE WASH SIDEWALKS, REPLACE ALL BACKER RODS AND SEALANT.

**GPD Group**  
Professional Corporation  
520 South Main Street, Suite 2051  
Tumwater, WA 98501  
509.572.2106 Fax 509.572.2103

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RELIANCE,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

DESIGNER	CK
PROJECT MANAGER	DL
DRAWING NO.	2022359.19

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501

**UNITED STATES POSTAL SERVICE**


Facilities, 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861

**A-100 ARCHITECTURAL SITE PLAN**

Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

Date: 09/06/2023  
Revisions: 100% OWNER REVIEW

© Copyright 2006-2009, United States Postal Service

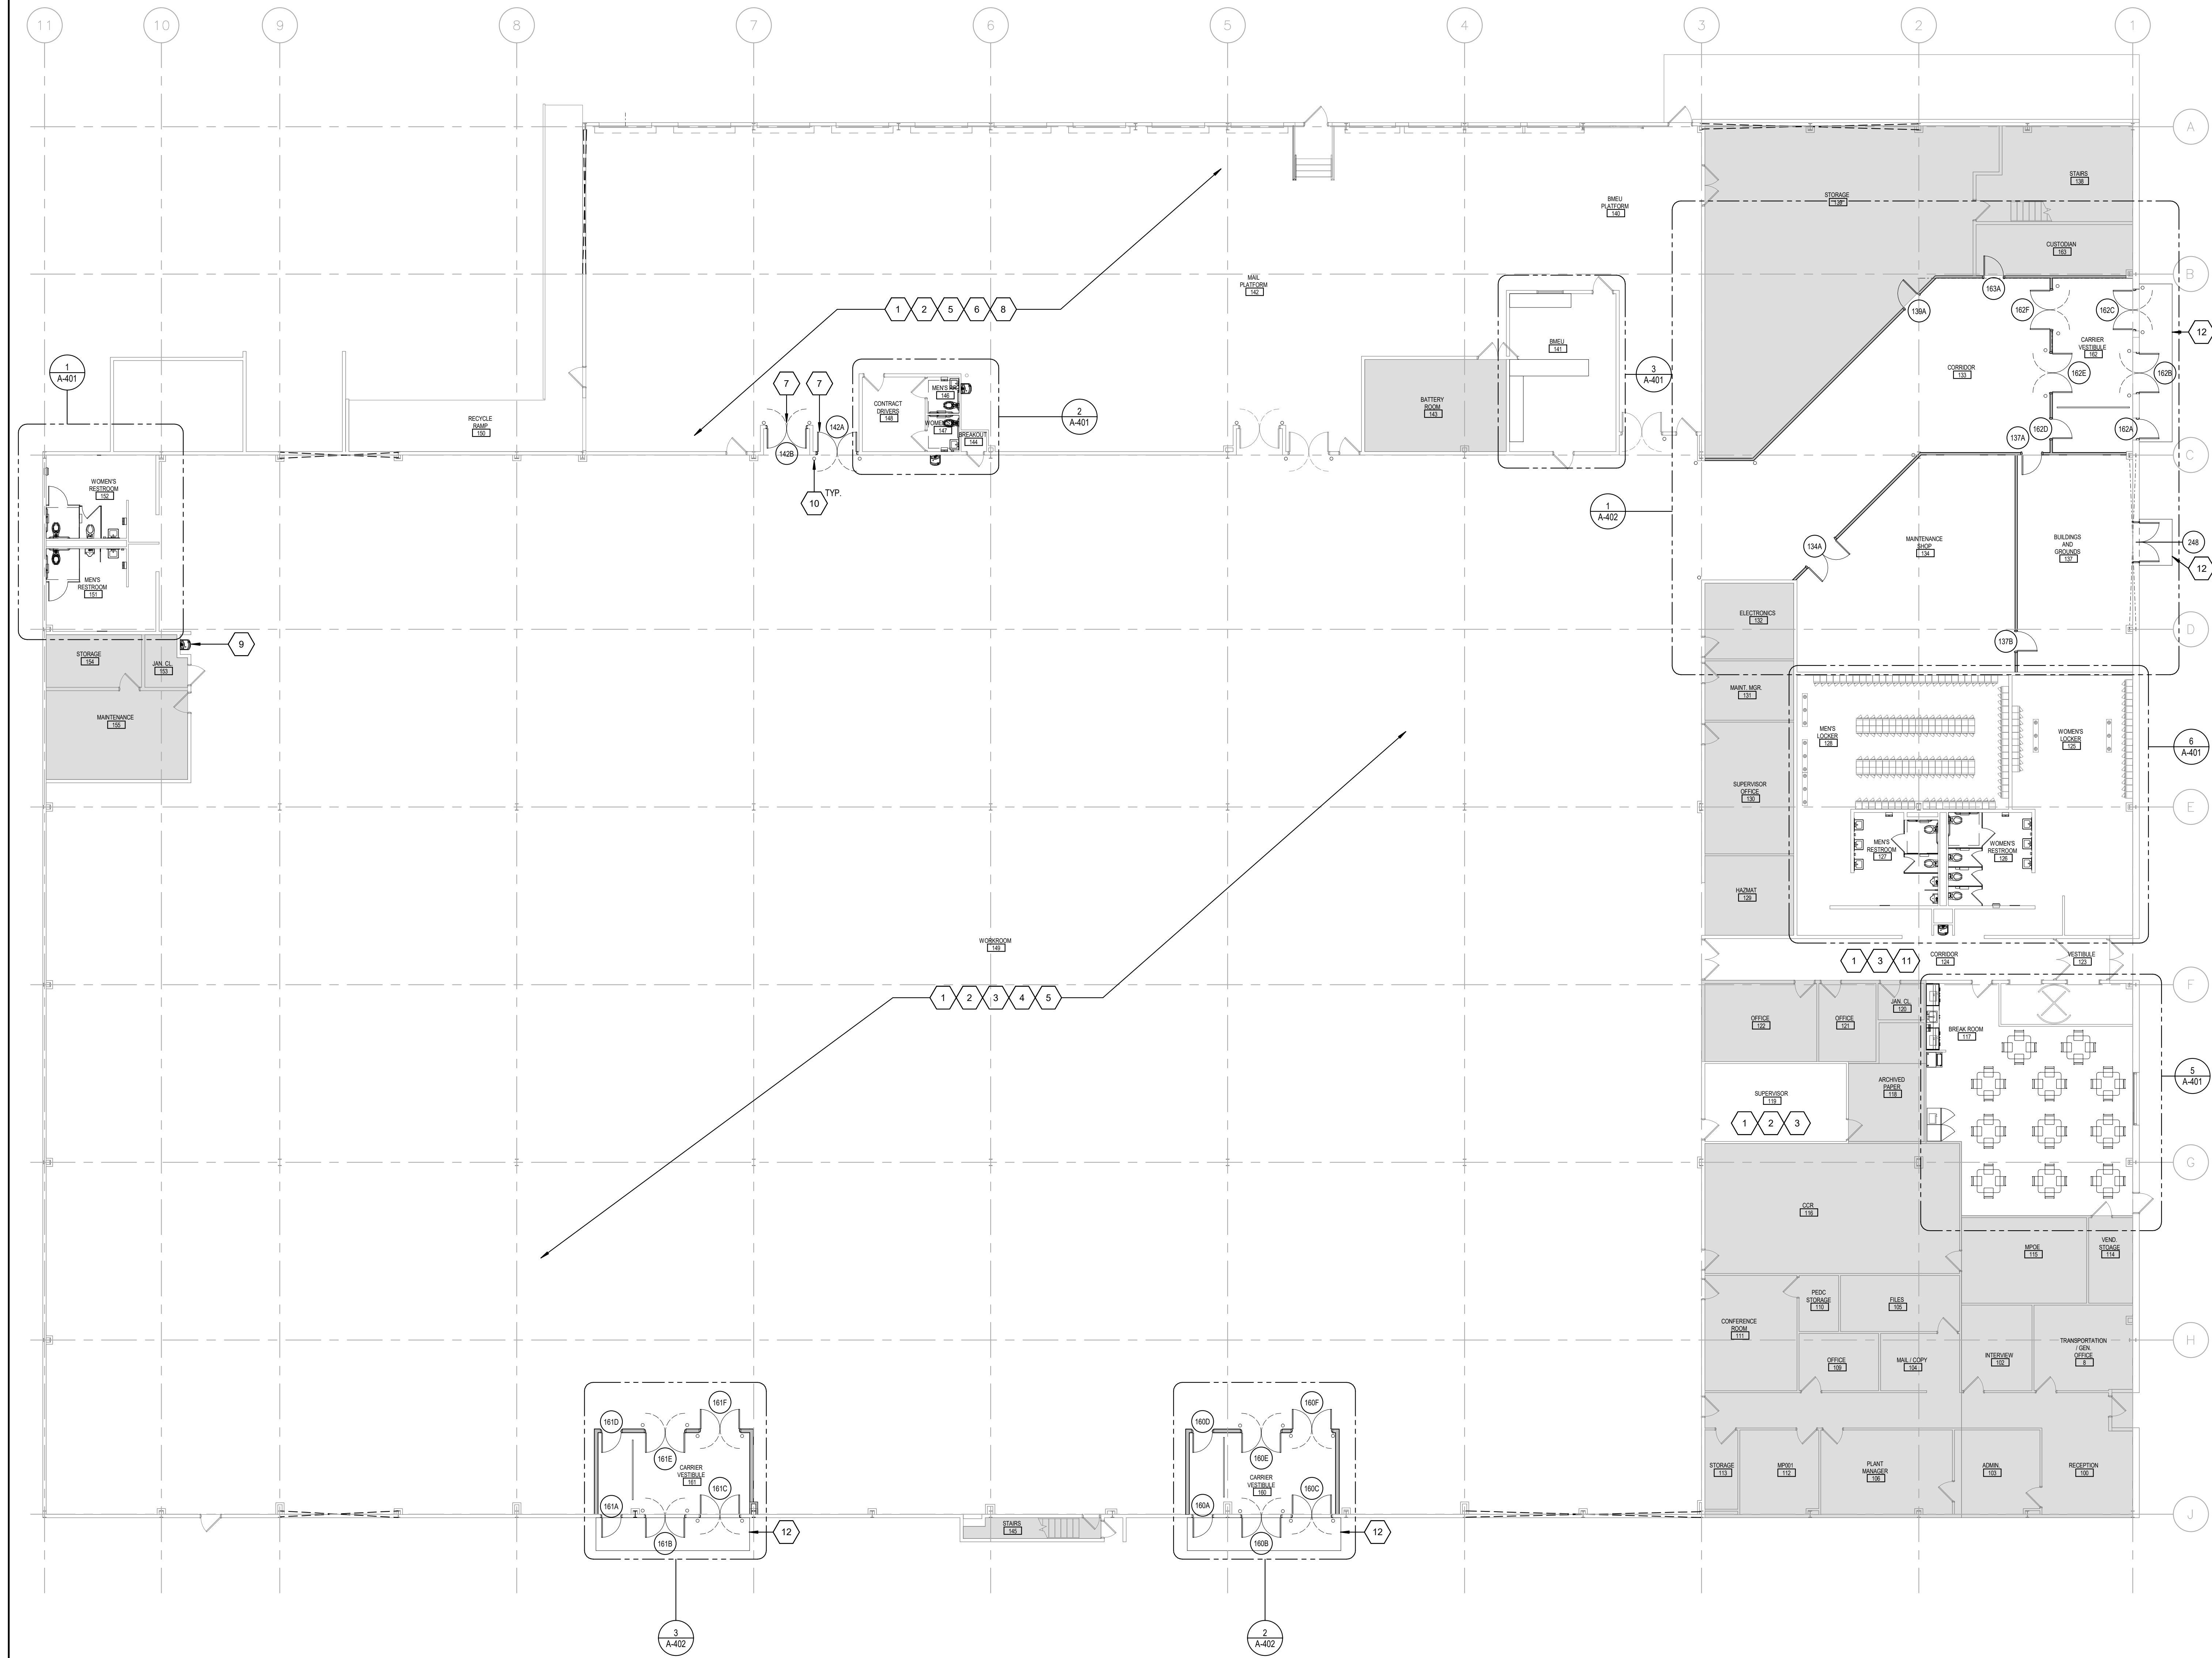

**1 FLOOR PLAN**  
3/32" = 1'-0"

**GENERAL NOTES**

- A. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- B. BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- C. DO NOT SCALE DRAWINGS.
- D. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- E. COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LAND/OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- F. GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- G. WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- H. WHEN WORK, NOT SPECIFICALLY CALLED OUT, IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- I. GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.
- J. COORDINATE ALL NEW FLOOR, BASE, WALL AND CEILING FINISHES WITH FINISH PLAN & NOTES.
- K. PROVIDE 2 X DYCORN (OR APPROVED EQUAL) FIRE RETARDANT TREATED WOOD BLOCKING BEHIND GYP. BD. AT ALL FIXTURES, MILLWORK AND EQUIPMENT THAT REQUIRES WOOD BLOCKING FOR INSTALLATION. REPLACE ALL WATER DAMAGED OR DAMAGED BLOCKING UNCOVERED DURING DEMOLITION AS REQUIRED.

**PHASING NOTE:**

- 1. CONTRACTOR SHALL ONLY RENOVATE A SINGLE RESTROOM AT A TIME, ONE MEN'S AND ONE WOMEN'S. ALL OTHER RESTROOM LOCATIONS AT THE SITE SHALL REMAIN IN SERVICE UNTIL RENOVATIONS OF THE RESTROOM OUT OF SERVICE ARE COMPLETE.
- 2. GC TO PROVIDE MOBILE PORTABLE RESTROOM TRAILER FOR THE EXTENT OF THE PROJECT. GO TO COORDINATE WITH USPS FOR EXACT LOCATION. ENSURE QUANTITIES OF FUTURE MEETS ALL REQUIREMENTS STATED ON G-901 LIFE SAFETY SHEET.

**PLAN KEYNOTES**


- 1. ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPPED AND REPAINTED TO MATCH EXISTING PAINT COLOR. VERIFY COLOR IN FIELD. INCLUDING, BUT NOT LIMITED TO PREVIOUSLY PAINTED BOLLARDS, GUARD RAILS, METAL DOORS, AND FRAMES ETC. PROVIDE NEW WALL FINISH. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
- 2. PROVIDE NEW LED LIGHTING. ALL EMERGENCY EGRESS LIGHTING TO BE UPDATED. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL DRAWINGS.
- 3. PROVIDE NEW FLOOR AND WALL BASE FINISH PER FINISH FLOOR PLAN AND FINISH SCHEDULE. INSTALL TRANSITION STRIPS AS REQUIRED. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
- 4. CLEAN AND RECOAT EXISTING BLACKJACK FLOOR. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
- 5. CLEAN EXCESS DUST AND DIRT FROM ALL ROOF STRUCTURE, PIPING, AND DUCTWORK ABOVE.
- 6. REPAIR, CLEAN AND RESEAL EXISTING CONCRETE FLOOR. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- 7. PROVIDE NEW IMPACT DOOR IN EXISTING FRAME, AND ALL ASSOCIATED HARDWARE. SEE DOOR SCHEDULE FOR MORE INFORMATION.
- 8. REPLACE DAMAGED WOODEN BUMPERS AND REFINISH ALL TO MATCH ADJACENT.
- 9. PROVIDE NEW DRINKING FOUNTAIN / BOTTLE FILLER. INSTALL PER ADA HEIGHT. SEE G-002 FOR MORE INFORMATION.
- 10. PROVIDE (2) SURFACE MOUNTED 4" ROUND STEEL BOLLARDS WITH SAFETY YELLOW HDPL BOLLARD COVERS AT ALL COVERED PARKING EXHAUST AIR DROP DOWNS. LOCATE IN FIELD. COORDINATE WITH MECHANICAL FOR EXHAUST AIR DUCTWORK LOCATIONS.
- 11. G.C. TO PROVIDE NEW ACOUSTIC CEILING TILE AND GRID. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- 12. PROVIDE NEW FROST SLAB AT EXTERIOR ENTRIES. SEE STRUCTURAL FOR DETAILS.

**GPD Group**  
Professional Corporation  
150 South Main Street, Suite 2031  
Tacoma, WA 98501  
360.572.2100 Fax 360.572.2101

**PRELIMINARY DRAFT**  
NOT FOR CONSTRUCTION,  
BID, RECORDATION,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

PROJECT MANAGER: **LD**  
DESIGNER: **CK**  
DL: **DL**  
JOB NO: **2022359.19**

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501



**A-101 FLOOR PLAN**

Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

Date: 09/06/2023  
Revisions: 100% OWNER REVIEW

Facilities: 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861



### GENERAL NOTES

- IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- DO NOT SCALE DRAWINGS.
- IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LAND/GRID/OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- WHEN WORK NOT SPECIFICALLY CALLED OUT IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.
- COORDINATE ALL NEW FLOOR, BASE, WALL AND CEILING FINISHES WITH FINISH PLAN & NOTES.
- PROVIDE 2x 4 DRICON (OR APPROVED EQUAL) FIRE RETARDANT TREATED WOOD BLOCKING BEHIND GYP. BD. AT ALL FIXTURES, MILLWORK AND EQUIPMENT THAT REQUIRES WOOD BLOCKING FOR INSTALLATION. REPLACE ALL WATER DAMAGED OR DAMAGED BLOCKING UNCOVERED DURING DEMOLITION AS REQUIRED.

### PLAN KEYNOTES

- TILE FINISH TO BE ON WET WALLS OR PREVIOUSLY TILED WALLS ONLY. ALL REMAINING WALLS TO BE PAINTED. SEE 2 / A-102 FOR ADDITIONAL INFORMATION REGARDING TILE WALL FINISH.
- ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPED AND REPAINTED TO MATCH EXISTING PAINT COLOR. VERIFY COLOR IN FIELD. INCLUDED BUT NOT LIMITED TO PREVIOUSLY PAINTED BOLLARDS, GUARD RAILS, METAL DOORS AND FRAMES ETC. PROVIDE NEW WALL FINISH.
- PROVIDE NEW FLOOR AND WALL BASE FINISH PER FINISH PLAN AND FINISH SCHEDULE. INSTALL TRANSITION STRIPS AS REQUIRED. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- CLEAN EXISTING BLACKJACK FLOOR. PATCH AND RECOAT EXISTING BLACKJACK FLOOR.
- (NOT USED)
- EXISTING GYP. BD. CEILING TO REMAIN AND BE REPAINTED. PROVIDE NEW LED LIGHTING. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL. SEE FINISH SCHEDULE FOR MORE INFORMATION REGARDING NEW CEILING FINISH.
- CLEAN CONCRETE FLOOR. PATCH AND RESEAL.
- EXISTING CEILING GRID TO REMAIN. G.C. TO PROVIDE NEW ACOUSTIC CEILING TILE. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL.
- PROVIDE NEW ACOUSTIC CEILING AND GRID, INCORPORATING NEW LIGHTING. PROVIDE HOLD-DOWN CLIPS. CEILINGS TO BE 10'4" A.F.F. COORDINATE WITH ELECTRICAL, MECHANICAL AND FIRE SUPPRESSION ENGINEERS FOR EXTENTS OF WORK.

### FINISH FLOOR PLAN LEGEND

NOTE: SEE FINISH SCHEDULE FOR ADDITIONAL INFORMATION REGARDING ROOM FINISHES.


ROOM	ROOM NAME
100	ROOM NUMBER
C	CEILING FINISH
W	WALL FINISH
B	BASE FINISH
F	FLOOR FINISH

NO WORK IN THIS AREA


### ROOM FINISH NOTES:

- VERIFY ALL COLORS, LOCATIONS, AND MATERIALS W/ USPS PRIOR TO ORDERING MATERIALS
- ALL SURFACE MOUNTED ITEMS TO BE REMOVED PRIOR TO APPLYING WALL FINISH. PREPARE SURFACE AS NECESSARY MAKING REPAIRS TO DRYWALL OR CMU.
- FLOORING TO BE REPAIRED AS NECESSARY AND CLEANED/WAXED WHERE NO NEW FLOOR FINISH IS REQUIRED
- REMOVE EXISTING FLOORING, WALL BASE, AND ALL ADHESIVES BACK TO SUB SURFACE WHERE NEW FLOOR FINISH IS REQUIRED. CLEAN AND PREP FOR APPLICATION OF NEW FINISH
- G.C. SHALL REVIEW FINISHES AS LISTED ABOVE. IF LISTED FINISHES ARE NOT READILY AVAILABLE GC SHALL SELECT AN APPROVED ALTERNATE FINISH MANUFACTURER AND MODEL NUMBER AS LISTED FROM USPS SPECIFICATIONS.
- ENSURE ANY FLOOR DRAIN OR CLEANOUT COVERS ARE ADJUSTED TO BE FLUSH WITH ADJACENT FINISHED FLOORING.
- INSTALL NEW TRANSITION STRIPS BETWEEN ANY EXISTING FLOOR FINISHES AND NEW DISSIMILAR FLOOR FINISHES.
- COLUMN PAINT
  - IF THE COLUMN IS A STRAIGHT RUN COLUMN THEN IT SHOULD BE PAINTED P-1, FLOOR TO CEILING OR ROOF DECK.
  - IF THE COLUMN IS A STRAIGHT RUN COLUMN AND HAS A FIRE EXTINGUISHER ON IT THEN IT SHOULD BE PAINTED RED.
  - IF THERE IS A CONCRETE BASE OR BARRIER THAT IS A CHANGE IN SIZE IT SHOULD BE PAINTED SAFETY YELLOW AT THE BASE AND THEN P-1 ABOVE OR RED FOR A FIRE EXTINGUISHER.


**1 FINISH FLOOR PLAN**  
3/32" = 1'-0"

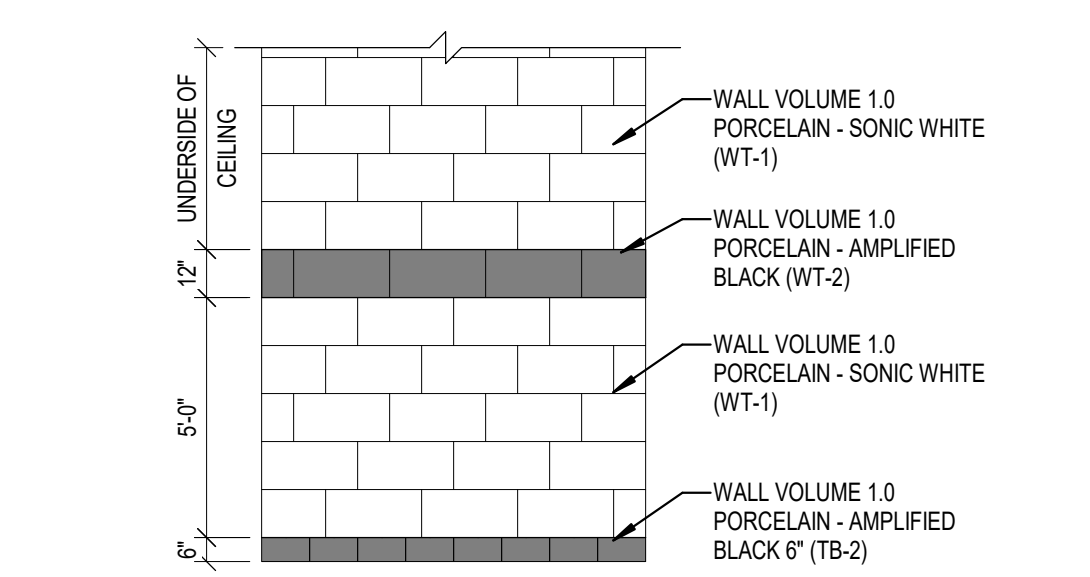

**2 TILE WALL ELEVATION**  
1/4" = 1'-0"

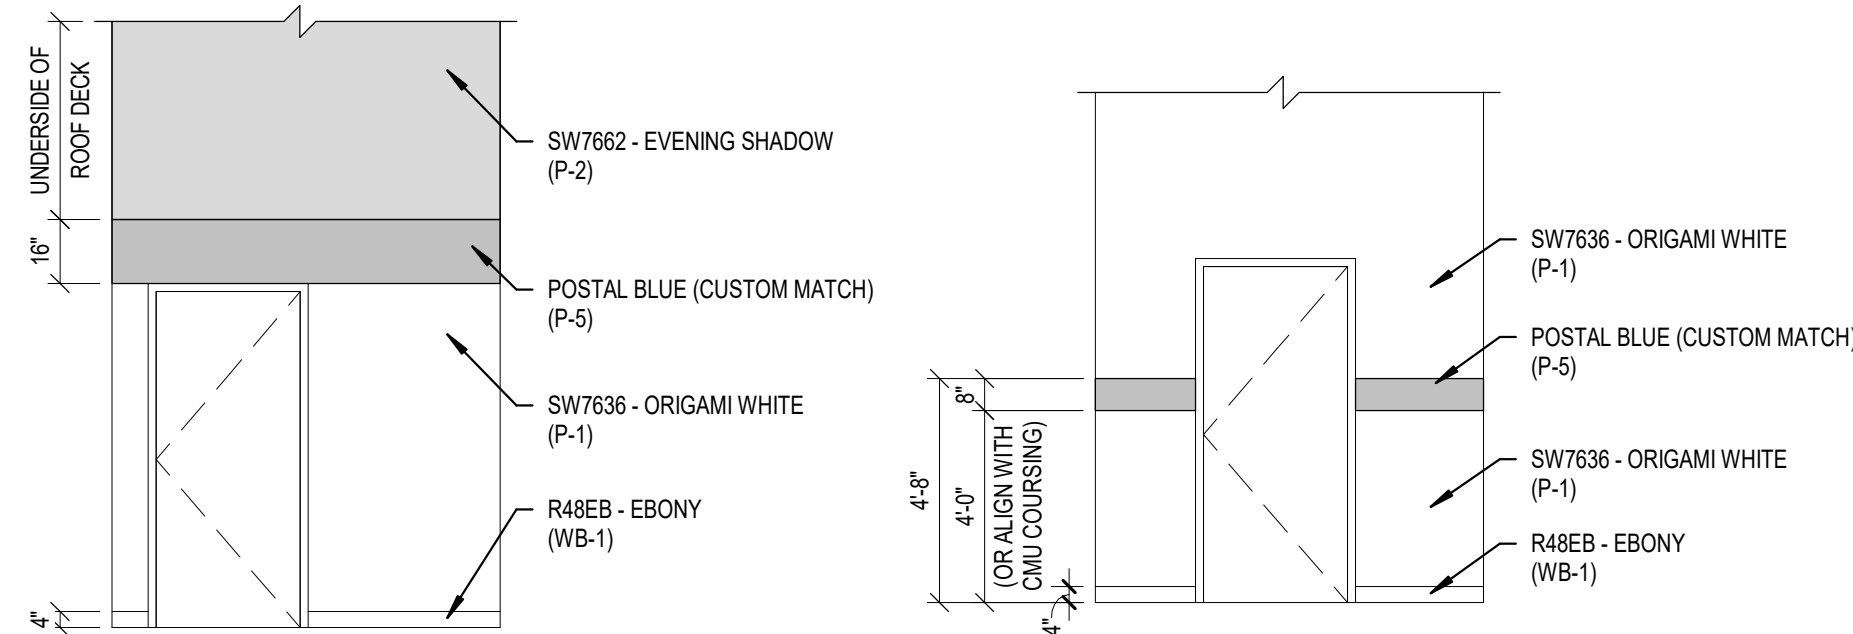

**3 WORK ROOM ELEVATION**  
1/4" = 1'-0"

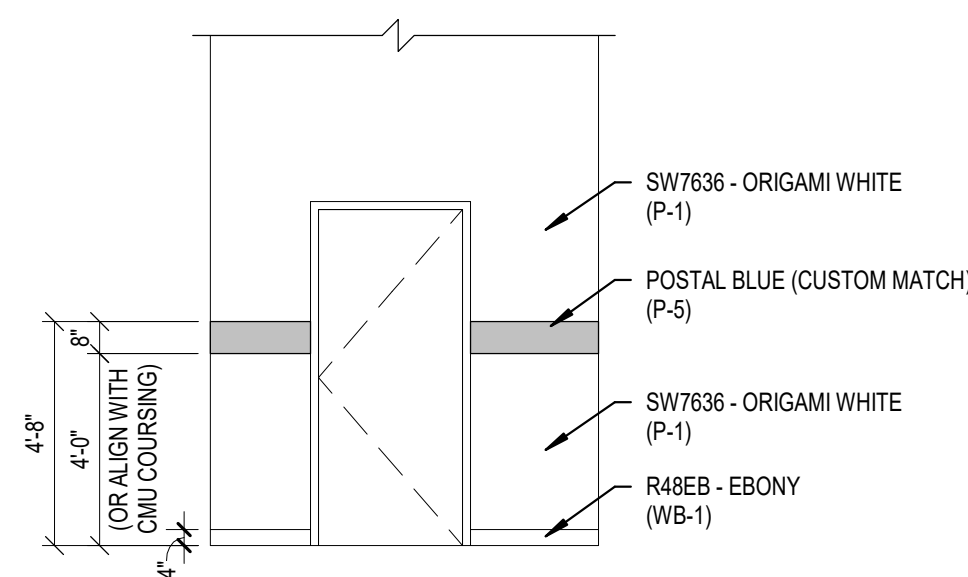

**4 BREAK ROOM ELEVATION**  
1/4" = 1'-0"

ITEM #	DESCRIPTION	MANUFACTURER	MODEL	COLOR	REMARKS
<b>CEILING FINISH</b>					
P-1	PAINT	SHERWIN WILLIAMS	SW7836	ORIGAMI WHITE	--
ACT-1	ACOUSTICAL CEILING TILE	ARMSTRONG USG CERTAINTED	--	WHITE	24MR83/4 FINE FISSED ANGLED TEGULAR 15/16" (VINYL FACED PANEL WHERE REQUIRED)
<b>WALL FINISH</b>					
P-1	PAINT	SHERWIN WILLIAMS	SW7836	ORIGAMI WHITE	SEE DETAIL 3 / A-102 ; SEE DETAIL 4 / A-102
P-2	PAINT	SHERWIN WILLIAMS	SW7862	EVENING SHADOW	SEE DETAIL 3 / A-102
P-3	NOT USED	--	--	--	--
P-4	PAINT	CUSTOM MATCH	(MATCH PMS 485C)	POSTAL BLUE	--
P-5	PAINT	CUSTOM MATCH	(MATCH PMS 301C)	POSTAL BLUE	SEE DETAIL 3 / A-102 ; SEE DETAIL 4 / A-102
WT-1	WALL TILE	DAL TILE	1224 1.0 PORCELAIN	SONIC WHITE	SEE DETAIL 2 / A-102
WT-2	WALL TILE	DAL TILE	1224 1.0 PORCELAIN	AMPLIFIED BLACK	SEE DETAIL 2 / A-102
WT-3	WALL TILE	DAL TILE	COLOR WHEEL SECTIONS	WHITE	3X6 WHITE SUBWAY TILE - RUNNING BOND LAYOUT BACKSPLASH
<b>BASE FINISH</b>					
WB-1	COVE BASE	ARMSTRONG	R48EB	EBONY	WALL BASE 4"
TB-2	WALL TILE	DAL TILE	1224 1.0 PORCELAIN	AMPLIFIED BLACK	WALL BASE 6"
<b>FLOOR FINISH</b>					
RFT-1	RESILIENT VINYL FLOORING	ARMSTRONG	EXCELON IMPERIAL TEXTURE - 51915	CHARCOAL	12X12X18
RFT-2	RESILIENT VINYL FLOORING	ARMSTRONG	EXCELON IMPERIAL TEXTURE - 51904	STERLING	12X12X18
RFT-3	RESILIENT VINYL FLOORING	ARMSTRONG	EXCELON IMPERIAL TEXTURE - 51903	BLUE GRAY	12X12X18
FT-1	FLOOR TILE	DAL TILE	1224 1.0 PORCELAIN	AMPLIFIED BLACK	1224 1.0 PORCELAIN - RUNNING BOND LAYOUT
BJ-1	ROLL-ON FLOOR FINISH	SPEC. PROVIDED LATER	--	BLACK	PROVIDE 3 COATS AND SEALER
<b>GROUT FINISH</b>					
GS-1	GROUT	CUSTOM BUILDING PRODUCTS	PRISM-640	ARCTIC WHITE	FOR ALL WHITE WALL AND WHITE WALL BASE TILE
GS-2	GROUT	CUSTOM BUILDING PRODUCTS	PRISM-69	NATURAL GRAY	FOR ALL BLACK FLOOR AND BLACK WALL BASE TILE
<b>PLASTIC LAMINATE FINISH</b>					
PL-1	LAMINATE FINISH	WILSONART	YS02	STRAIGHT CUT OAK	FOR BASE CABINETS & UPPER CABINETS
AL-PL-1	LAMINATE FINISH	WILSONART	4651-60	NAVY LEGACY	FOR BASE CABINETS & UPPER CABINETS
PL-2	LAMINATE FINISH	WILSONART	5045	ICE MIST	FOR COUNTERTOPS & BACKSPLASH
PVC-1	COUNTERTOP EDGE BANDING 3 MM	WILSONART	D96-60	DOVE GREY	AT ALL EXPOSED EDGES OF COUNTERTOPS

**GPD Group**  
Professional Corporation  
520 South Main Street, Suite 2051  
Tacoma, WA 98402  
360.572.2106 Fax 360.572.2101

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RELOCATION,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

PROJECT MANAGER: [ ]  
DESIGNER: [ ]  
DATE: 09/05/2023  
JOB NO: 2022359.19


USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501

**UNITED STATES  
POSTAL SERVICE**


Facilities: 4301 wilson Blvd., suite 300, arlington, va 22203-1861

Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030


100% OWNER REVIEW  
Date: 09/05/2023  
**FINISH FLOOR PLAN**  
A-102

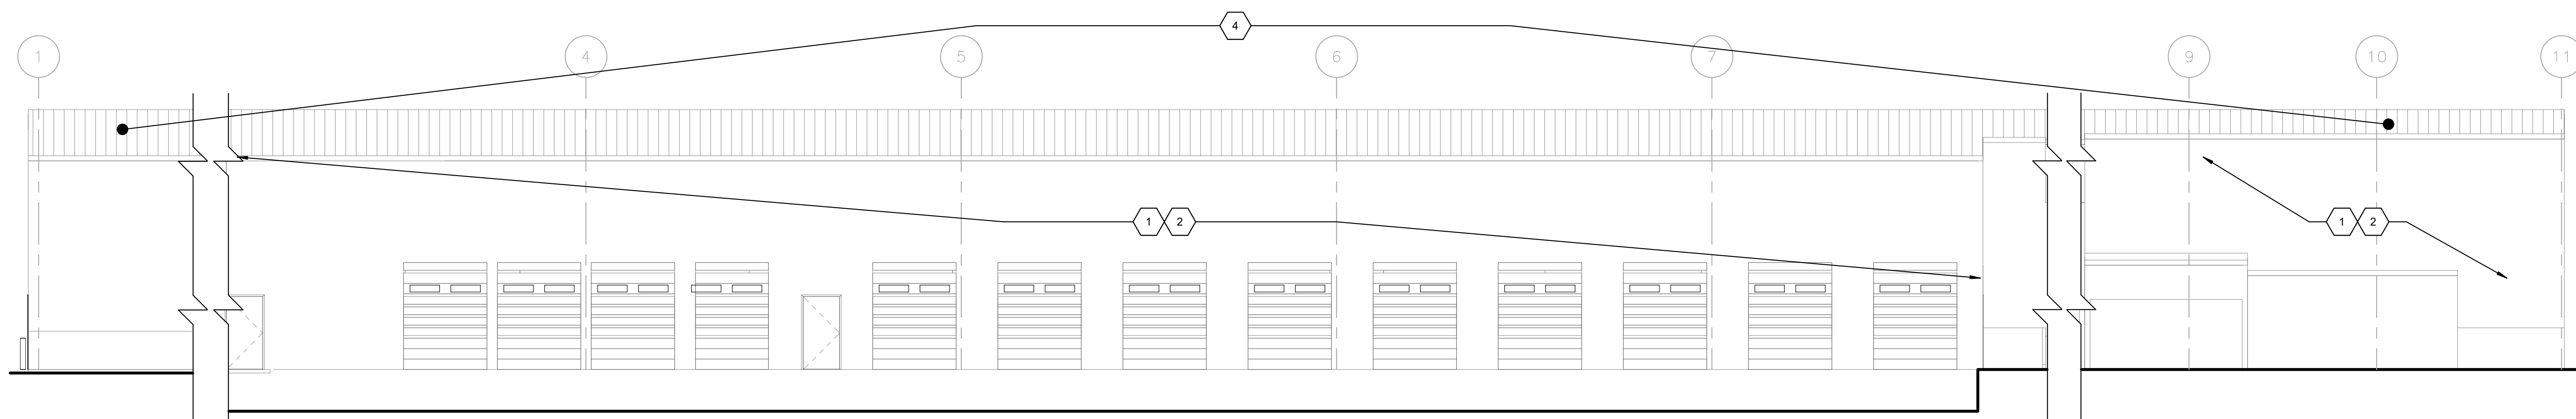


4 EAST ELEVATION  
1/8" = 1'-0"

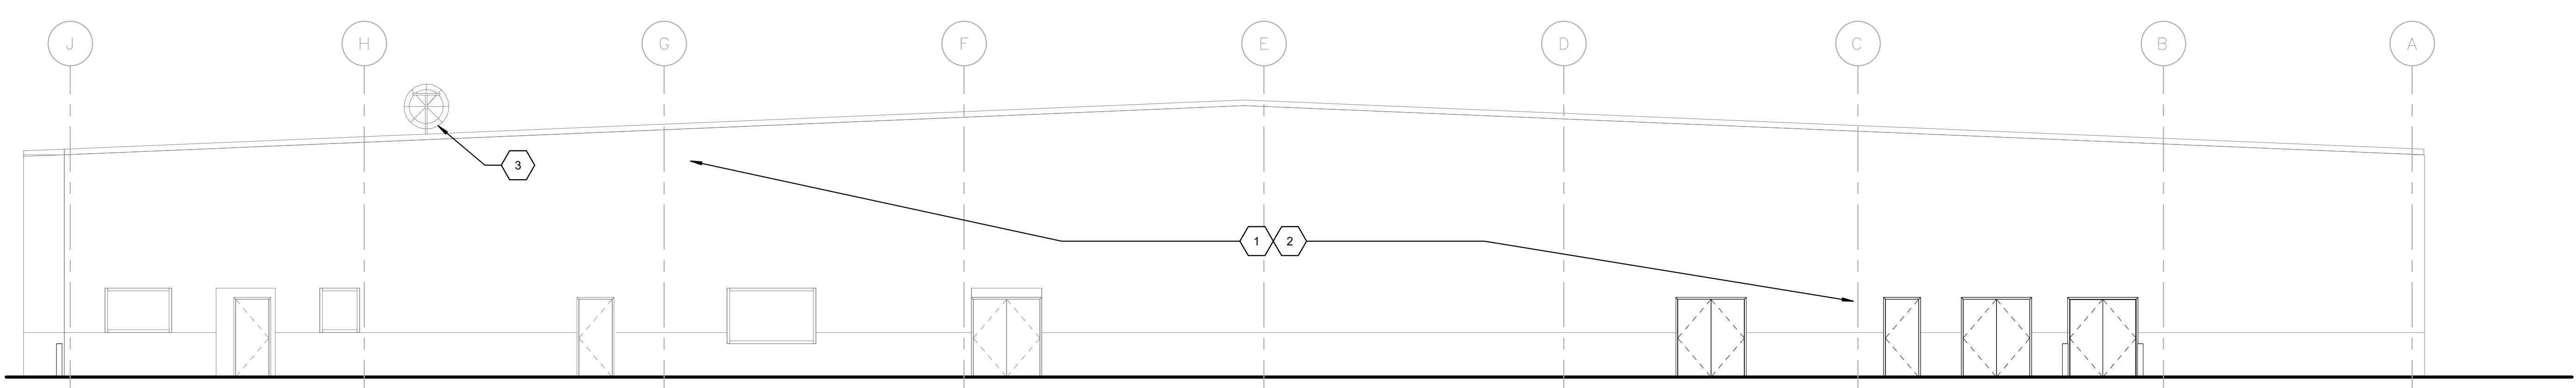

3 NORTH ELEVATION  
1/8" = 1'-0"

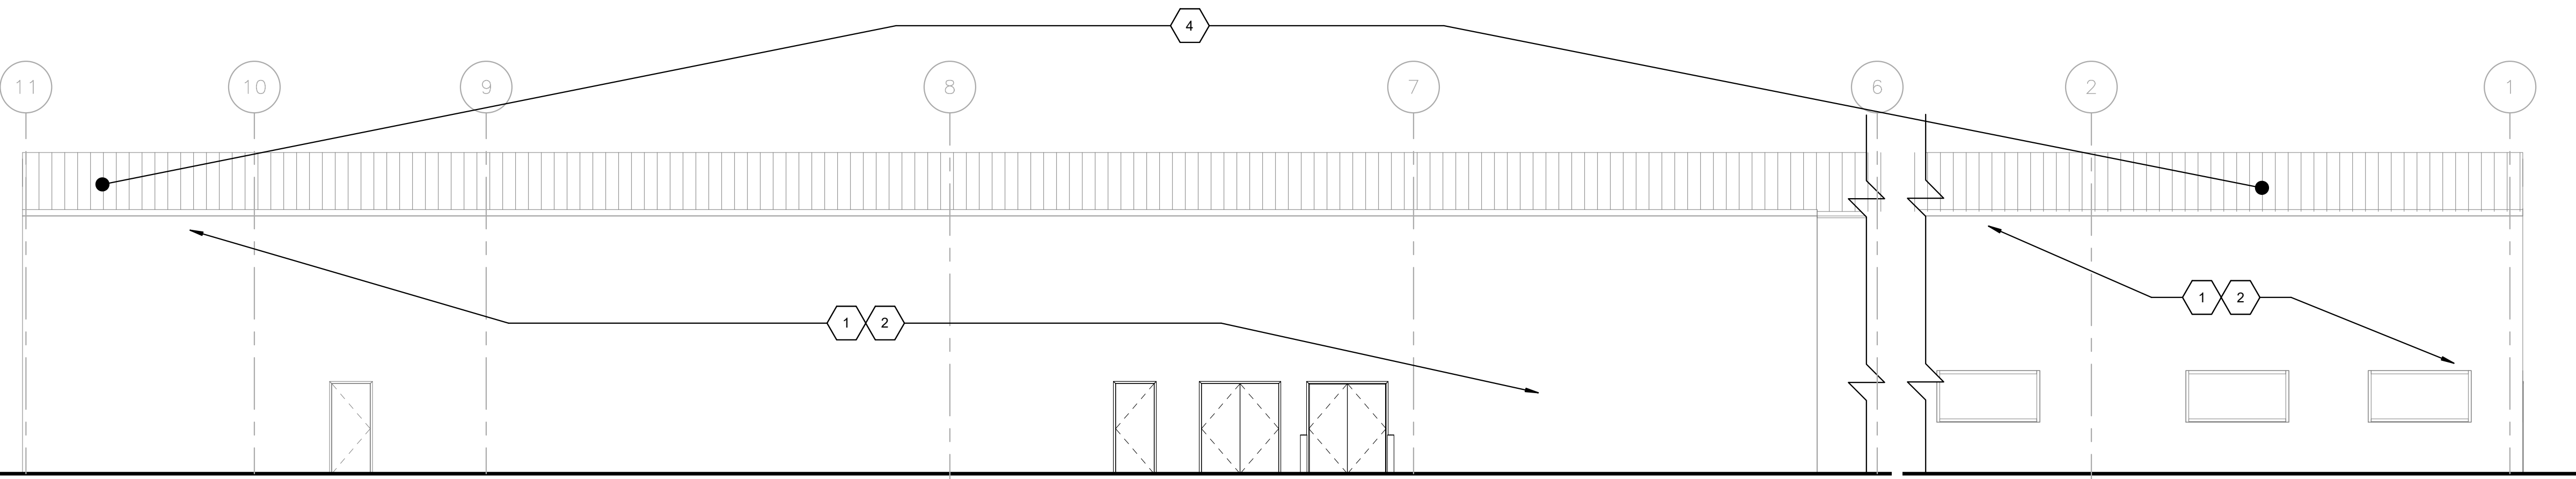

2 WEST ELEVATION  
1/8" = 1'-0"

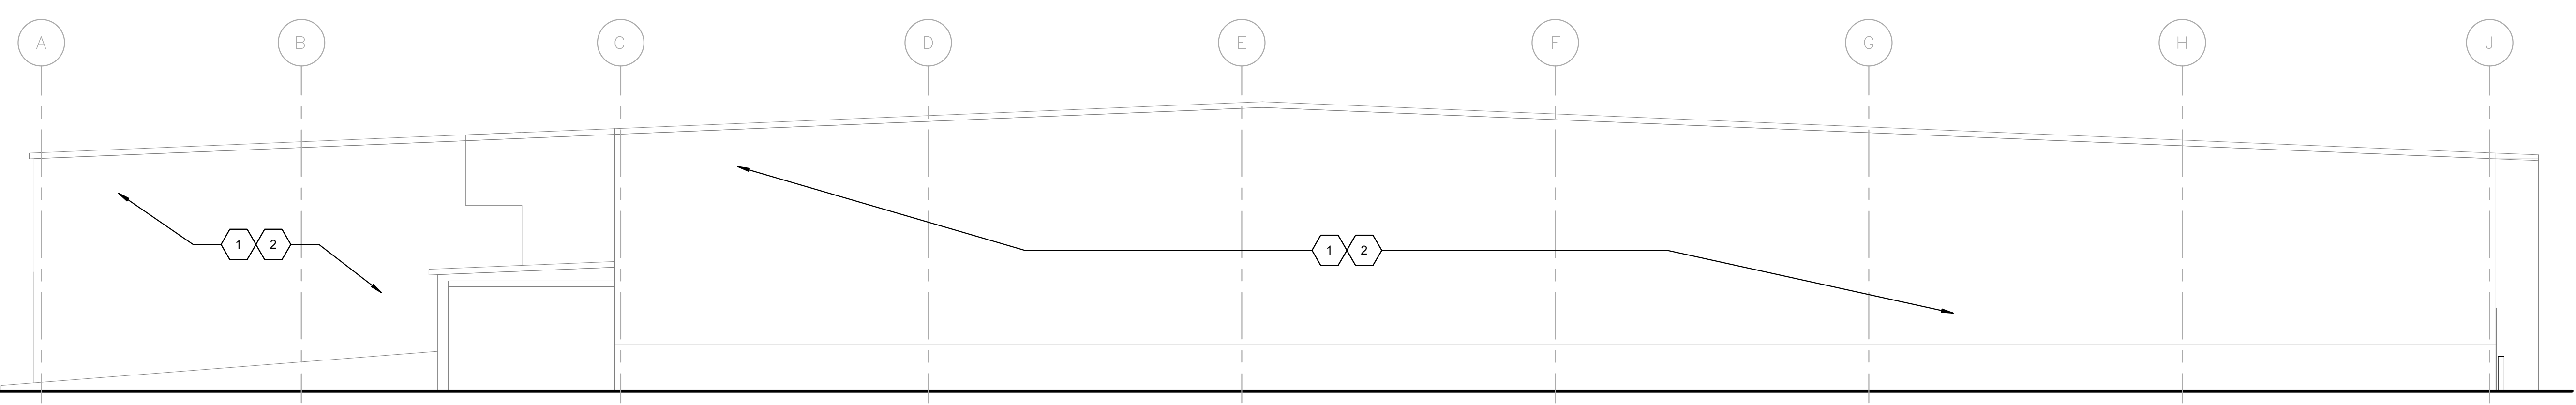

1 SOUTH ELEVATION  
1/8" = 1'-0"

GENERAL NOTES

- A. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- B. BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- C. DO NOT SCALE DRAWINGS.
- D. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION FOR IMMEDIATE CLARIFICATION.
- E. COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LANDLORD/BUILDING OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- F. GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- G. WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- H. WHEN WORK, NOT SPECIFICALLY CALLED OUT, IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- I. GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.

PLAN KEYNOTES

1. EXTERIOR BUILDING WORK TYPICAL OF ALL SIDES OF BUILDING:
  - PRESSURE WASH ALL EXTERIOR SURFACES.
  - REMOVE OLD SEALANT AND BACKER RODS, INCLUDING ALL WINDOWS AND DOORS. DO NOT CAULK OVER EXISTING WEEP HOLES. INSTALL NEW BACKER ROD AND SEALANT IN PLACE TO MATCH EXISTING COLOR.
  - ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPPED AND REPAINTED TO MATCH EXISTING PAINT COLOR. VERIFY COLOR IN FIELD. INCLUDES, BUT NOT LIMITED TO, PREVIOUSLY PAINTED BOLLARDS, GUARD RAILS, METAL DOORS, AND FRAMES, ETC. DOES NOT INCLUDE BUILDING METAL PANEL FACADE.
2. UPDATE ALL EXISTING NON-LED LIGHT FIXTURES TO LED FIXTURES. ELECTRICAL TO RE-ESTABLISH POWER TO ANY DISCONNECTED LIGHTING FIXTURES. COORDINATE WITH ELECTRICAL DRAWINGS.
3. REMOVE ALL EXISTING SATELLITE DISHES.
4. PAINT ALL BLUE COPING/TRIM BACK TO BLUE TO MATCH EXISTING.

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RELIANCE,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

DESIGNER	GC
PROJECT MANAGER	DL
DRAWING NO.	2022359.19

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501



EXTERIOR ELEVATIONS

Scale: NTS  
Date: 09/06/2023  
Revisions: 100% OWNER REVIEW  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

A-201


Facilities: 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861

© Copyright 2006-2009, United States Postal Service

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RECORDATION,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

DESIGNER	DC
PROJECT MANAGER	DL
DRAWING NO.	2022359.19

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501

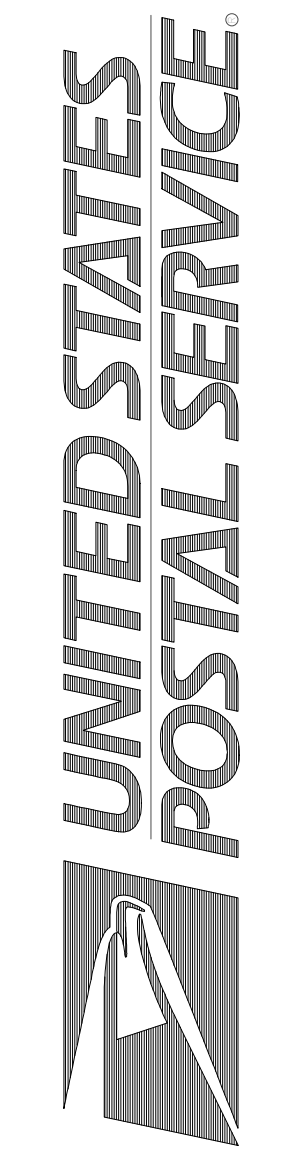

Facilities: 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861

ENLARGED PLANS

Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

Revisions: 100% OWNER REVIEW  
Date: 09/05/2023

**GENERAL NOTES**

- A. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- B. BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- C. DO NOT SCALE DRAWINGS.
- D. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- E. COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LAND/ORDINANCE OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- F. GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- G. WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- H. WHEN WORK NOT SPECIFICALLY CALLED OUT IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- I. GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.
- J. COORDINATE ALL NEW FLOOR, BASE, WALL AND CEILING FINISHES WITH FINISH PLAN & NOTES.
- K. PROVIDE 2 x DRICOR (OR APPROVED EQUAL) FIRE RETARDANT TREATED WOOD BLOCKING BEHIND GYP. BD. AT ALL FIXTURES, MILLWORK AND EQUIPMENT THAT REQUIRES WOOD BLOCKING FOR INSTALLATION. REPLACE ALL WATER DAMAGED OR DAMAGED BLOCKING UNCOVERED DURING DEMOLITION AS REQUIRED.



**PLAN KEYNOTES**

1. PLUMBING FIXTURES TO BE INSTALLED ONE-FOR-ONE AT EXISTING CONNECTIONS. INSTALL PLUMBING FIXTURES AND ACCESSORIES IN HEIGHT AND LOCATIONS NOTED ON SHEET G-002 AND QUANTITIES AS SPECIFIED IN GENERAL SPECIFICATION.
2. NOT USED.
3. ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPED AND REPAINTED TO MATCH EXISTING PAINT COLOR, VERY COLOR IN FIELD, INCLUDING BUT NOT LIMITED TO PREVIOUSLY PAINTED SCISSORS, GUARD RAILS, METAL DOORS, AND FRAMES ETC. PROVIDE NEW WALL FINISH. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
4. PROVIDE NEW WALL TILE FINISH ON WALLS PREVIOUSLY TILED. SEE FINISH FLOOR PLANS AND 4/A-102 FOR ADDITIONAL INFORMATION REGARDING TILE WALL FINISH.
5. PROVIDE NEW FLOOR AND WALL BASE FINISH PER FINISH PLAN AND FINISH SCHEDULE. INSTALL TRANSITION STRIPS AS REQUIRED PER FINISHES.
6. PROVIDE NEW ACOUSTICAL CEILING TILE AND GRID. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL DRAWINGS. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
7. REPAIR ANY DAMAGED AREAS OF GYPSUM BOARD CEILING AND PAINT CEILING COMPLETE. PROVIDE NEW LED LIGHTING. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL DRAWINGS. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION REGARDING NEW CEILING FINISH.
8. PROVIDE NEW DRINKING FOUNTAIN/BOTTLE FILLER. INSTALL PER ADA HEIGHT. SEE G-002 FOR ADDITIONAL INFORMATION. COORDINATE WITH PLUMBING DRAWINGS.
9. PROVIDE NEW LUNCH ROOM TABLES AND CHAIRS. ALL FURNITURE TO BE PROVIDED BY G.C. FROM DRINKER SUPPLIES. REINSTALL ALL BREAK ROOM TACKBOARDS AND BULLETIN BOARDS. COORDINATE ALL EQUIPMENT LOCATION WITH USPS.
10. PROVIDE NEW SPECIALTY EQUIPMENT (NON-SCOOP ICE MACHINE, MICROWAVE, AND REFRIGERATOR). ALL EQUIPMENT TO BE PROVIDED BY G.C. FROM DRINKER SUPPLIER. COORDINATE LOCATION OF ALL SPECIALTY EQUIPMENT WITH USPS.
11. PROVIDE NEW MILLWORK, COUNTERTOP, AND SINK. COORDINATE WITH PLUMBING DRAWINGS. SEE A-501 FOR ADDITIONAL INFORMATION.
12. EXISTING METAL LOCKERS TO REMAIN. CLEAN STICKERS AND RESIDUE OFF OF LOCKERS.
13. NOTED RESTROOM IS TO BE BROUGHT UP TO CURRENT ACCESSIBILITY CODE WITH PLUMBING FIXTURES AND ACCESSORIES IN HEIGHT AND LOCATIONS NOTED ON SHEET G-002 AND QUANTITIES SPECIFIED IN GENERAL SPECIFICATIONS.


**LOCKER COUNT**

	MEN'S LOCKER ROOM:	WOMEN'S LOCKER ROOM:
EXISTING:	137	28
PROPOSED:	TBD	TBD


**KEY PLAN**

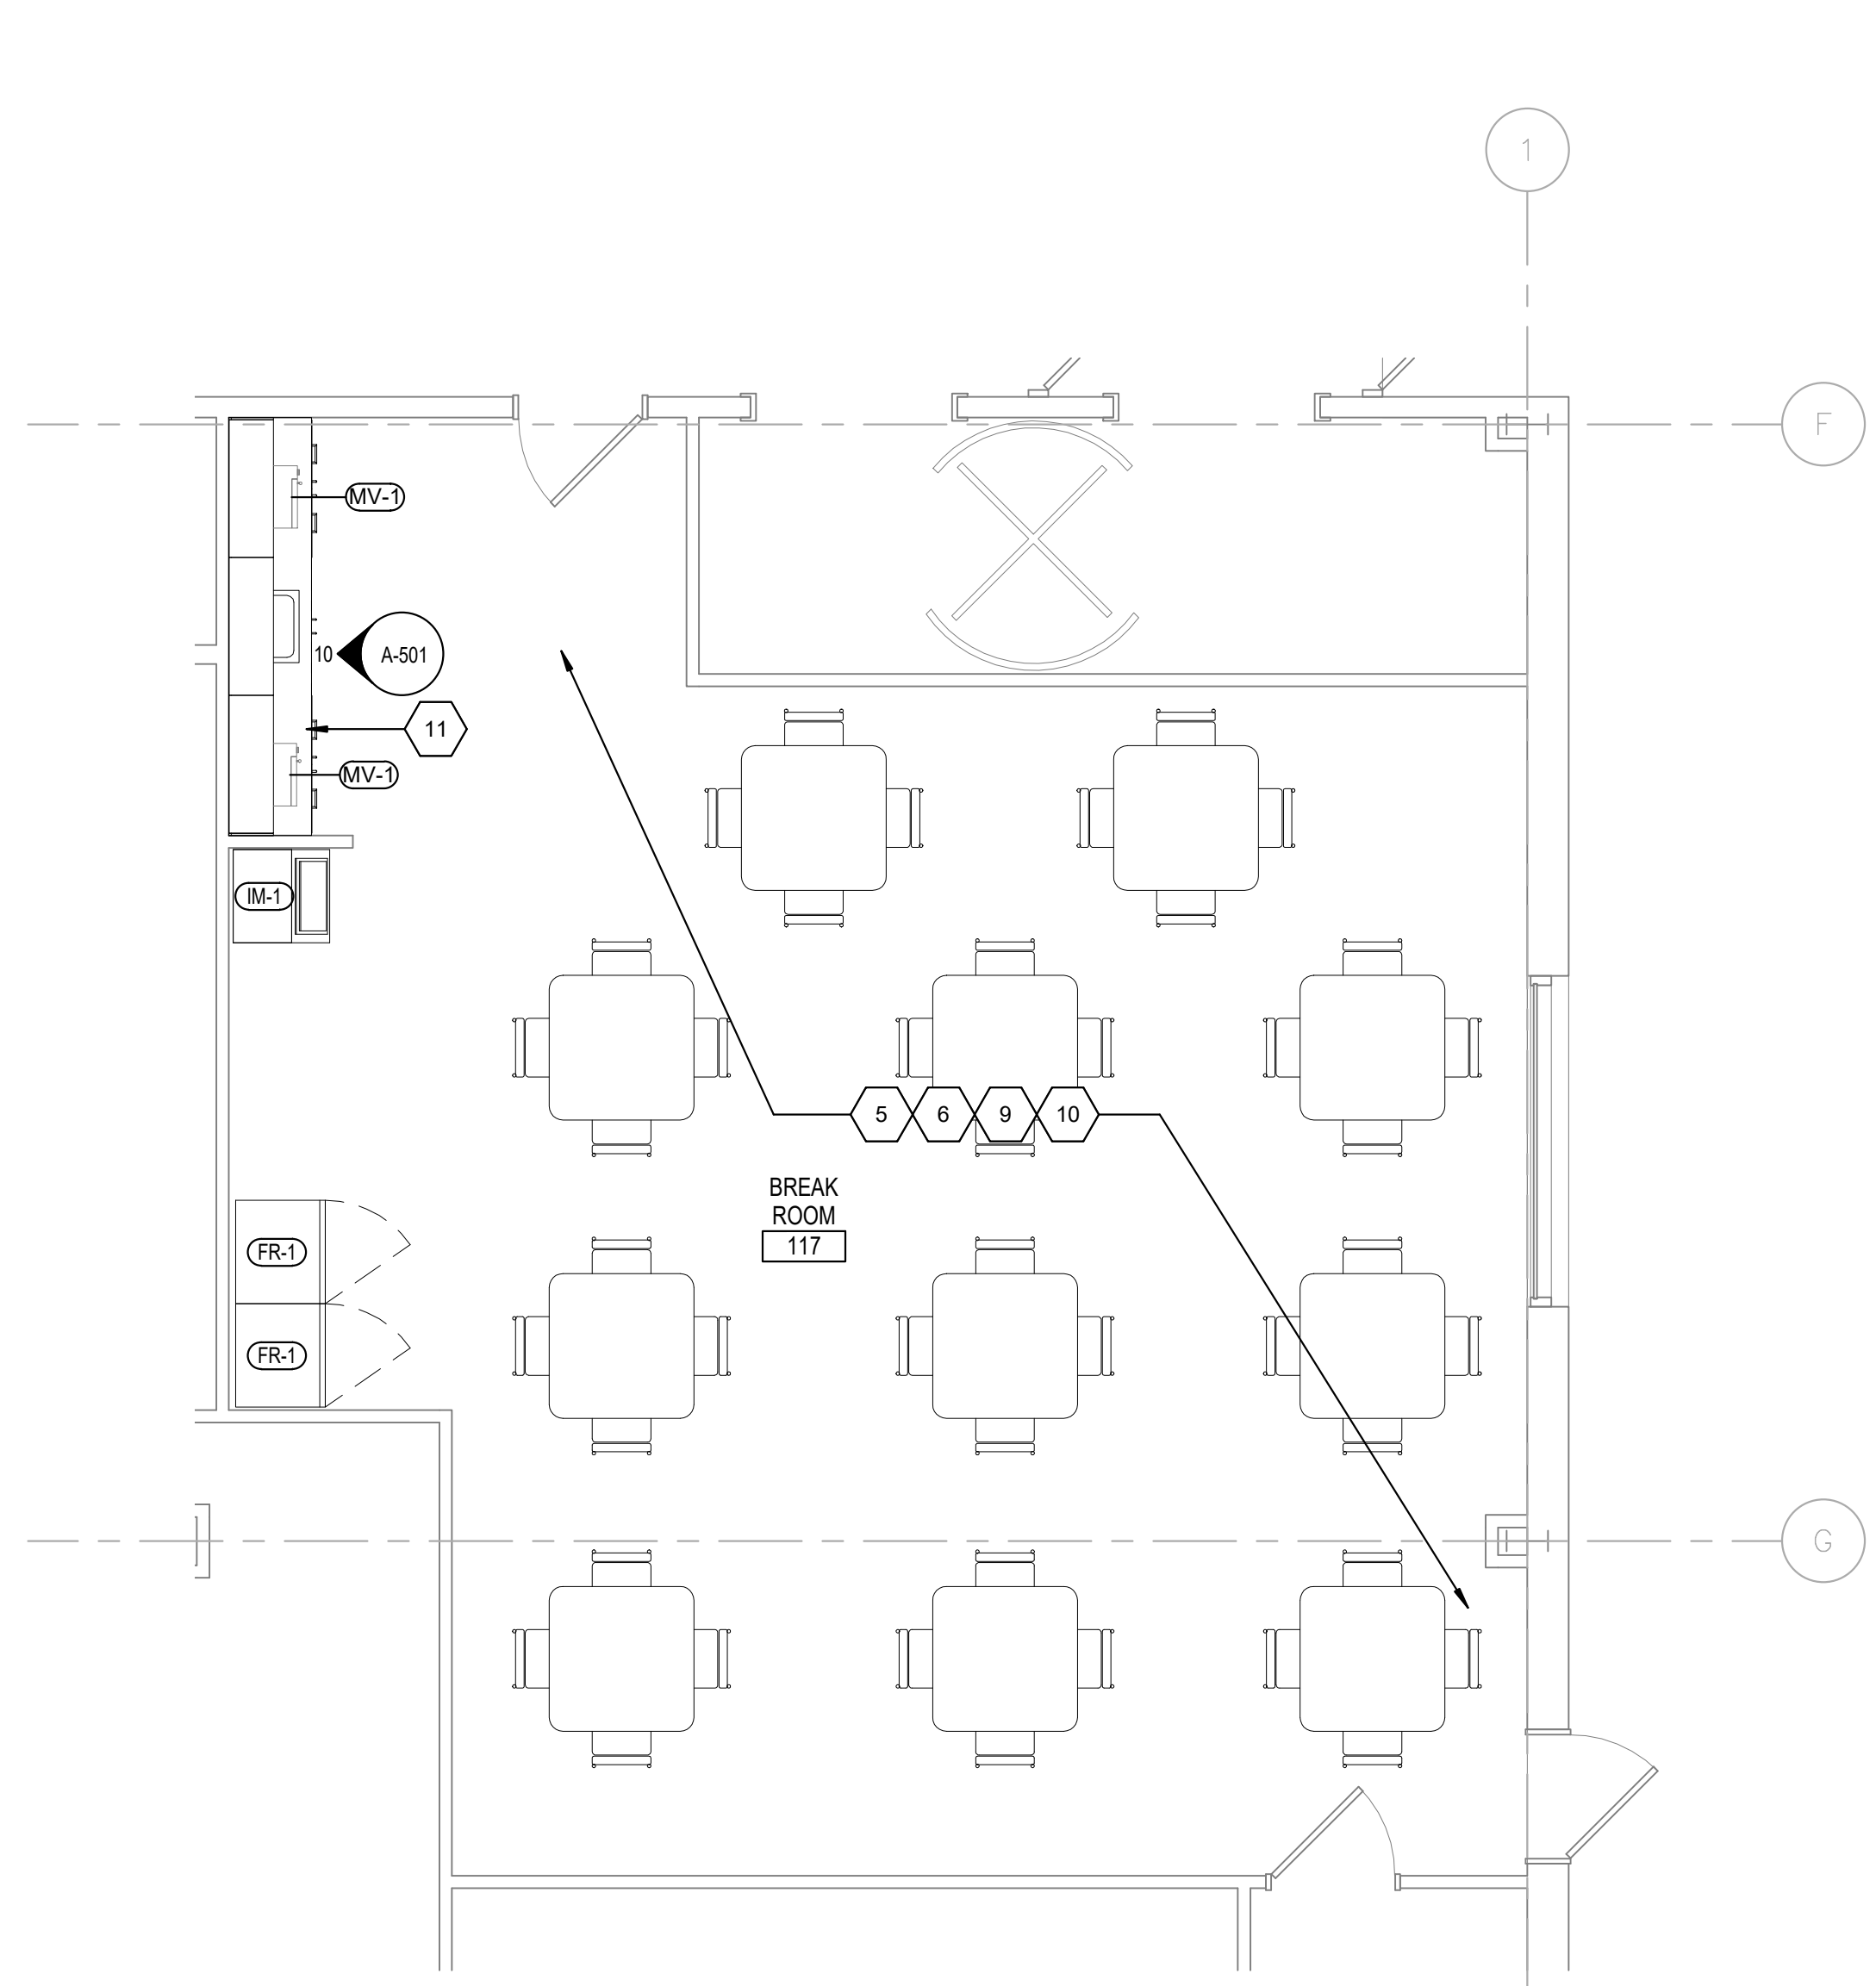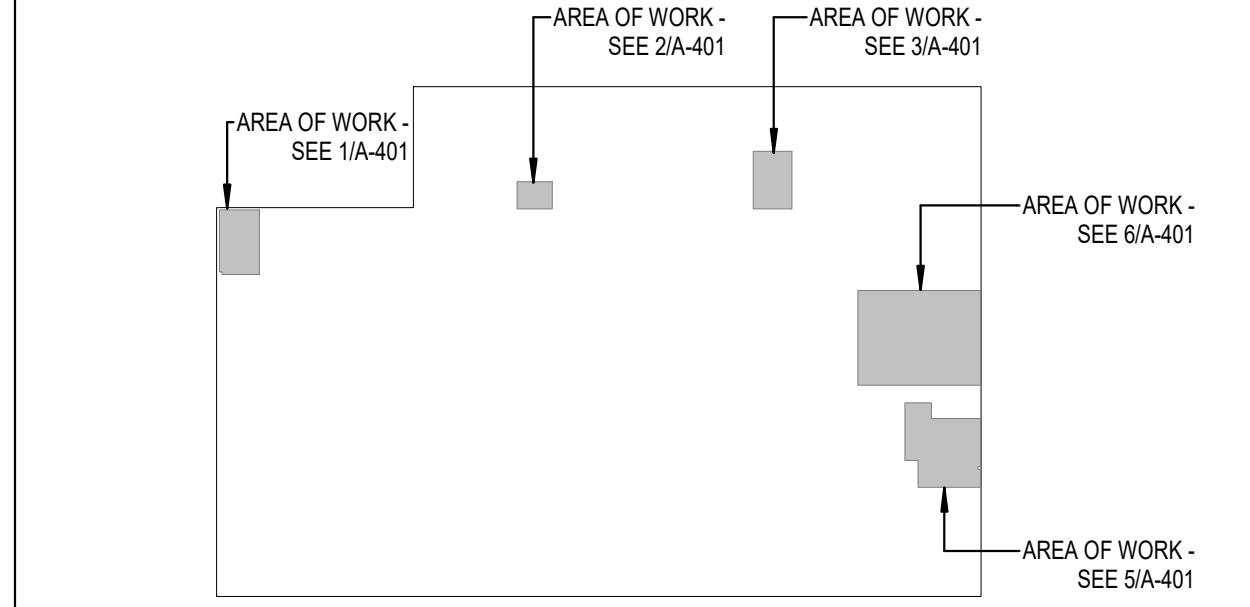


5 ENLARGED FLOOR PLAN  
1/4" = 1'-0"

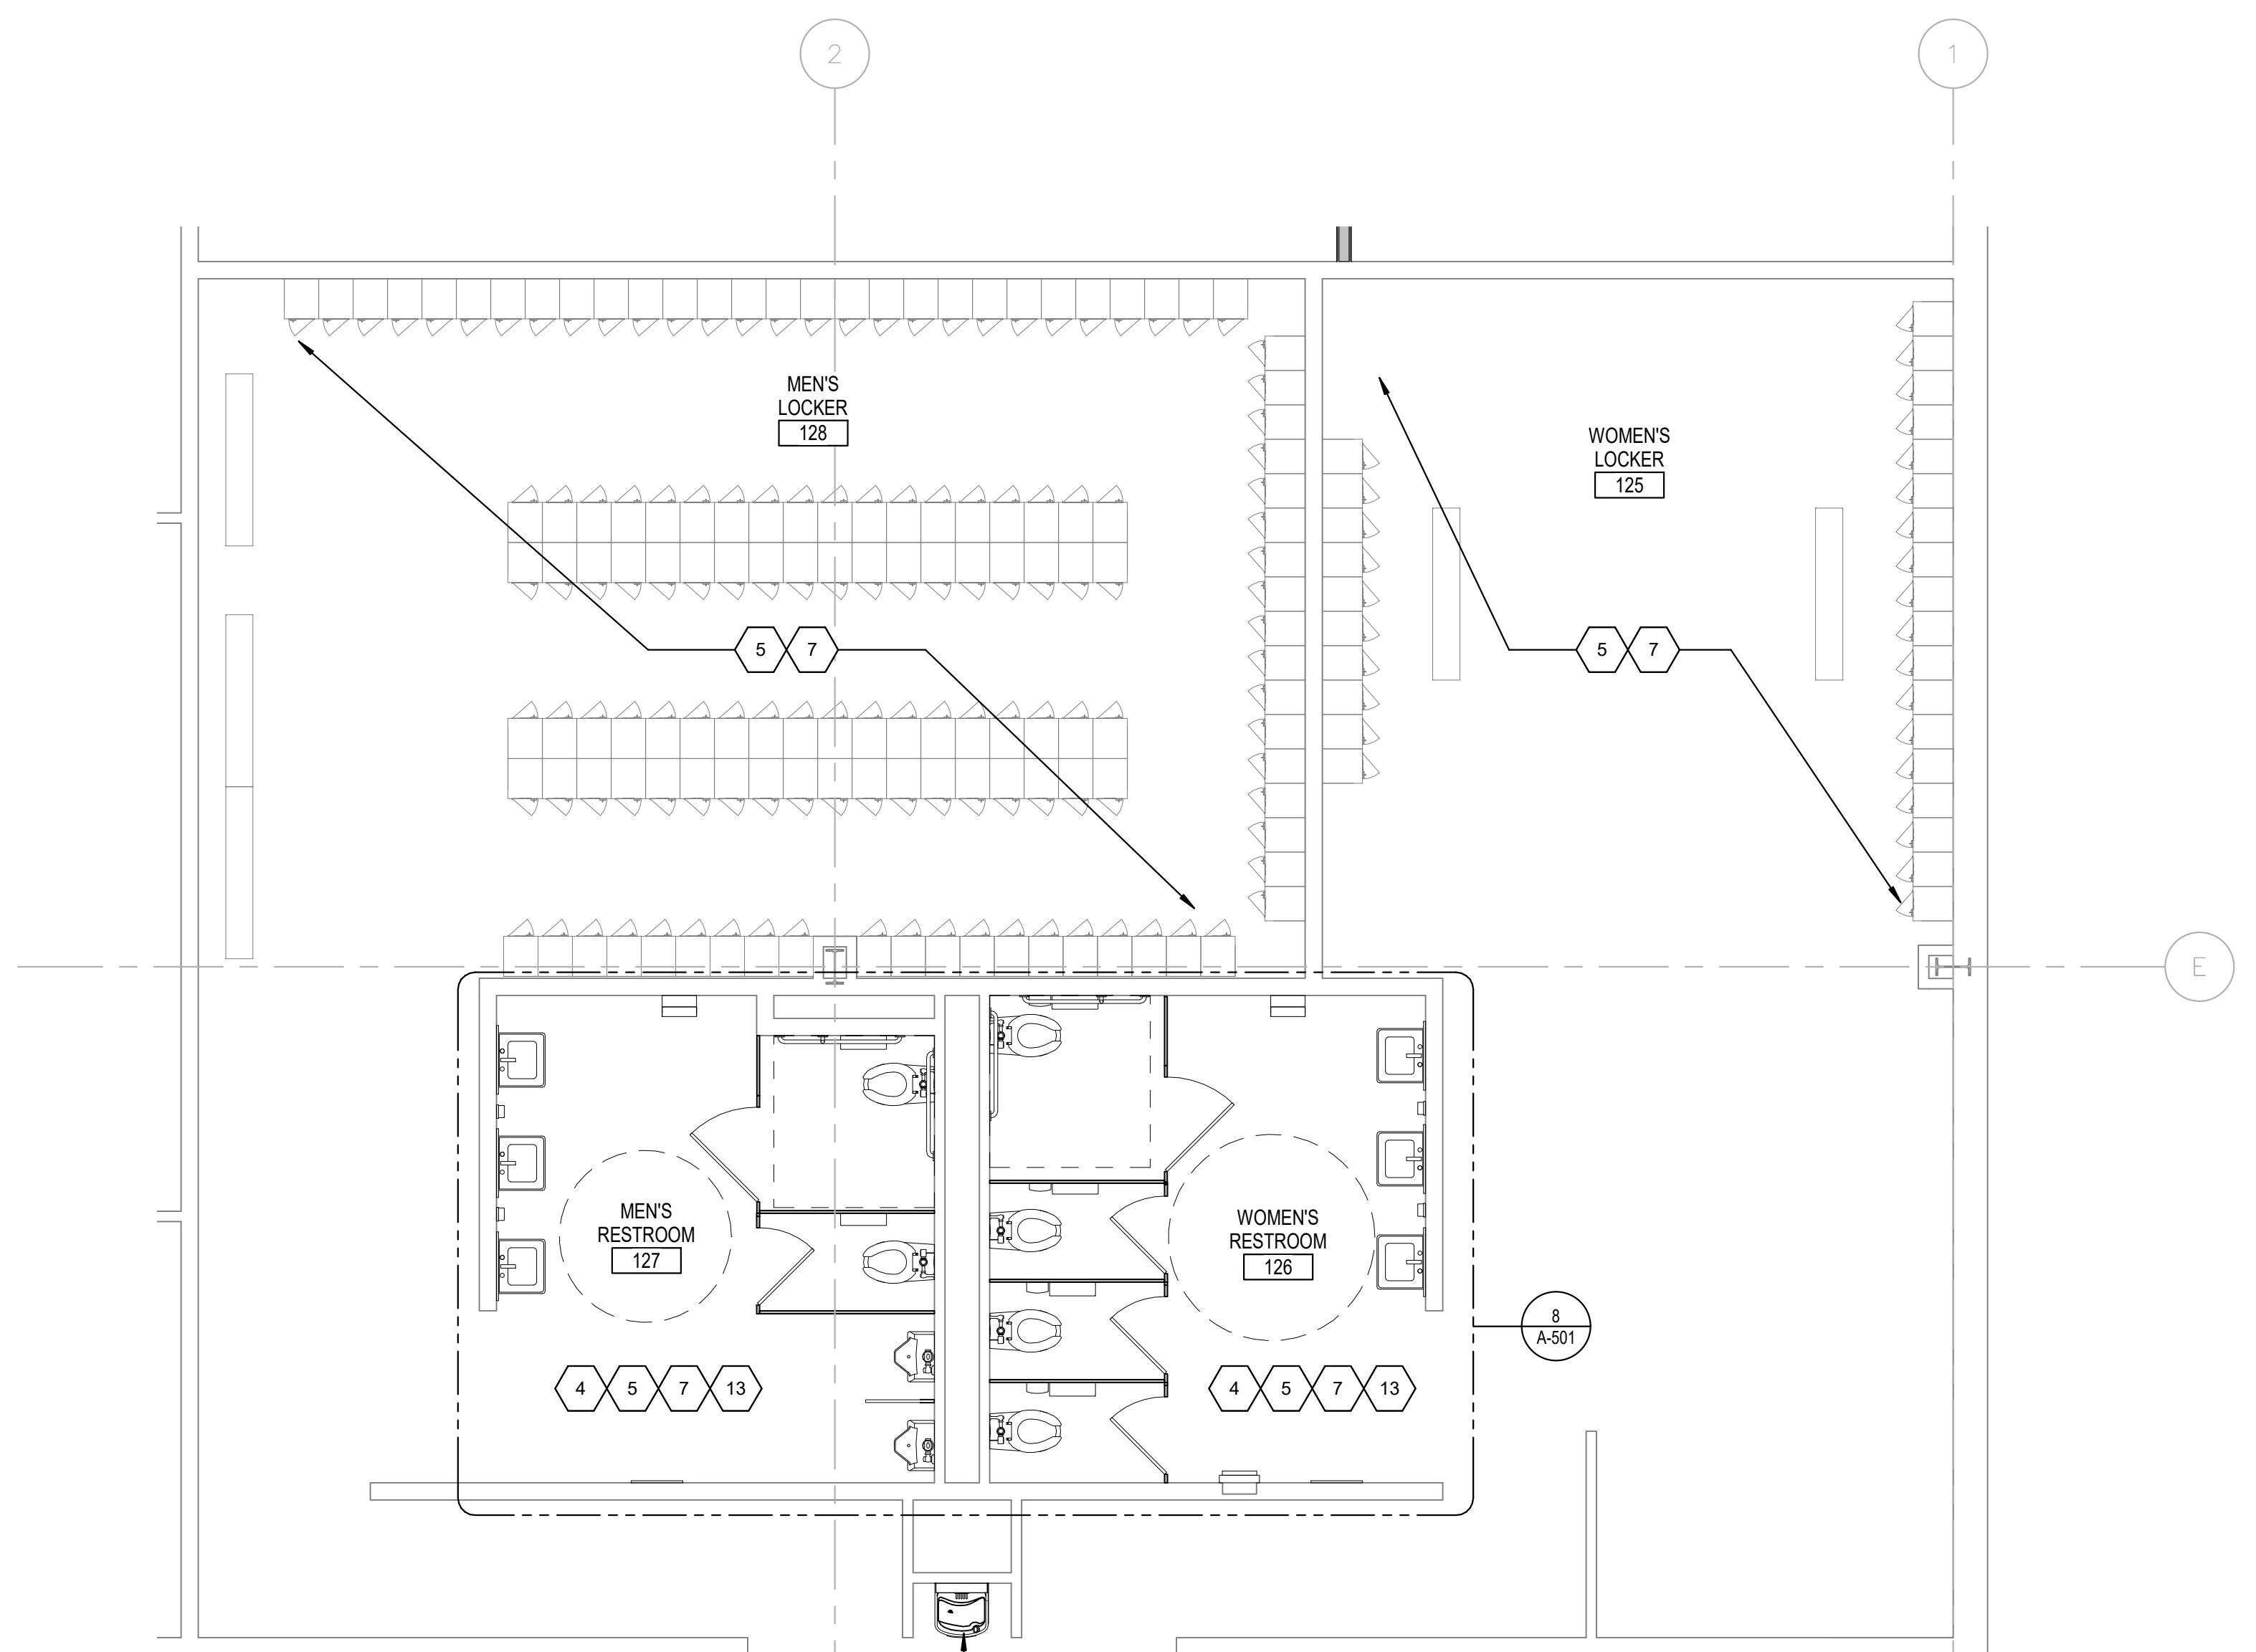


6 ENLARGED FLOOR PLAN  
1/4" = 1'-0"

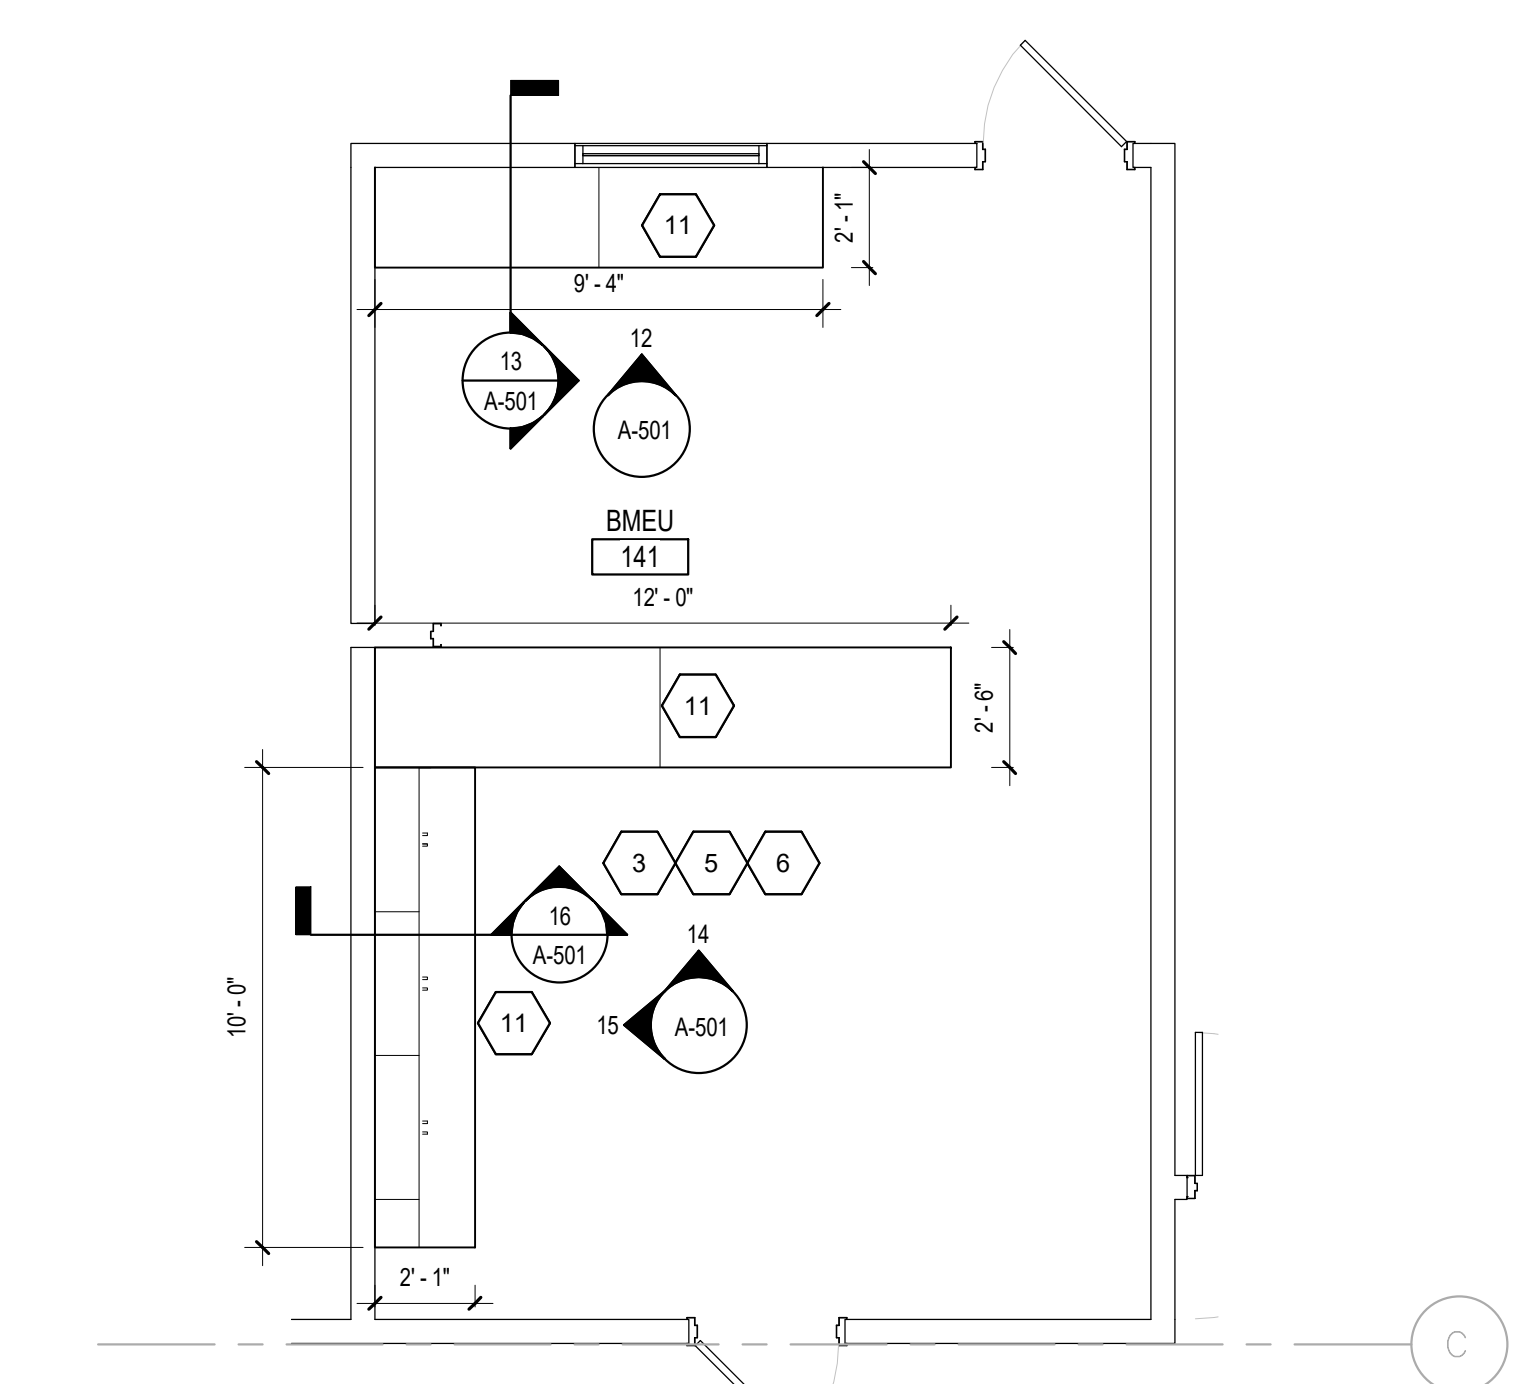

3 ENLARGED FLOOR PLAN  
1/4" = 1'-0"

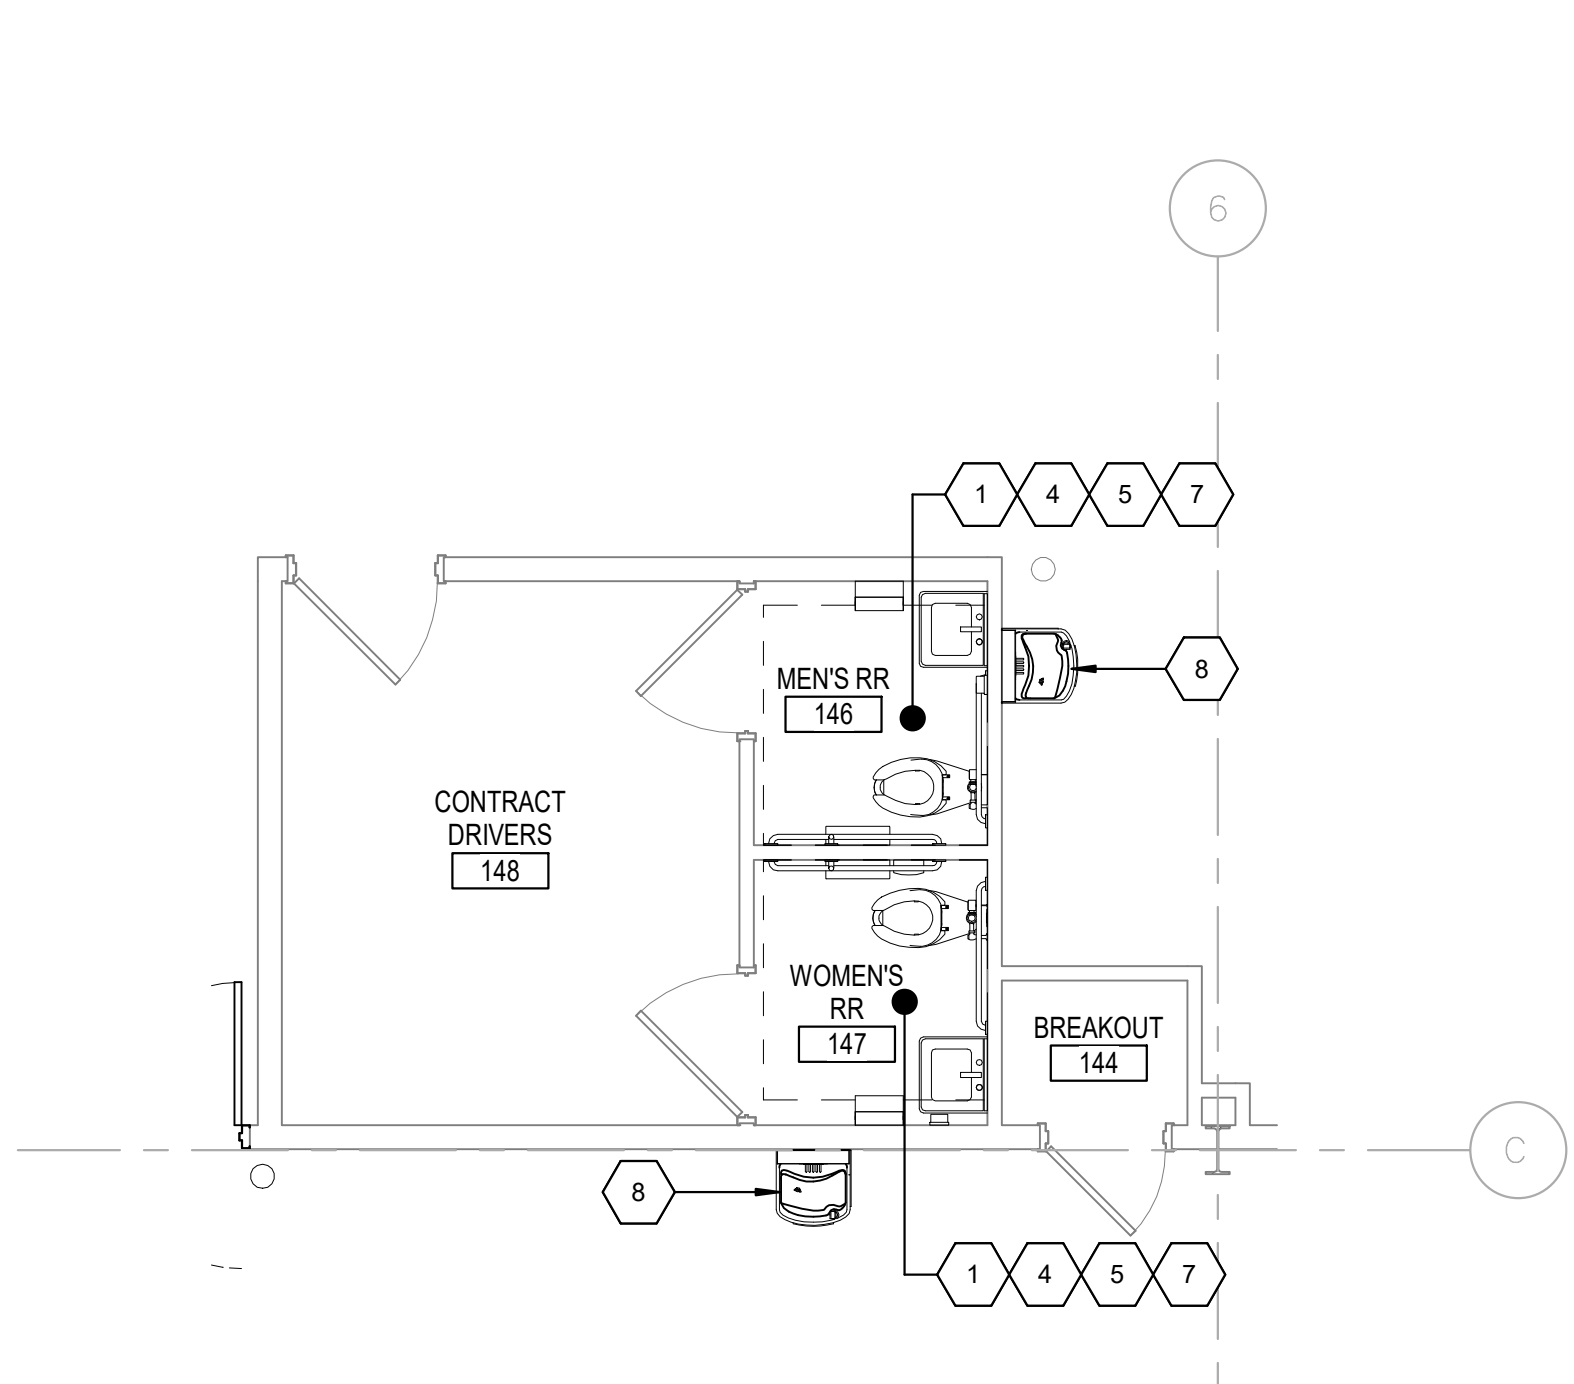

2 ENLARGED FLOOR PLAN  
1/4" = 1'-0"

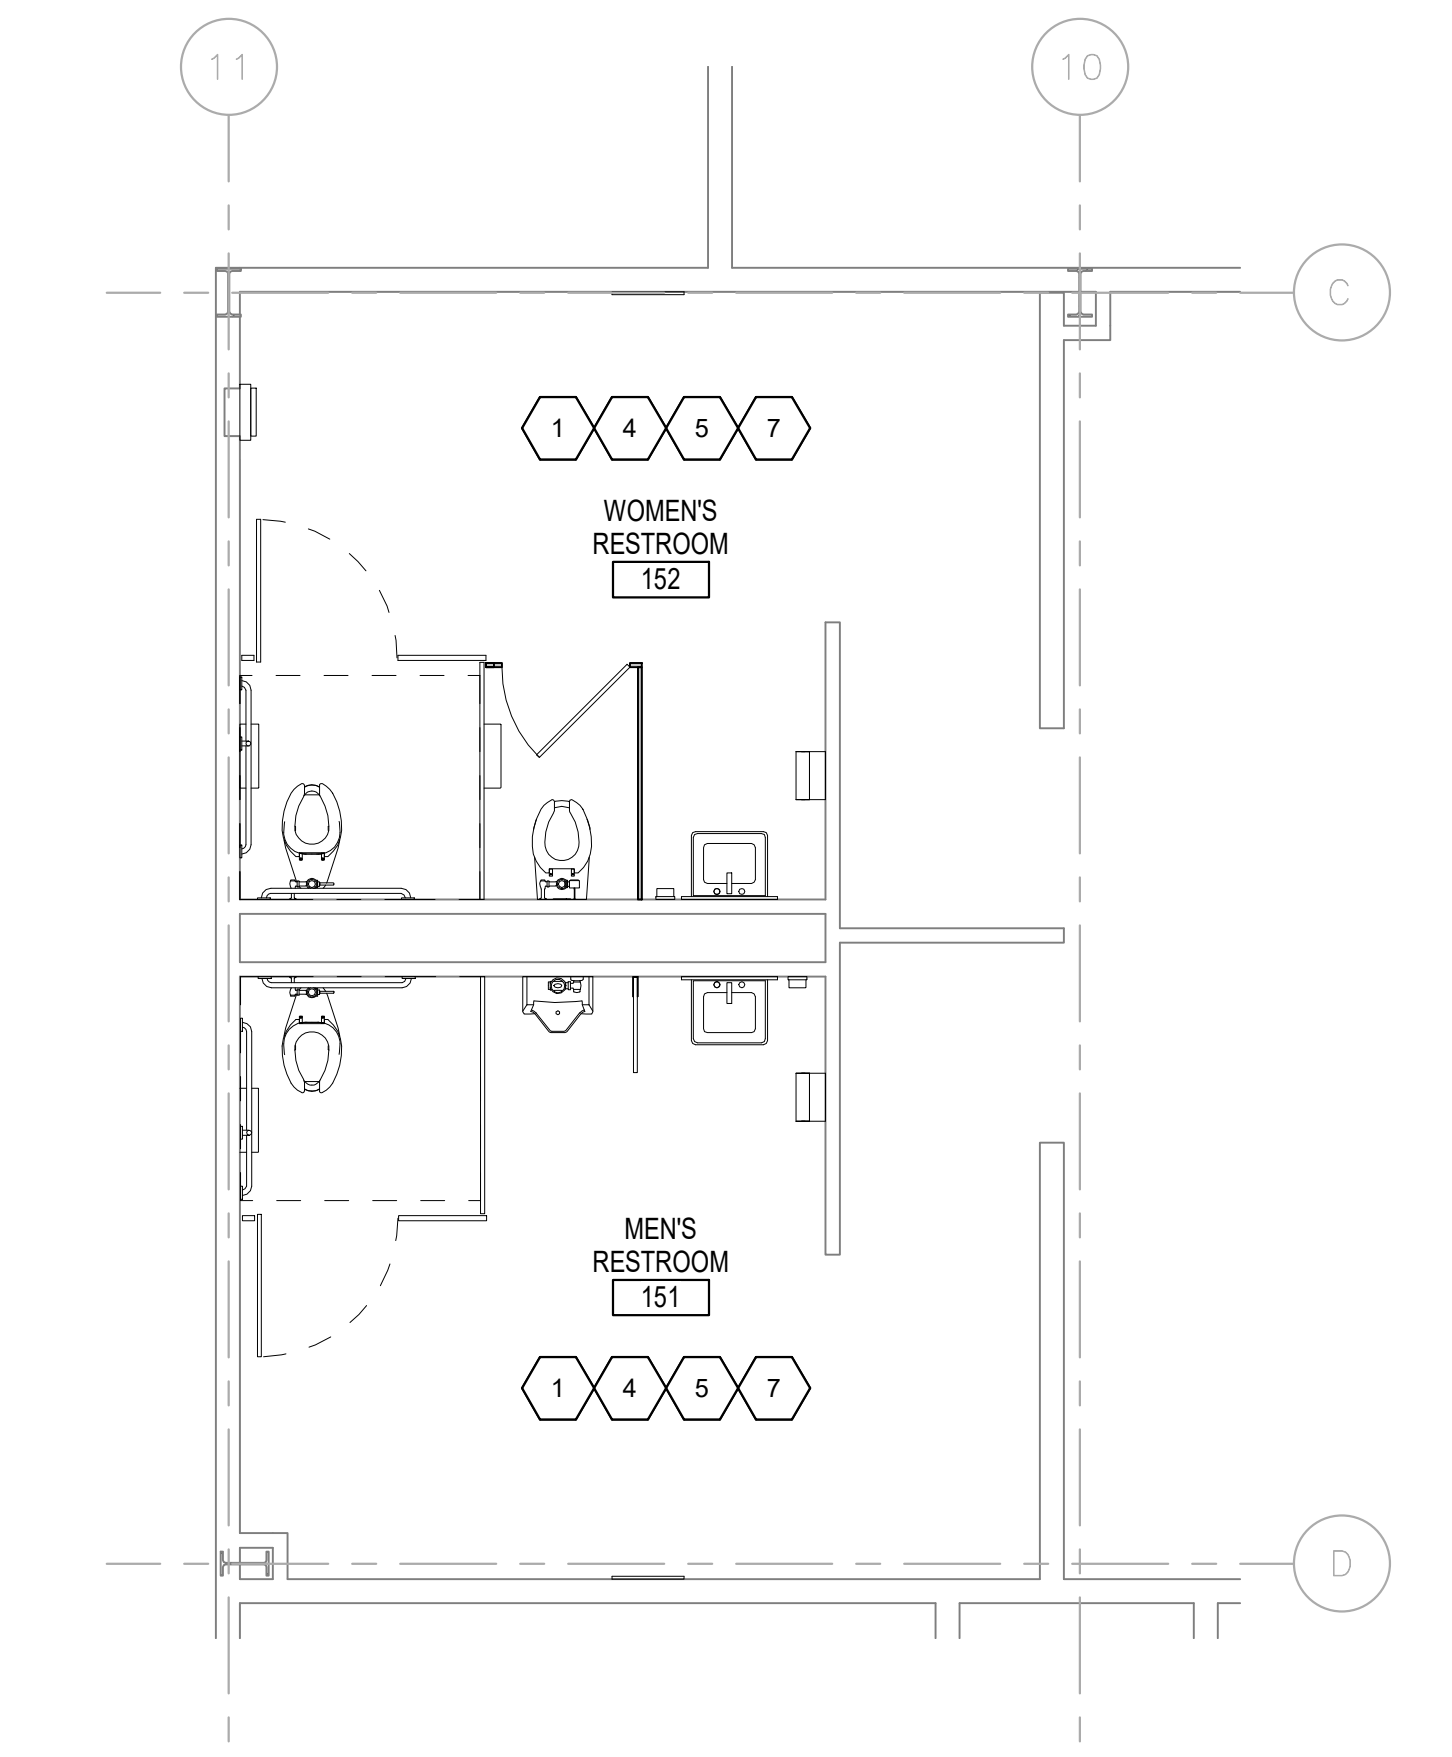


1 ENLARGED FLOOR PLAN  
1/4" = 1'-0"

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RELIANCE,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

PROJECT MANAGER	DESIGNER	AUTHOR
	DESIGNER	
JOB NO.		2022359.19

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501

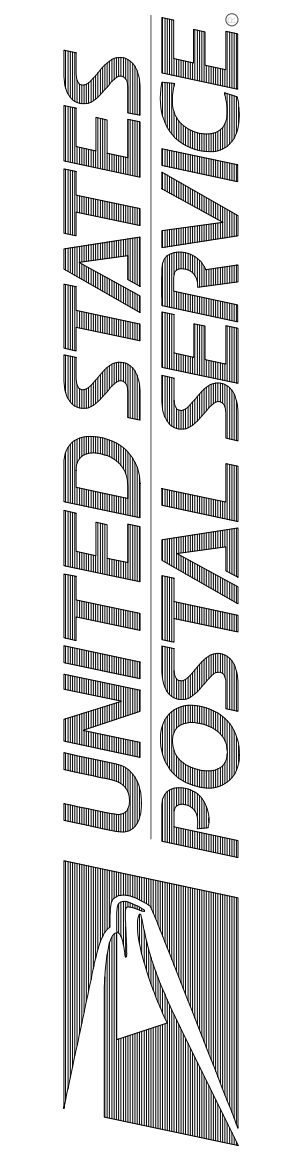

Facilities: 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861

ENLARGED PLANS

A-402

Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

Revisions:




Date:

**GENERAL NOTES**


- IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- DO NOT SCALE DRAWINGS.
- IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS. REQUIREMENTS OF THE TENANT AND LANDSCAPING OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- WHEN WORK NOT SPECIFICALLY CALLED OUT IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.
- COORDINATE ALL NEW FLOOR, BASE, WALL AND CEILING FINISHES WITH FINISH PLAN & NOTES.
- PROVIDE 2 X DRICOR (OR APPROVED EQUAL) FIRE RETARDANT TREATED WOOD BLOCKING FOR GYP. BD. AT ALL FIXTURES, MILLWORK AND EQUIPMENT THAT REQUIRES WOOD BLOCKING FOR INSTALLATION. REPLACE ALL WATER DAMAGED OR DAMAGED BLOCKING UNCOVERED DURING DEMOLITION AS REQUIRED.

**PLAN KEYNOTES**


- 3-5/8" METAL STUD WALL WITH ONE (1) LAYER OF M.R. GYP. BD. ON BOTH SIDES FROM FLOOR TO DECK. SPACE STUDS AT 16" O.C. MAX. PROVIDE CONTINUOUS BOTTOM TRACK TO MATCH STUD GAUGE. ATTACH BOTTOM TRACK TO EXISTING CONCRETE FLOOR WITH (2) 1/4" DIA. PAF 1 1/4" @ 16" O.C. PROVIDE CONTINUOUS DEFLECTION TRACK AT TOP OF WALL TO MATCH STUD GAUGE. ATTACH DEFLECTION TRACK TO UNDERSIDE OF ROOF DECK WITH (2) #10 SCREWS AT 16" O.C.
- SURFACE MOUNTED 4" ROUND STEEL BOLLARDS W/ SAFETY YELLOW HOPL BOLLARD COVERS. LOCATE IN FIELD.
- PROVIDE NEW ACOUSTIC CEILING, GRID AND LIGHTING. COORDINATE LIGHTING LAYOUT WITH ELECTRICAL. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- PROVIDE NEW IMPACT DOOR, FRAME AND ALL ASSOCIATED HARDWARE. SEE DOOR SCHEDULE FOR MORE INFORMATION.
- PROVIDE NEW FLOOR AND WALL BASE FINISH PER FINISH PLAN AND FINISH SCHEDULE. INSTALL TRANSITION STRIPS AS REQUIRED PER FINISHES.
- GC TO PROVIDE SEPARATION GUARDRAIL BETWEEN MAN DOORS AND IMPACT DOORS IN CARRIER VESTIBULE. TO BE INSTALLED PER MANUFACTURER'S INSTALLATION SPECIFICATION.
- PROVIDE NEW WALL FINISH. SEE FINISH PLAN.
- NOT USED.
- REPLACE DAMAGED WOODEN BUMPERS AND REFINISH ALL TO MATCH ADJACENT.
- GC TO PROVIDE AND INSTALL HIGH AND LOW WALL BUMPERS PER USPS SPECIFICATIONS.
- PROVIDE NEW FROST SLAB AT EXTERIOR ENTRIES. SEE STRUCTURAL FOR DETAILS.

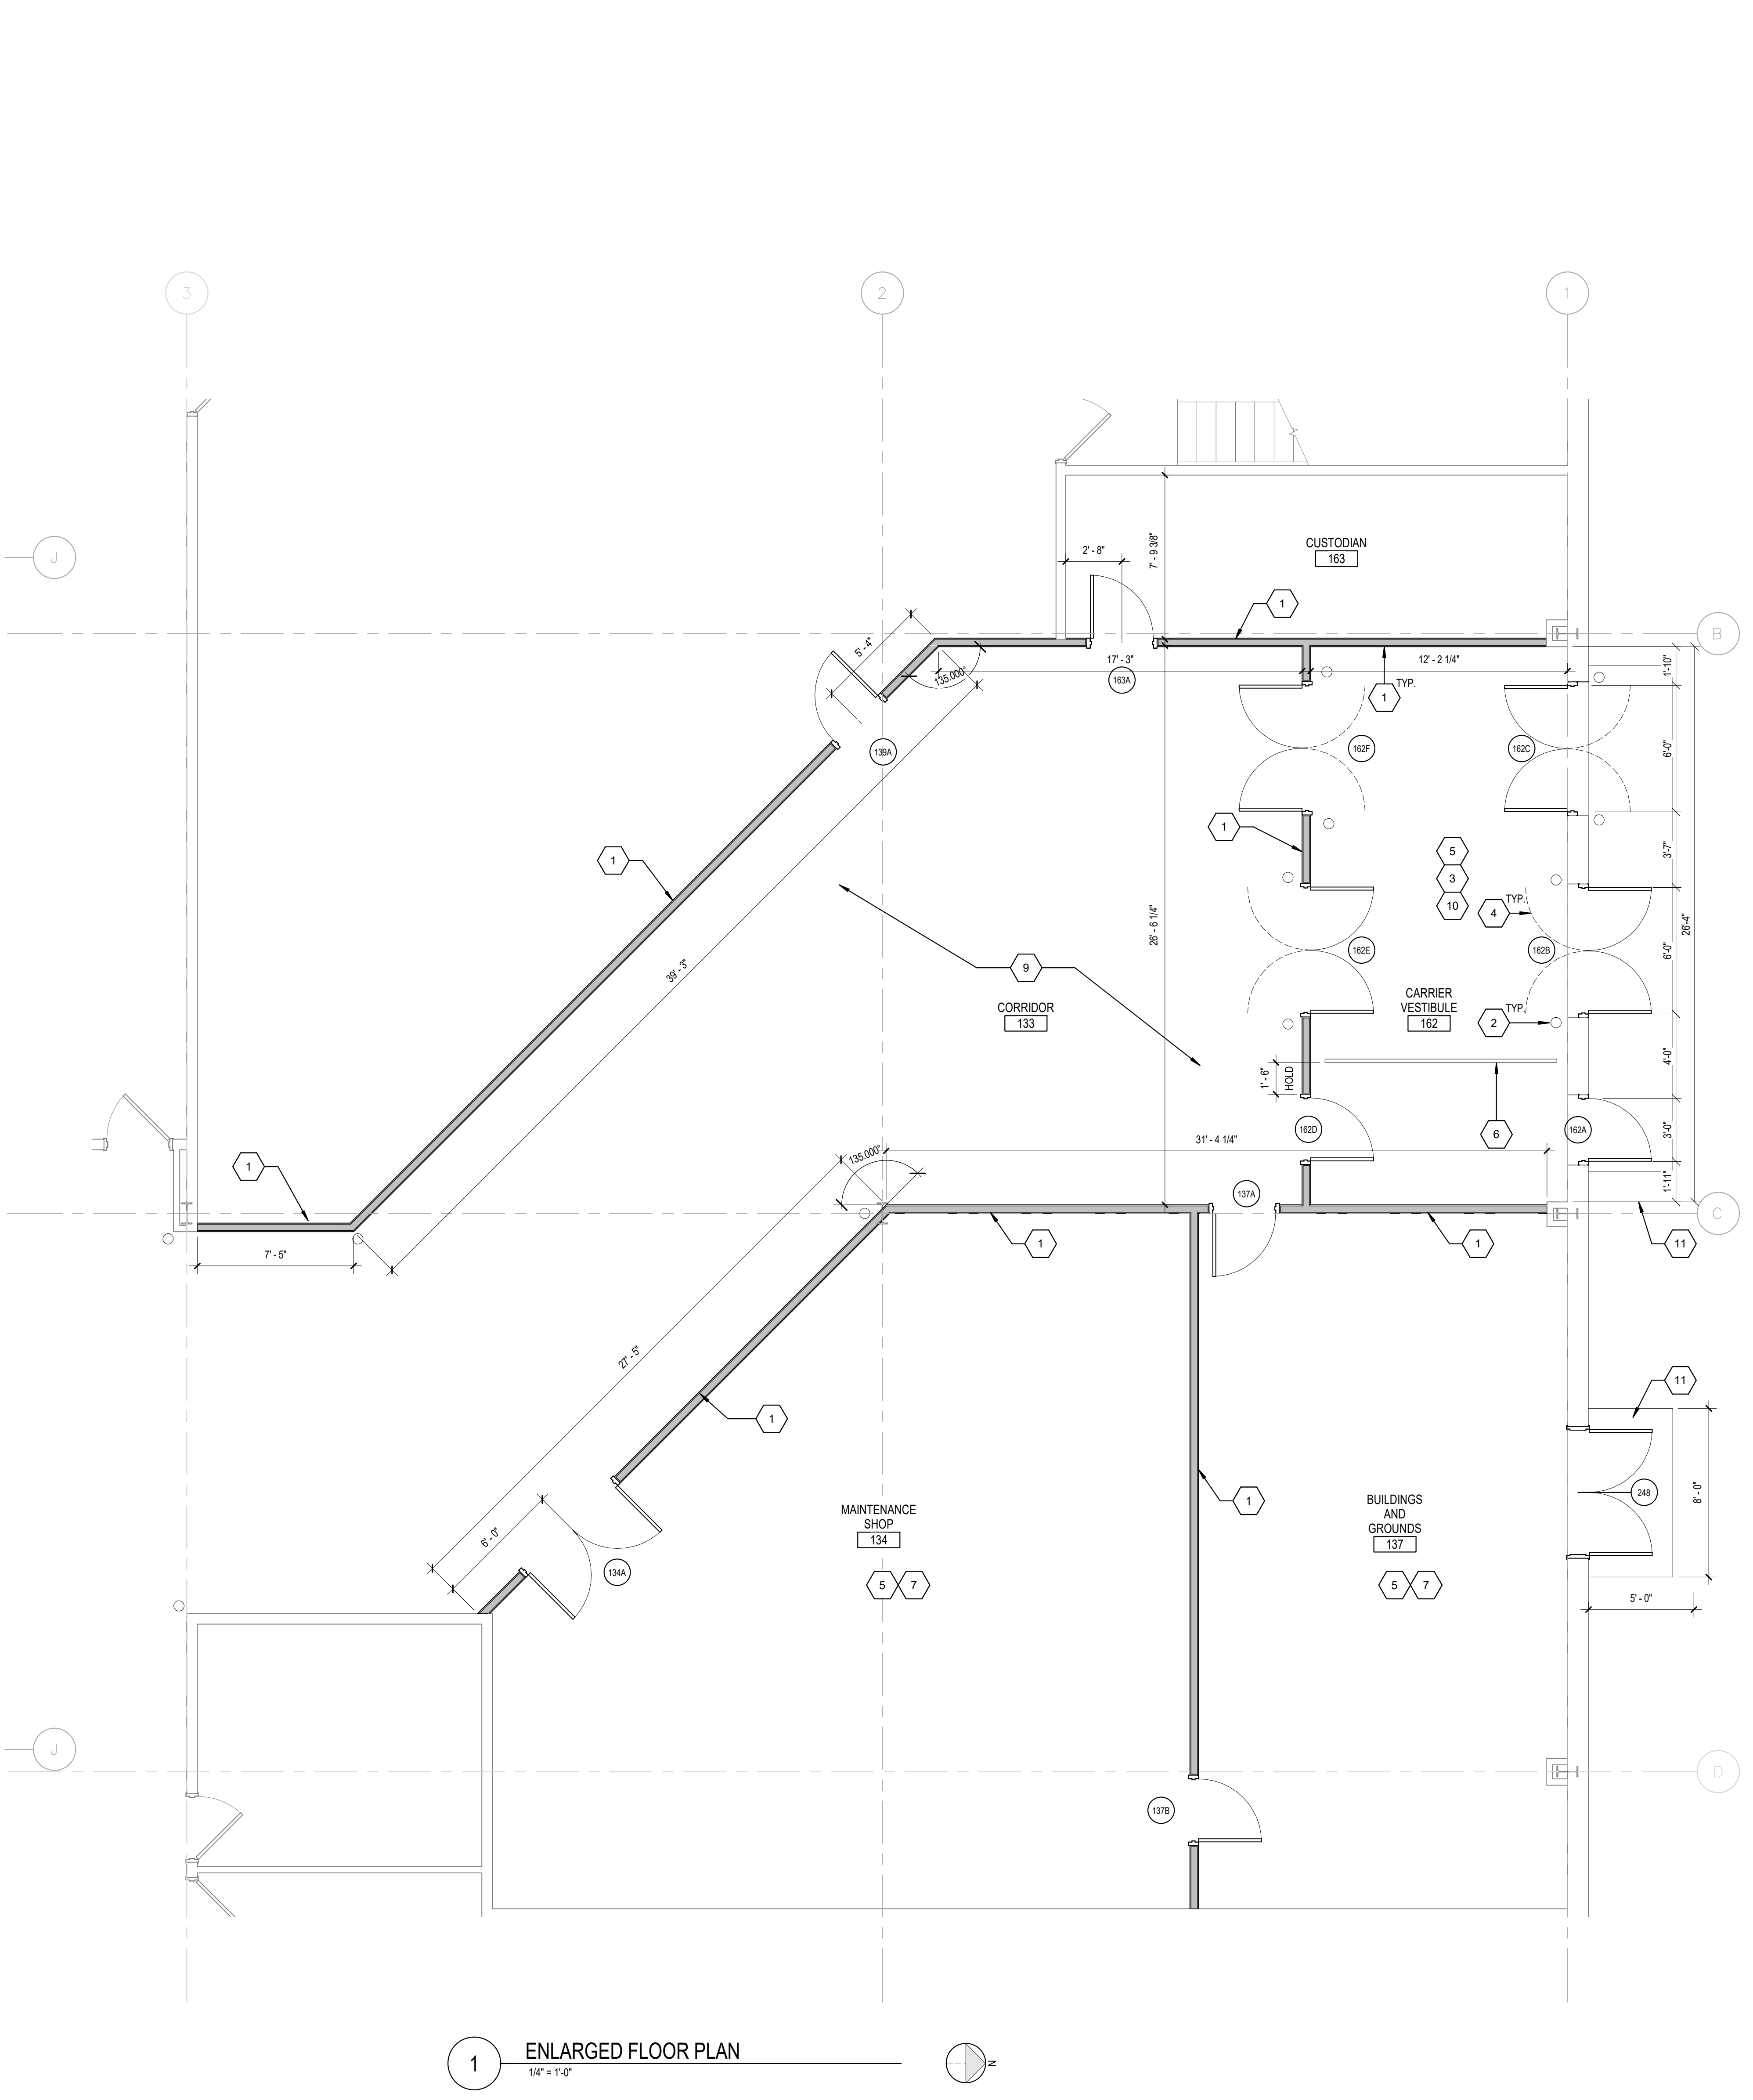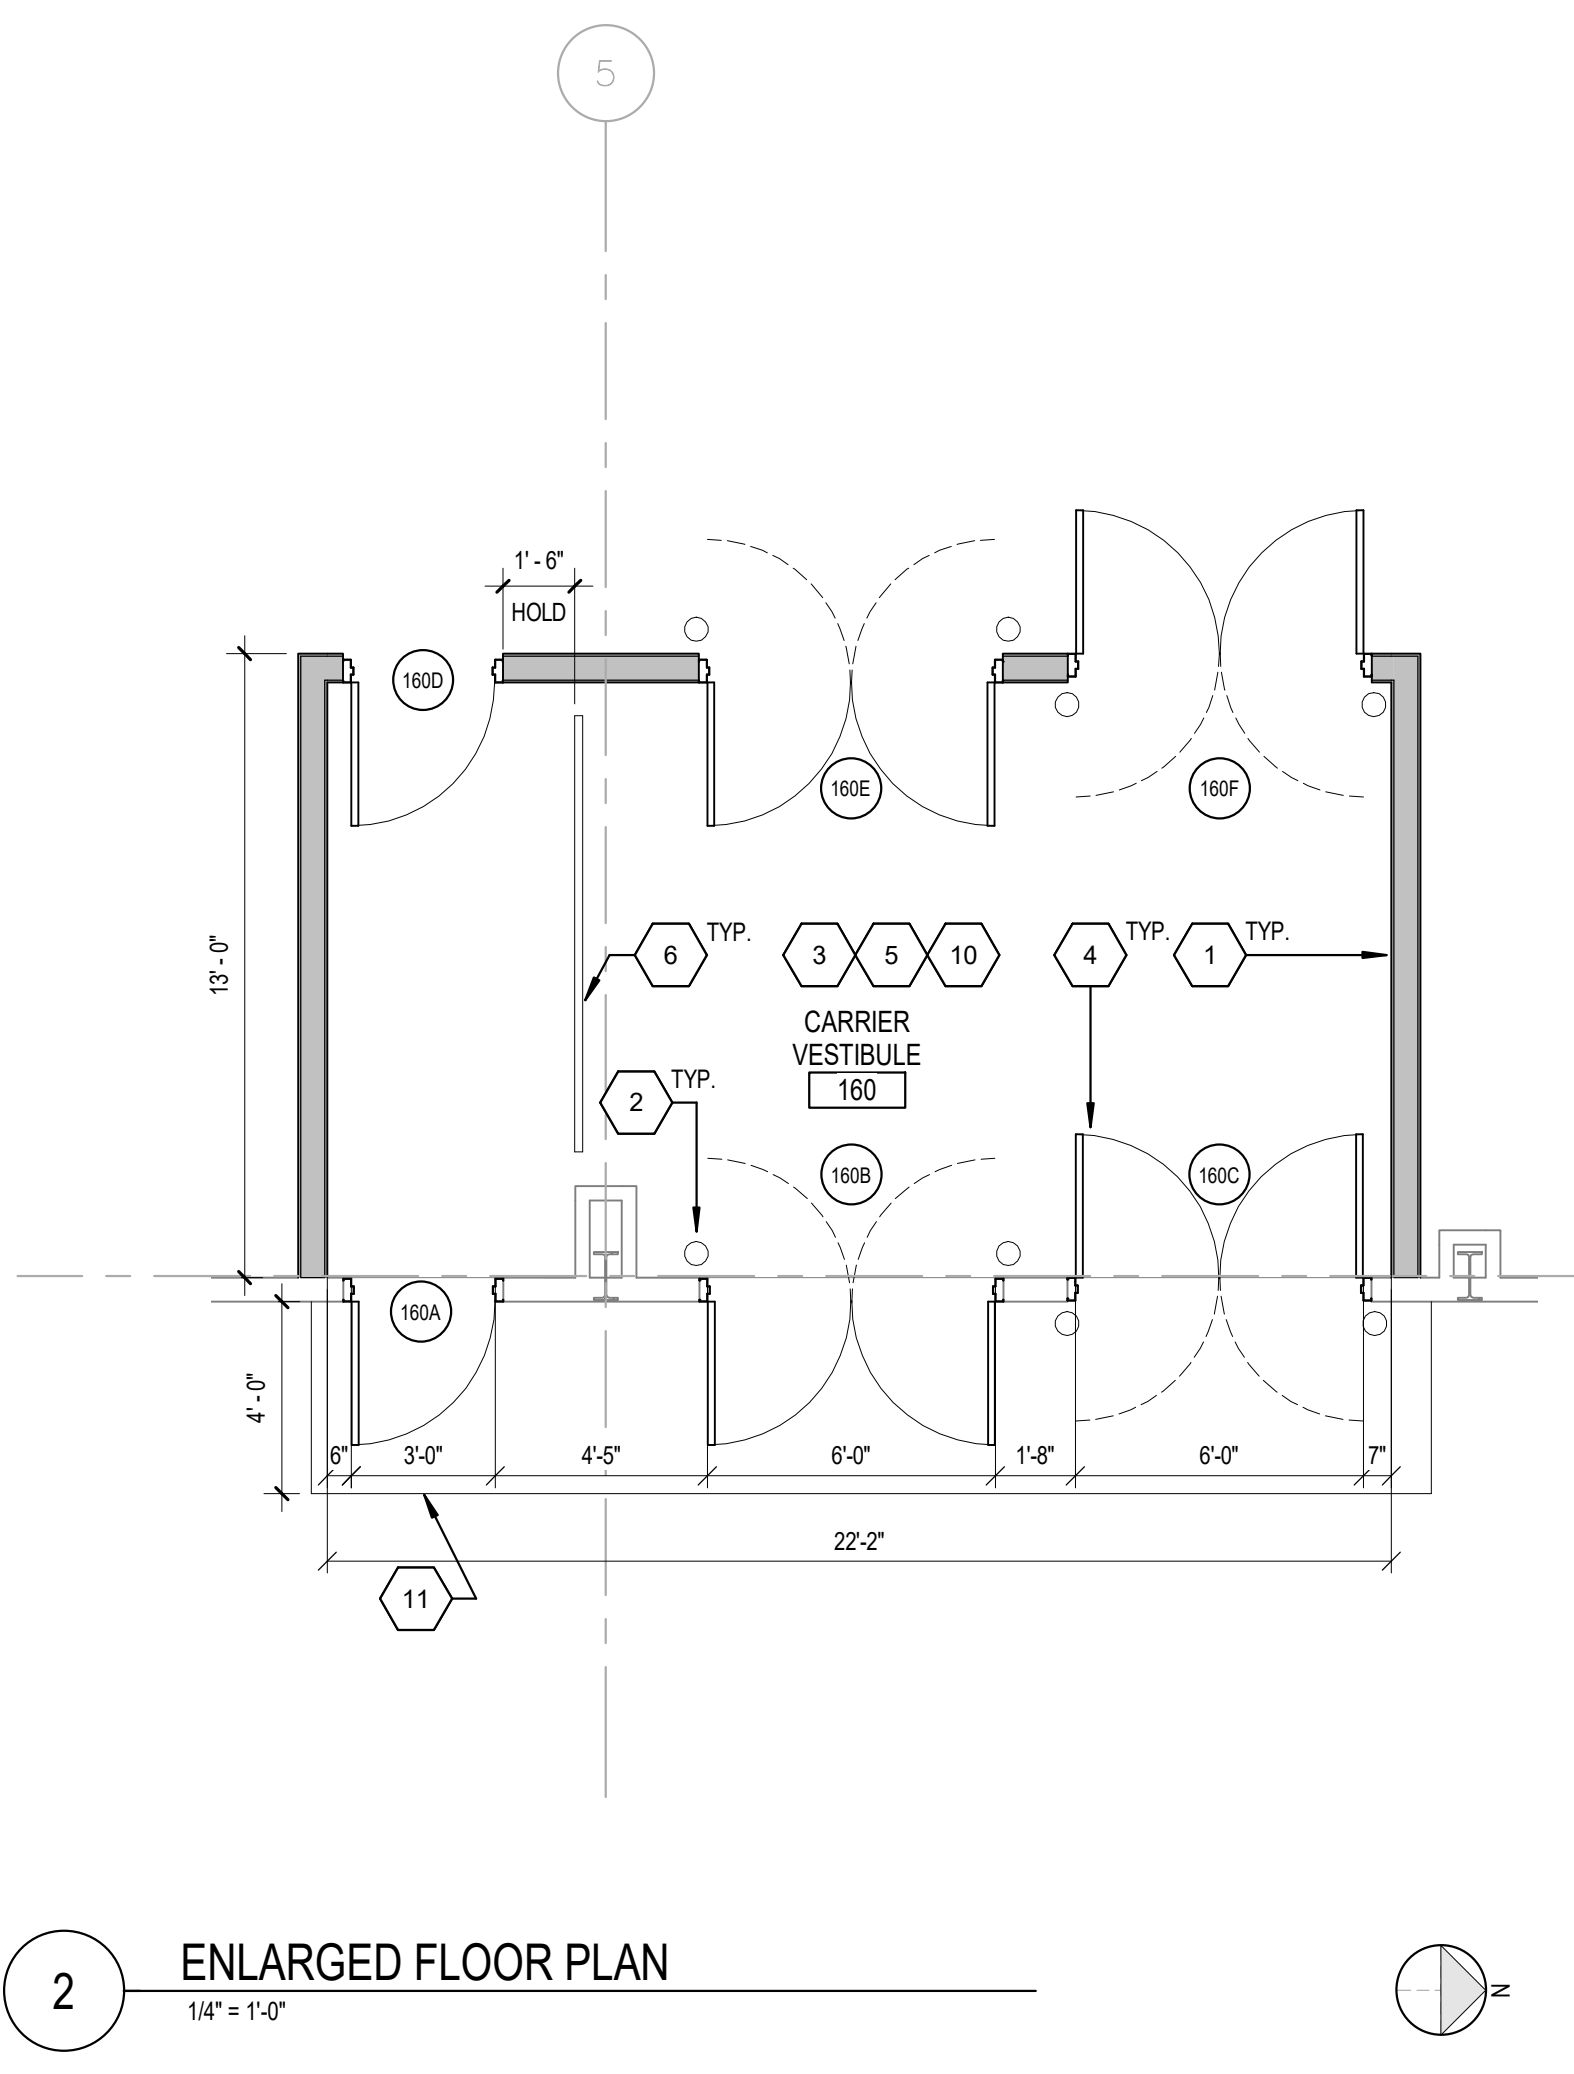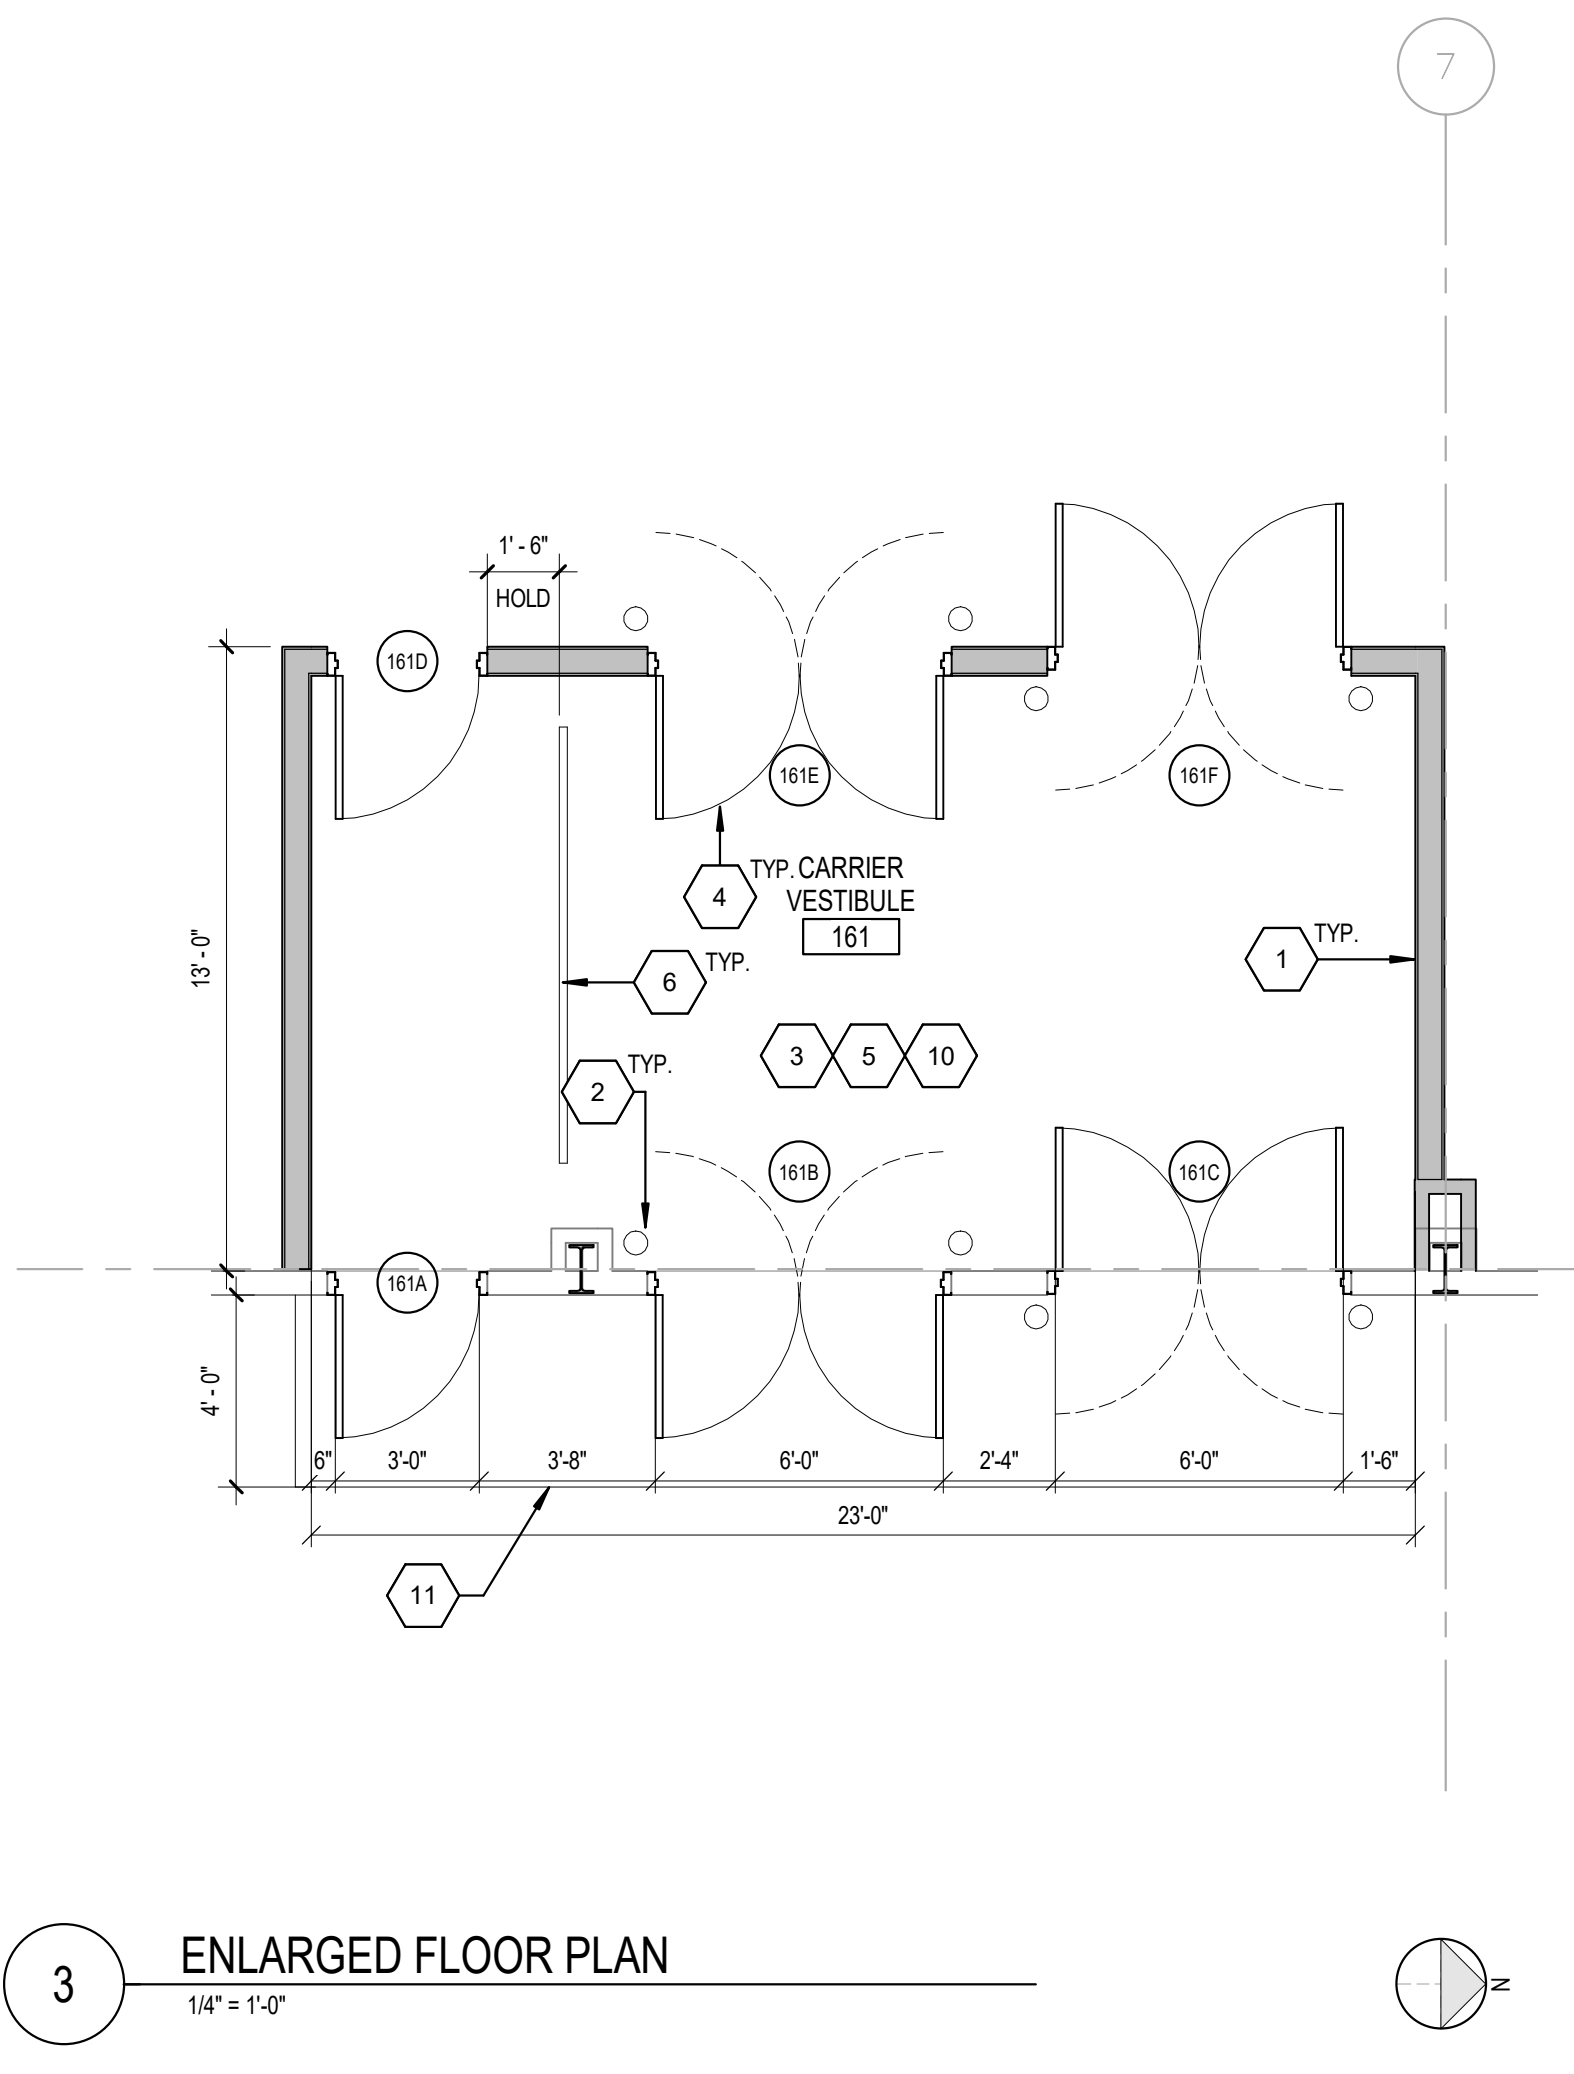

**KEY PLAN**

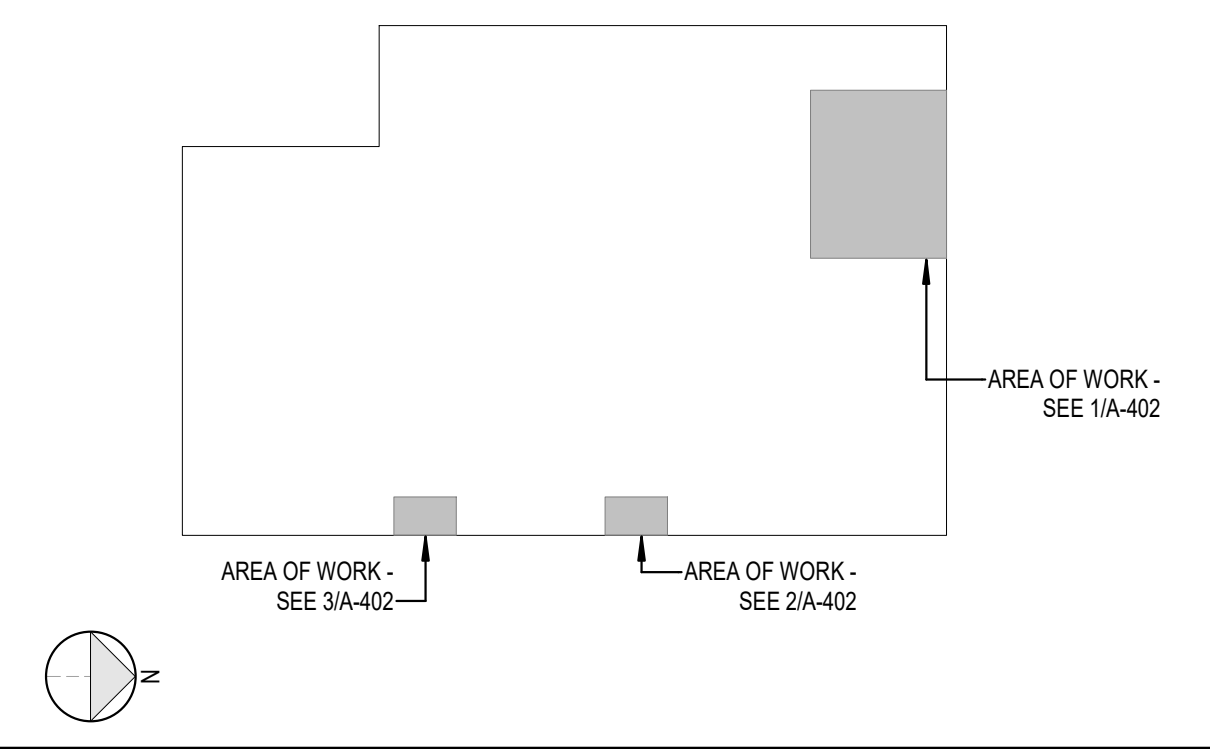



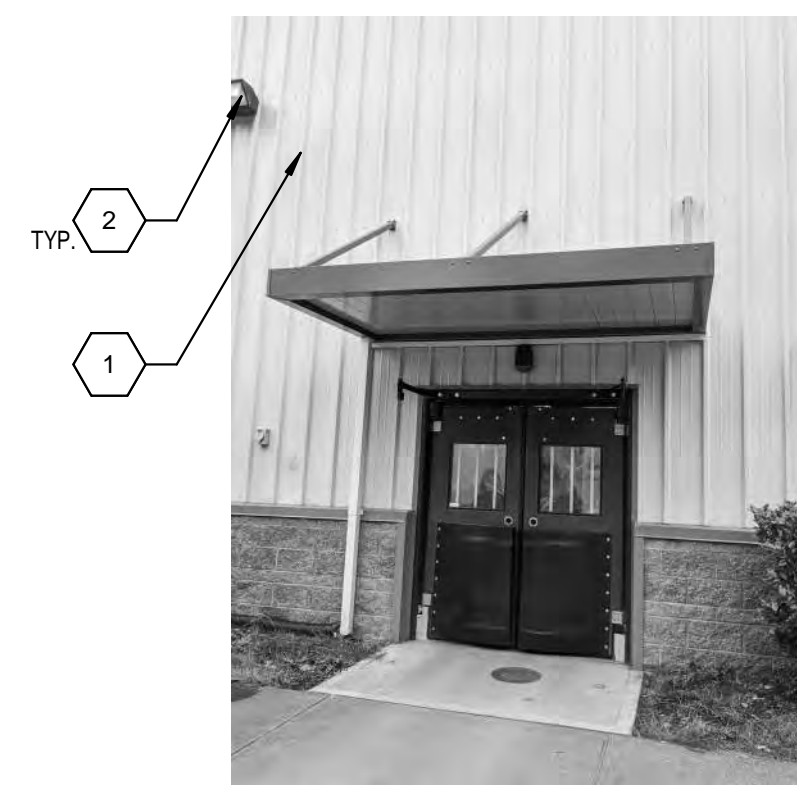


17 REFERENCE PHOTO



18 REFERENCE PHOTO




19 REFERENCE PHOTO

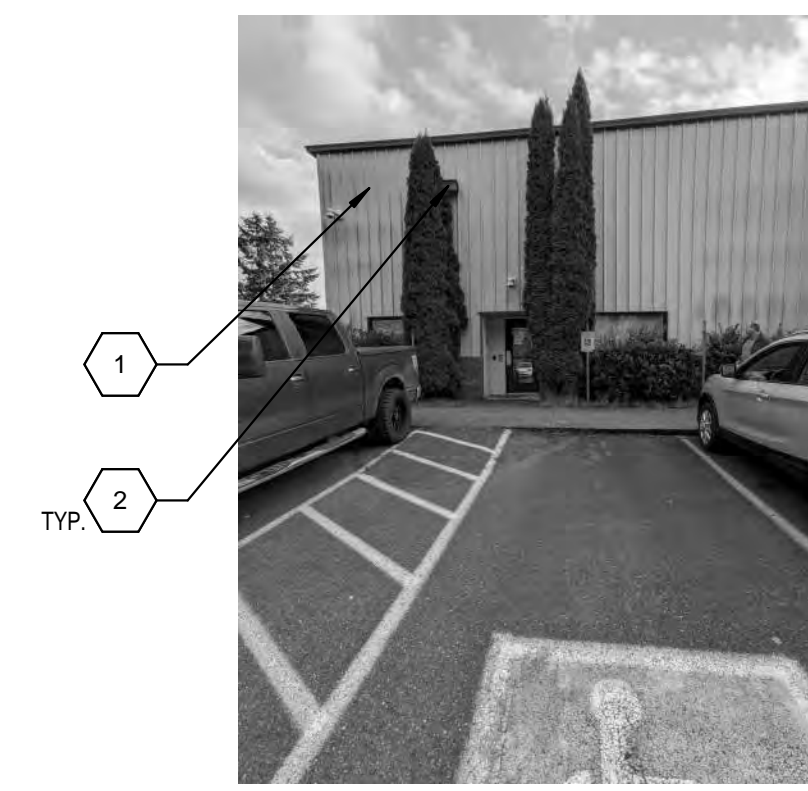


20 REFERENCE PHOTO



13 REFERENCE PHOTO

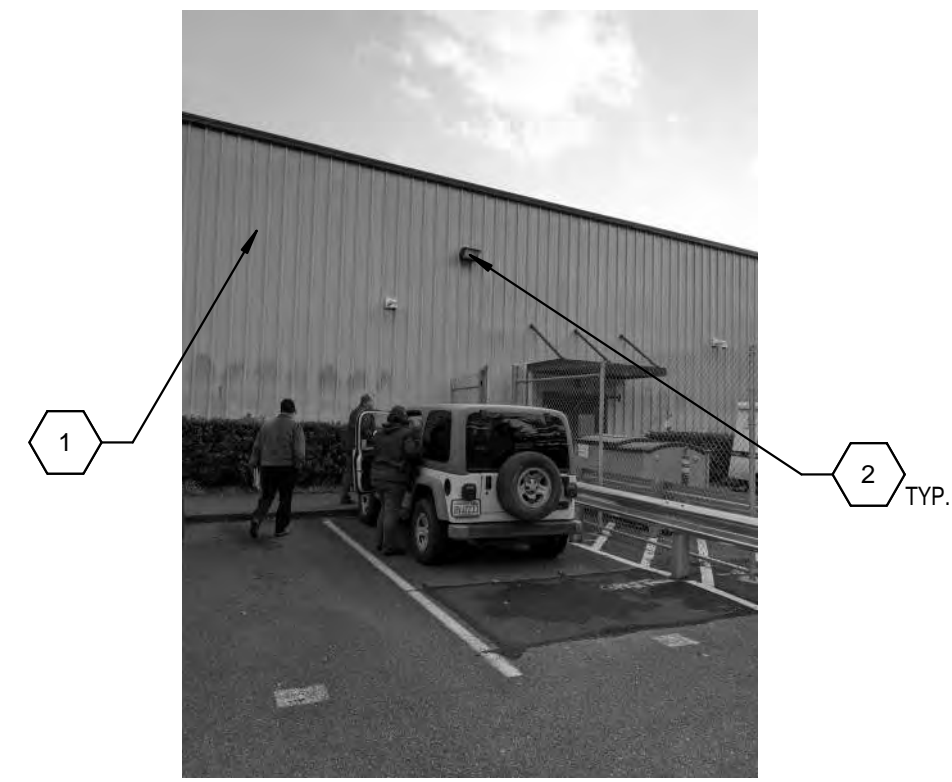

14 REFERENCE PHOTO

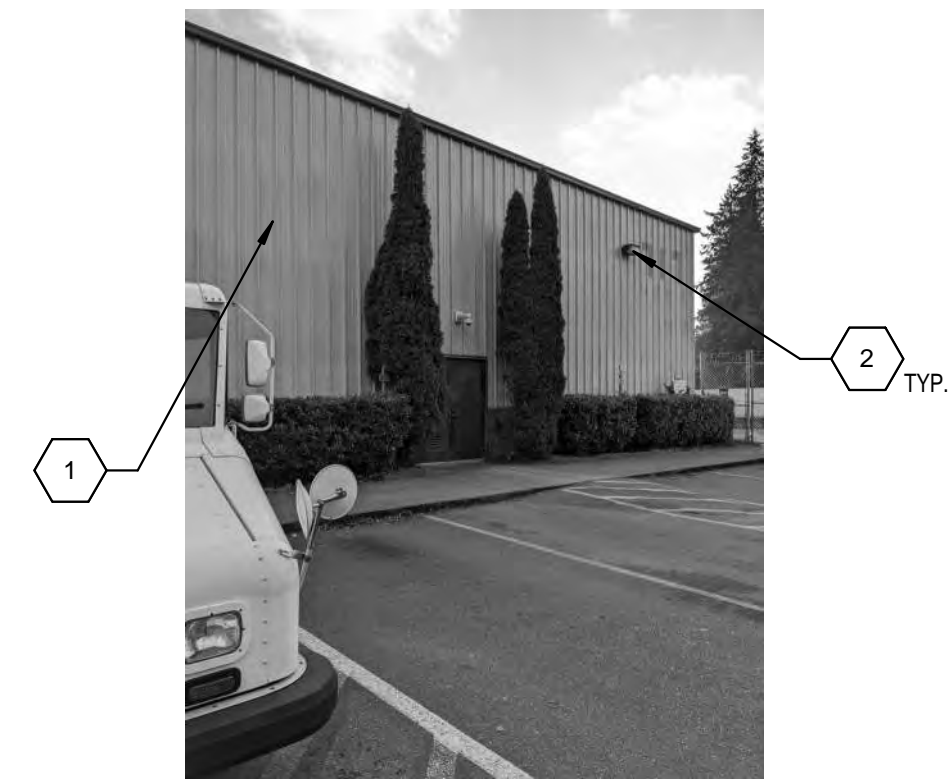

15 REFERENCE PHOTO



16 REFERENCE PHOTO




9 REFERENCE PHOTO



10 REFERENCE PHOTO



11 REFERENCE PHOTO

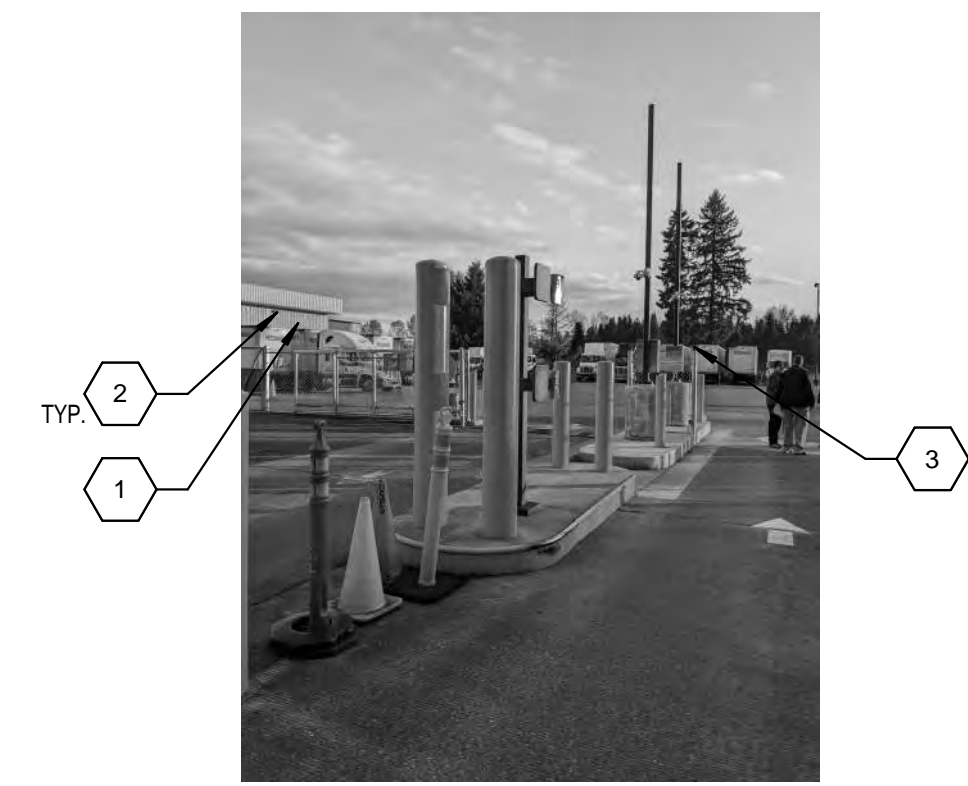

12 REFERENCE PHOTO



5 REFERENCE PHOTO




6 REFERENCE PHOTO



7 REFERENCE PHOTO




8 REFERENCE PHOTO

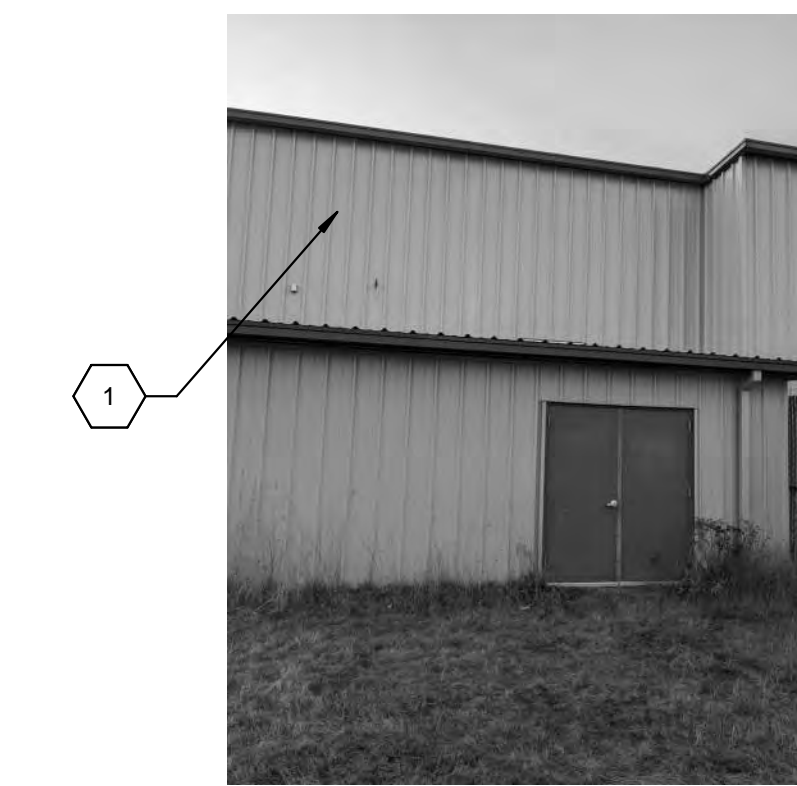


1 REFERENCE PHOTO



2 REFERENCE PHOTO

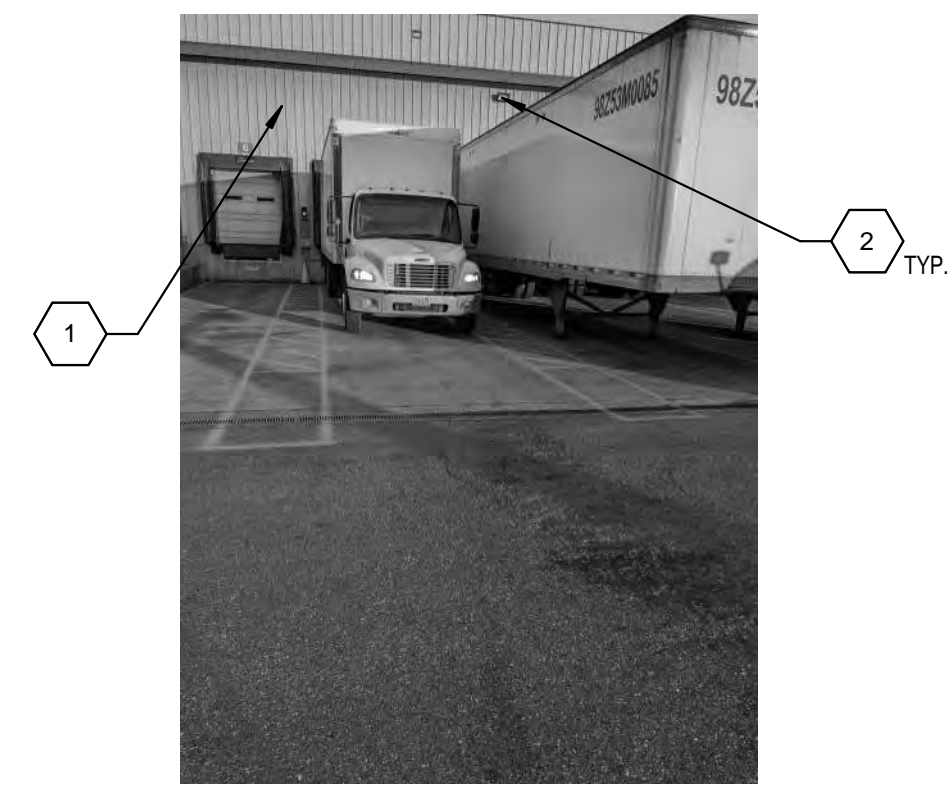

3 REFERENCE PHOTO

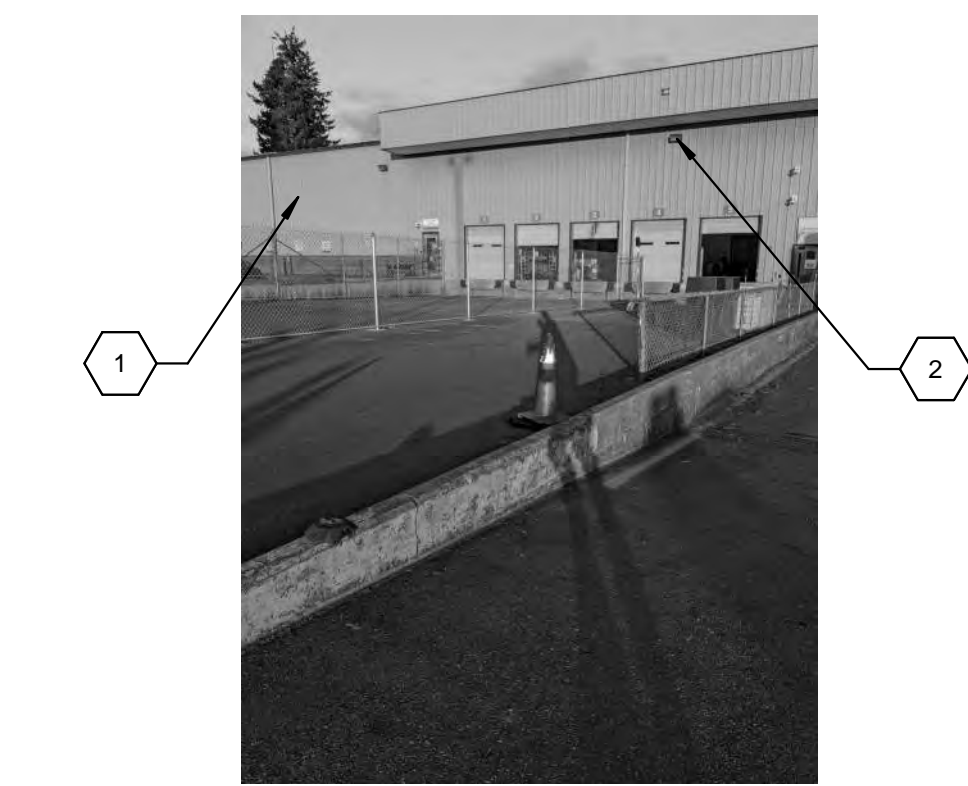

4 REFERENCE PHOTO

GENERAL NOTES


- A. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO FULLY AND COMPLETELY READ AND UNDERSTAND USPS STANDARD SPECIFICATIONS AND TO PROVIDE A FINISHED PROJECT, INCLUDING ALL PURCHASED ITEMS, FULLY CONFORMING TO THESE SPECIFICATIONS.
- B. BUILDING HAS BEEN FIELD MEASURED. HOWEVER, GC SHALL BE REQUIRED TO REVIEW SITE CONDITIONS AGAINST DRAWINGS. ANY DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE ANY WORK COMMENCES.
- C. DO NOT SCALE DRAWINGS.
- D. IT IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR TO CROSS-CHECK THE MEP DRAWINGS WITH THE ARCHITECTURAL DRAWINGS PRIOR TO THE ORDERING / INSTALLATION OF MECHANICAL, ELECTRICAL, AND PLUMBING WORK. ANY DISCREPANCIES BETWEEN THE ARCHITECTURAL AND MEP DRAWINGS SHALL BE BROUGHT TO THE ARCHITECTS ATTENTION FOR IMMEDIATE CLARIFICATION.
- E. COORDINATE WORK WITH OTHER TRADES. EQUIPMENT FURNISHED BY OTHERS, REQUIREMENTS OF THE TENANT AND LANDLORD/OWNER, AND THE CONSTRAINTS OF THE EXISTING CONDITIONS OF THE PROJECT SITE. COORDINATE THE INSTALLATION WITH OTHER TRADES AS REQUIRED TO ENSURE A NEAT AND ORDERLY INSTALLATION. NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES BEFORE STARTING WORK.
- F. GENERAL CONTRACTOR AND SUB-CONTRACTORS SHALL CAREFULLY REVIEW THE CONSTRUCTION DOCUMENTS. INFORMATION REGARDING THE COMPLETE WORK IS DISPERSED THROUGHOUT THE DOCUMENT SET AND CANNOT BE ACCURATELY DETERMINED WITHOUT REFERENCE TO THE COMPLETE DOCUMENT SET.
- G. WHERE THERE MAY BE A CONFLICT IN THE SPECIFICATIONS AND/OR DRAWINGS, THEN THE MORE EXPENSIVE LABOR, MATERIALS AND EQUIPMENT SHALL BE ASSUMED TO BE REQUIRED AND SHALL BE PROVIDED BY THE GENERAL CONTRACTOR TO THE SATISFACTION OF THE TENANT.
- H. WHEN WORK NOT SPECIFICALLY CALLED OUT IS REQUIRED TO COMPLETE THE PROJECT, IT SHALL BE PROVIDED BY THE GENERAL CONTRACTOR WITH THE BEST MATERIALS AND WORKMANSHIP.
- I. GC RESPONSIBLE FOR ENGAGING SHORING ENGINEERING FOR ALL BRACING REQUIRED FOR DEMOLITION AND CONSTRUCTION.

PLAN KEYNOTES

- 1. EXTERIOR BUILDING WORK TYPICAL ALL SIDES OF BUILDING:
  - PRESSURE WASH ALL EXTERIOR SURFACES.
  - PATCH, REPAIR, AND RE-TUCK POINT ANY MISSING MORTAR. COLOR AND STYLE TO MATCH EXISTING CONSTRUCTION.
  - REMOVE OLD SEALANT AND BACKER RODS, INCLUDING ALL WINDOWS AND DOORS. DO NOT CAULK OVER EXISTING WEEP HOLES. INSTALL NEW BACKER ROD AND SEALANT IN PLACE TO MATCH EXISTING COLOR. NOTE: POSSIBLE ACM AND LBP FOUND IN EXTERIOR CAULKING. SEE BOOK SPECS FOR ASBESTOS REPORT.
  - ALL PREVIOUSLY PAINTED METAL SURFACES TO BE SCRAPPED AND REPAINTED TO MATCH EXISTING PAINT COLOR. VERIFY COLOR IN FIELD. INCLUDED BUT NOT LIMITED TO PREVIOUSLY PAINTED BOLLARDS, GUARD RAILS, METAL DOORS AND FRAMED ETC.
- 2. UPDATE ALL NON-LED EXTERIOR LIGHT FIXTURES TO LED FIXTURES. ELECTRICAL TO RE-ESTABLISH POWER TO ANY DISCONNECTED LIGHTING FIXTURES. COORDINATE WITH ELECTRICAL DRAWINGS.
- 3. UPDATE ALL GATES LEADING TO LOADING DOCKS SO THAT THEY ARE OPERATIONAL.
- 4. REMOVE ALL EXISTING SATELLITE DISHES.

PROJECT MANAGER	OWNER	DC
DL		
JOB NO		2022359.19



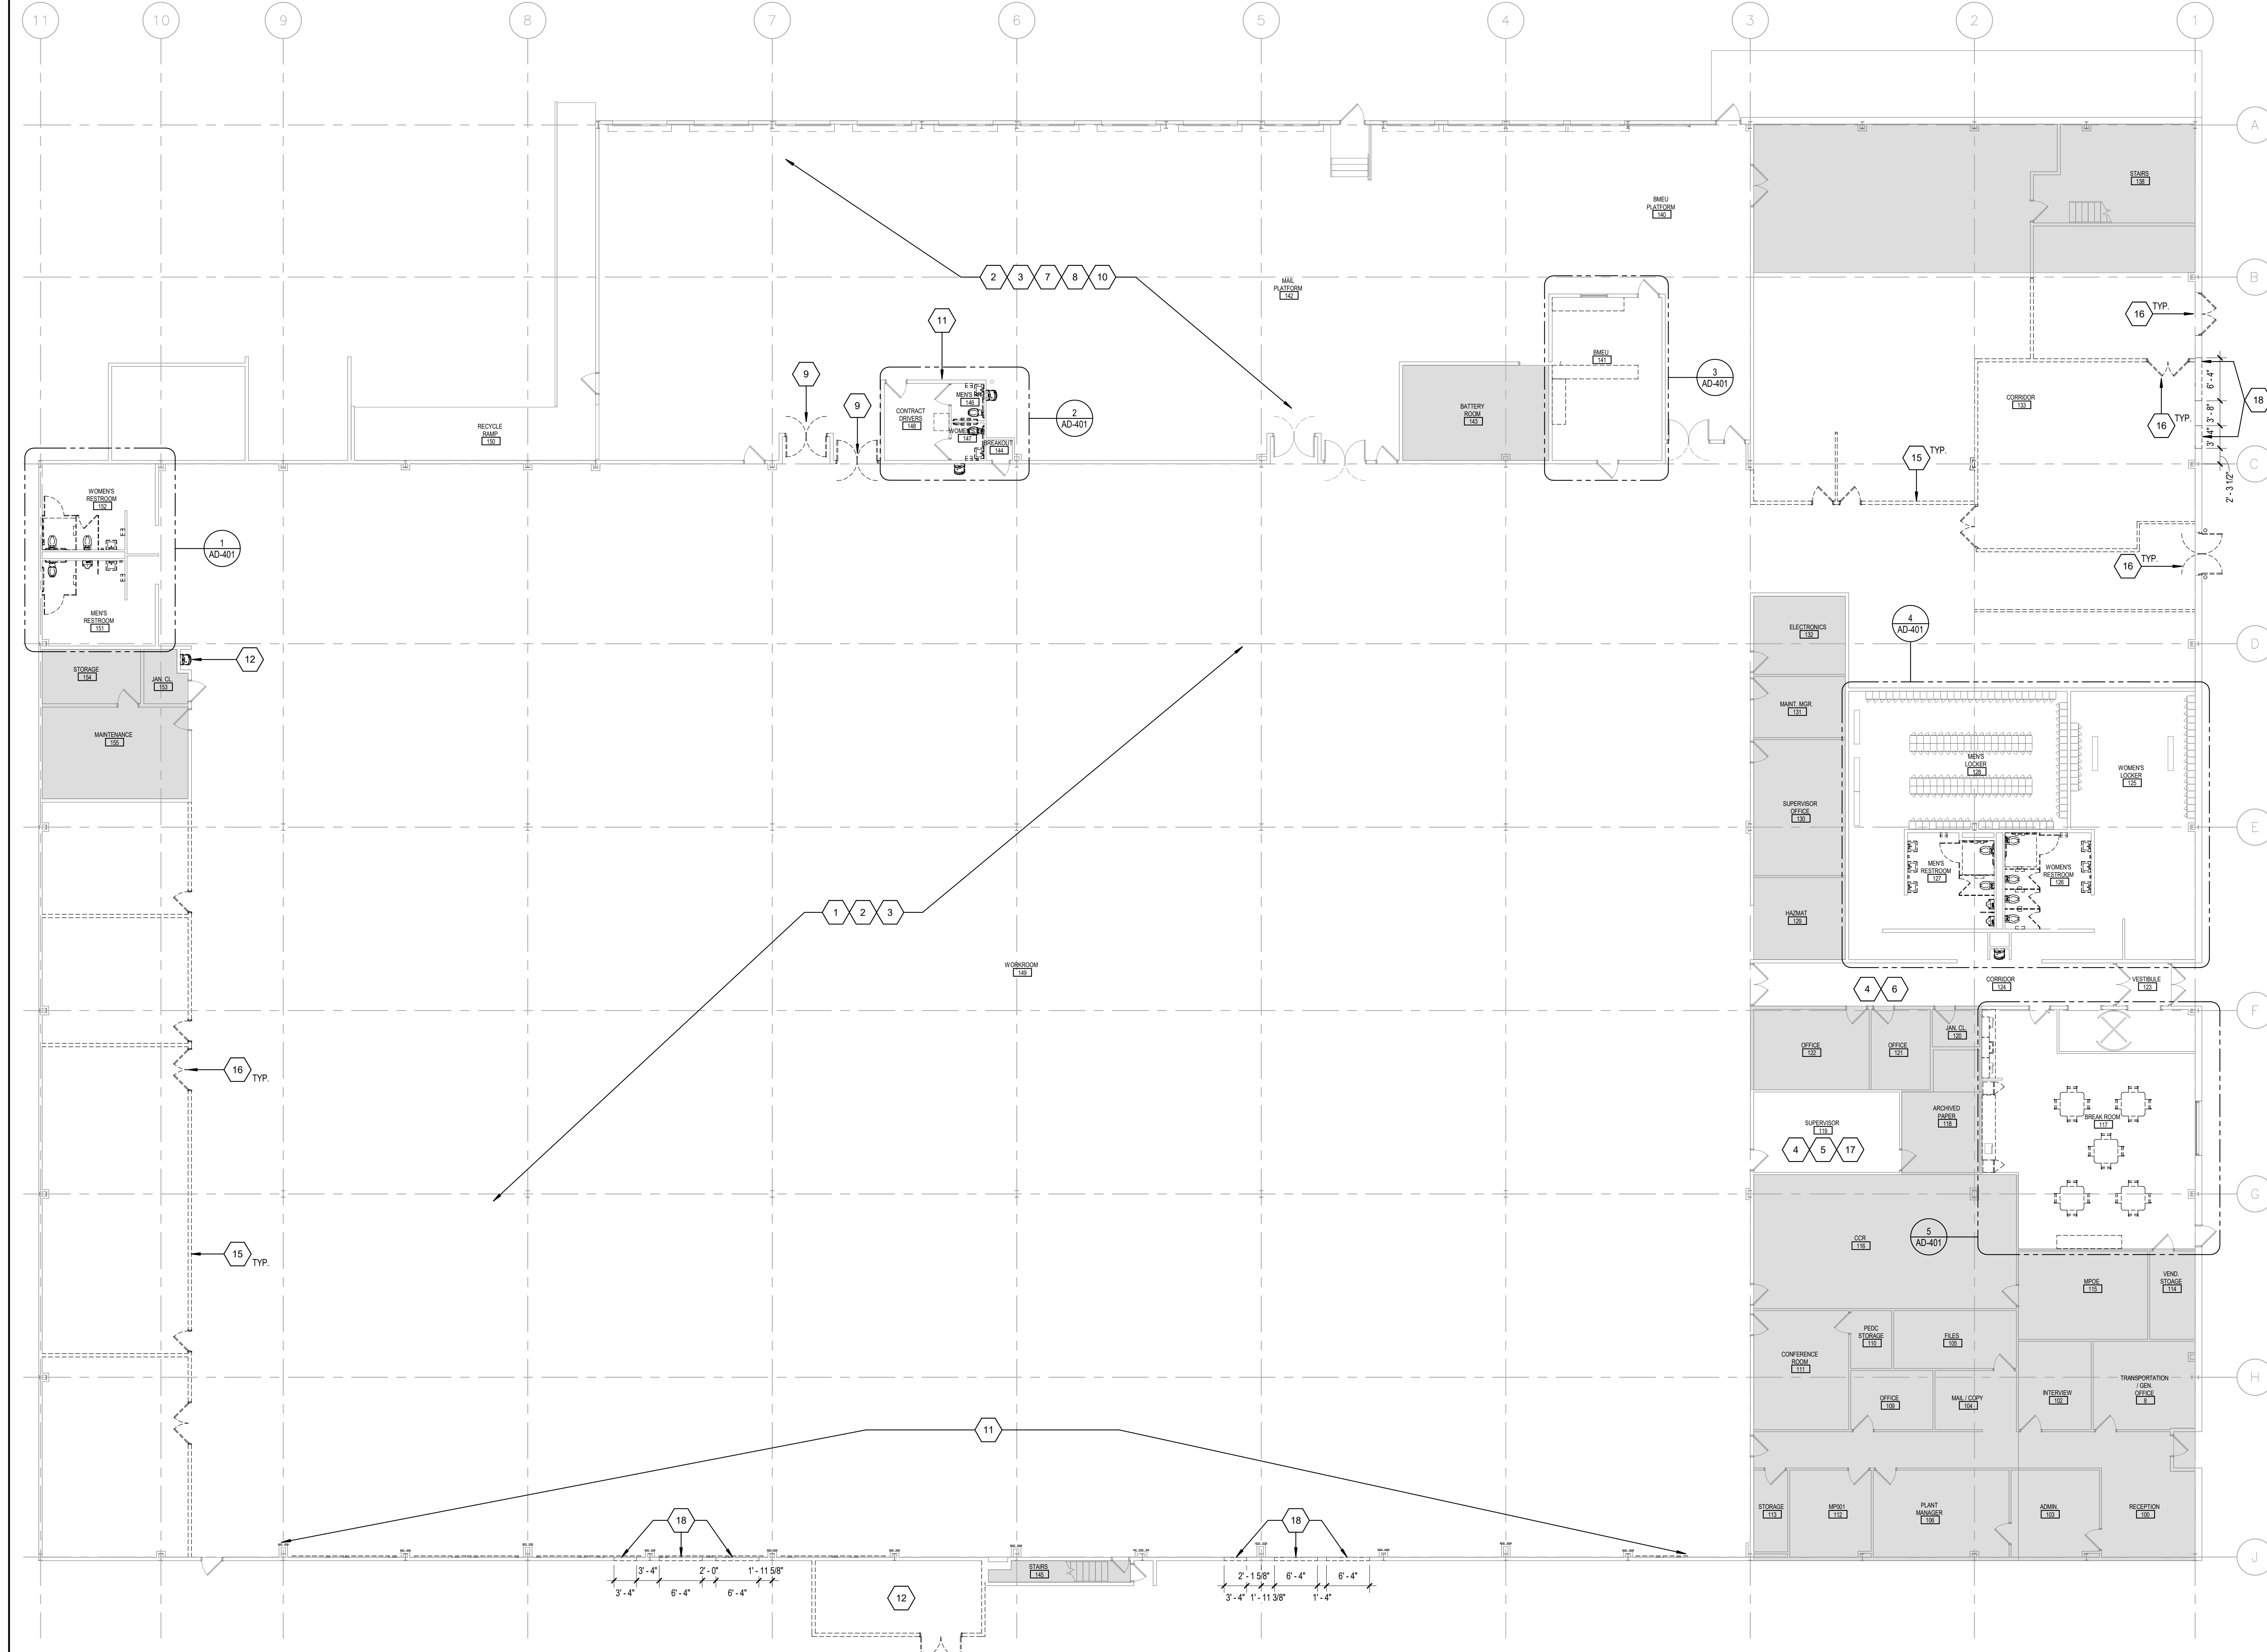

1 DEMOLITION FLOOR PLAN  
3/32" = 1'-0"

**CONTRACTOR RESPONSIBILITIES WITH REGARDS TO EXISTING CONDITIONS**

- A. THE CONTRACTOR SHALL PERFORM A SITE VISIT. IN DOING SO, THE CONTRACTOR HAS AGREED THAT THEY HAVE INVESTIGATED THE EXISTING CONDITIONS TO BE DEMOLISHED AND COMPARE THEM TO THE WORK SHOWN IN THE CONTRACT DOCUMENTS.
- B. THE CONTRACTOR SHALL FIELD VERIFY THE LOCATIONS AND EXTENT OF THE LIFE SAFETY SYSTEM AS THEY MAY BE AFFECTED BY THE NEW WORK. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING A TEMPORARY CONNECTION.
- C. THE AREAS ADJACENT TO THE PROJECT AREA ARE CURRENTLY OCCUPIED AND MUST REMAIN IN OPERATION DURING THE ASSIGNED BUSINESS HOURS. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER ANY CONSTRUCTION ACTIVITIES THAT MAY IMPEDE NORMAL OPERATIONS, INCLUDING ANY ACTIVITY THAT CREATES EXCESSIVE NOISE TO KEEP THE AREAS OUTSIDE OF THE CONSTRUCTION ZONE ACTIVE.

**CUTTING AND PATCHING GENERAL NOTES**

- A. THE CONTRACTOR SHALL REPLACE OR REPAIR ANY EXISTING TO REMAIN MATERIALS AND FINISHES WHICH ARE DAMAGED DURING ANY WORK PERFORMED UNDER THIS CONTRACT. THE CONTRACTOR SHALL PATCH, REPAIR AND ALIGN ALL EXISTING CONSTRUCTION SO AS TO LEAVE NO EVIDENCE OF PATCHING OR REPAIR.
- B. WHERE LEVEL CHANGES, HOLES, DEPRESSIONS OR FORMED TRENCHES ARE UNCOVERED IN EXISTING CONCRETE SLABS BY REMOVAL OF EXISTING CONDITIONS, THE CONTRACTOR SHALL PATCH/REPAIR AND LEVEL FLOOR WITH A LEVELING COMPOUND COMPLIANT WITH SPECIFIED FINISH FLOORING.
- C. WHERE ITEMS ARE TO BE REMOVED FROM EXISTING RATED WALLS, THE CONTRACTOR SHALL INFILL THE OPENING WITH MATERIALS THAT MATCH THE EXISTING CONSTRUCTION OR AN UL APPROVED MATERIAL TO MAINTAIN THE EXISTING FIRE RATED ASSEMBLY.

**DEMOLITION GENERAL NOTES**

- A. ALL EXISTING REMAINING EQUIPMENT TO BE PROPERLY AND COMPLETELY PROTECTED BEFORE ANY DEMOLITION, CLEANING OR NEW FINISHES APPLIED. COORDINATE WITH FACILITIES TO REVIEW AND APPROVE ALL PROTECTION BEFORE WORK COMMENCES.
- B. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER, WHICH DEMOLISHED ITEMS SHALL BE SALVAGED. SUCH ITEMS SHALL BE REMOVED WITH CARE, CLEANED, AND STORED IN A LOCATION AS DIRECTED BY THE OWNER.
- C. REMOVE MISCELLANEOUS WALL MOUNTED ACCESSORIES THROUGHOUT PROJECT AREA. COORDINATE WITH OWNER SALVAGING AND STORING WALL MOUNTED ITEMS FOR RE-MOUNTING.
- D. DEMOLITION IS INTENDED TO PREPARE THE BUILDING TO RECEIVE THE NEW WORK. THE INFORMATION PROVIDED IN NO WAY INTENDS TO MEAN THAT DEMOLITION IS LIMITED ONLY TO THOSE ITEMS SPECIFICALLY IDENTIFIED. THE CONTRACTOR SHALL REMOVE ALL EXISTING ITEMS OF CONSTRUCTION AND EQUIPMENT WITHIN THE PROJECT AREA.
- E. THE CONTRACTOR SHALL REMOVE ALL ITEMS TO BE DEMOLISHED IN THEIR ENTIRETY INCLUDING ALL ASSOCIATED PIPING, WIRING, HANGERS, SUPPORTS, ETC. FROM EXISTING SURFACES.
- F. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY IF ANY DEMOLITION WORK CANNOT BE PERFORMED DUE TO EXISTING FIELD CONDITIONS.
- G. ALL DEMO WORK SHOULD BE COMPLETED IN ITS ENTIRETY. ALL ADJACENT REMAINING TO BE PATCHED AND REPAIRED TO MATCH ADJACENT FINISHES, TO LOOK CLEAN AND CONSISTENT.

REMOVE EXISTING WALL CONSTRUCTION, SHOWN WITH DASHED LINES, IN ITS ENTIRETY FROM FLOOR TO STRUCTURE ABOVE INCLUDING DOORS, DOOR FRAMES, BORROWED LIGHTS, ASSOCIATED ELEC. / MECH. WORK, ETC. PREPARE AREA FOR NEW CONSTRUCTION.

**PHASING NOTE:**

- 1. CONTRACTOR SHALL ONLY RENOVATE A SINGLE RESTROOM AT A TIME, ONE MEN'S AND ONE WOMEN'S. ALL OTHER RESTROOM LOCATIONS AT THE SITE SHALL REMAIN IN SERVICE UNTIL RENOVATIONS OF THE RESTROOM OUT OF SERVICE ARE COMPLETE. GC TO PROVIDE MOBILE PORTABLE RESTROOM TRAILER FOR THE EXTENT OF THE PROJECT. GC TO COORDINATE WITH USPS FOR EXACT LOCATION, ENSURE QUANTITIES OF FIXTURE MEETS ALL REQUIREMENTS STATED ON G-001 LIFE SAFETY SHEET.

**PLAN KEYNOTES**


- 1. CLEAN EXISTING BLACKJACK FLOOR, PATCH AND PREP AREAS FOR RECOATING.
- 2. CLEAN EXCESS DUST AND DIRT FROM ALL ROOF STRUCTURE, PIPING, AND DUCTWORK ABOVE.
- 3. REMOVE EXISTING LIGHTING AND REPLACE WITH NEW LED LIGHTING. COORDINATE WITH ELECTRICAL.
- 4. REMOVE EXISTING CEILING GRID AND TILE COMPLETE. PATCH AND PREP AREA FOR NEW CEILING FINISH. SEE FINISH FLOOR PLAN FOR MORE INFORMATION. REMOVE EXISTING LIGHTING AND REPLACE WITH NEW LED LIGHTING. COORDINATE WITH ELECTRICAL.
- 5. EXISTING GYP. BD. CEILING TO REMAIN. REMOVE EXISTING LIGHTING AND REPLACE WITH NEW LED LIGHTING. COORDINATE WITH ELECTRICAL. CLEAN AND PREP SURFACE FOR NEW CEILING FINISH. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- 6. REMOVE ALL SURFACE MOUNTED ITEMS AND PREPARE ALL PREVIOUSLY PAINTED WALLS, DOORS, AND METAL RAILINGS AND BOLLARDS FOR NEW PAINT. REPAIR ANY DAMAGED DRYWALL AS REQUIRED.
- 7. CLEAN AND RESEAL EXISTING CONCRETE FLOOR.
- 8. REMOVE AND REPLACE DAMAGED WOODEN SUIPERS AND REFINISH ALL TO MATCH ADJACENT. EXISTING FRAME TO REMAIN. REMOVE EXISTING IMPACT DOOR AND HARDWARE COMPLETE. CLEAN AND PREP FRAME FOR NEW IMPACT DOOR AND HARDWARE INSTALLATION. SEE DOOR SCHEDULE FOR MORE INFORMATION.
- 9. SPONGE WASH EXISTING VINYL INSULATION WALLS.
- 10. REPAIR ANY DAMAGES TO EXISTING WALLS.
- 11. REMOVE EXISTING DRINKING FOUNTAIN. PATCH AND REPAIR WALLS FOR A NEW DRINKING FOUNTAIN WITH BOTTLE FILLER PROVIDED BY GC.
- 12. REMOVE ALL UNATTACHED (LOOSE) RAILS AND POSTS.
- 13. REMOVE EXISTING COMPRESSOR SHED IN ITS ENTIRETY, INCLUDING ANY ASSOCIATED FRAMING AND EQUIPMENT. COORDINATE DISPOSITION OF EQUIPMENT WITH USPS.
- 14. REMOVE STUD WALL FROM FLOOR TO CEILING. PATCH, REPAIR AND PAINT ALL NECESSARY FLOOR AND WALL FINISHES TO MATCH ADJACENT CONDITIONS.
- 15. REMOVE EXISTING DOOR, FRAME, AND HARDWARE COMPLETE.
- 16. EXISTING VCT TO REMAIN. REPLACE ALL DAMAGED/STAINED TILE. SEE FINISH FLOOR PLAN FOR MORE INFORMATION.
- 17. SAW-CUT AND REMOVE EXISTING PORTION OF CMU WALL FOR NEW DOOR AND FRAME INSTALLATION. SEE DOOR SCHEDULE FOR MORE INFORMATION. COORDINATE DEMOLITION WITH STRUCTURAL.

© Copyright 2006-2009, United States Postal Service

PRELIMINARY DRAFT  
NOT FOR CONSTRUCTION,  
BID, RELIANCE,  
RECORDING PURPOSES OR  
IMPLEMENTATION.

DESIGNER	DC
PROJECT MANAGER	DL
JOB NO. <b>2022359.19</b>	

USPS - OLYMPIA, WA - SDC  
717 76TH AVENUE SW  
TUMWATER, WA 98501

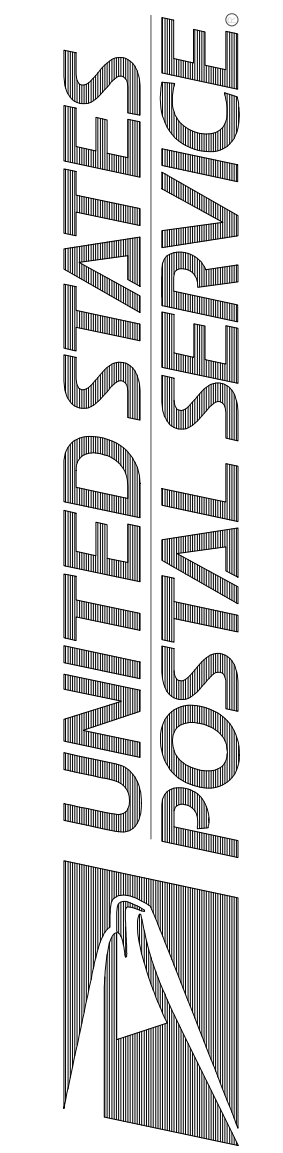

Facilities: 4301 Wilson Blvd., Suite 300, Arlington, VA 22203-1861

ENLARGED DEMOLITION PLANS

AD-401  
Scale: NTS  
Project: USPS - OLYMPIA, WA - SDC  
USPS File Number: 546148-030

Revisions: 100% OWNER REVIEW  
Date: 09/06/2023

**CONTRACTOR RESPONSIBILITIES WITH REGARDS TO EXISTING CONDITIONS**


- THE CONTRACTOR SHALL PERFORM A SITE VISIT. IN DOING SO, THE CONTRACTOR HAS AGREED THAT THEY HAVE INVESTIGATED THE EXISTING CONDITIONS TO BE DEMOLISHED AND COMPARE THEM TO THE WORK SHOWN IN THE CONTRACT DOCUMENTS.
- THE CONTRACTOR SHALL FIELD VERIFY THE LOCATIONS AND EXTENT OF THE LIFE SAFETY SYSTEM AS THEY MAY BE AFFECTED BY THE NEW WORK. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING A TEMPORARY CONNECTION.
- THE AREAS ADJACENT TO THE PROJECT AREA ARE CURRENTLY OCCUPIED AND MUST REMAIN IN OPERATION DURING THE ASSIGNED BUSINESS HOURS. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER ANY CONSTRUCTION ACTIVITIES THAT MAY IMPEDE NORMAL OPERATIONS, INCLUDING ANY ACTIVITY THAT CREATES EXCESSIVE NOISE TO KEEP THE AREAS OUTSIDE OF THE CONSTRUCTION ZONE ACTIVE.

**CUTTING AND PATCHING GENERAL NOTES**

- THE CONTRACTOR SHALL REPLACE OR REPAIR ANY EXISTING TO REMAIN MATERIALS AND FINISHES WHICH ARE DAMAGED DURING ANY WORK PERFORMED UNDER THIS CONTRACT. THE CONTRACTOR SHALL PATCH, REPAIR AND ALIGN ALL EXISTING CONSTRUCTION SO AS TO LEAVE NO EVIDENCE OF PATCHING OR REPAIR.
- WHERE LEVEL CHANGES, HOLES, DEPRESSIONS OR FORMED TRENCHES ARE UNCOVERED IN EXISTING CONCRETE SLABS BY REMOVAL OF EXISTING CONDITIONS, THE CONTRACTOR SHALL PATCH/REPAIR AND LEVEL FLOOR WITH A LEVELING COMPOUND COMPLIANT WITH SPECIFIED FINISH FLOORING.
- WHERE ITEMS ARE TO BE REMOVED FROM EXISTING RATED WALLS, THE CONTRACTOR SHALL INFILL THE OPENING WITH MATERIALS THAT MATCH THE EXISTING CONSTRUCTION OR AN UL APPROVED MATERIAL TO MAINTAIN THE EXISTING FIRE RATED ASSEMBLY.

**DEMOLITION GENERAL NOTES**

- ALL EXISTING REMAINING EQUIPMENT TO BE PROPERLY AND COMPLETELY PROTECTED BEFORE ANY DEMOLITION, CLEANING OR NEW FINISHES APPLIED. COORDINATE WITH FACILITIES TO REVIEW AND APPROVE ALL PROTECTION BEFORE WORK COMMENCES.
- THE CONTRACTOR SHALL COORDINATE WITH THE OWNER, WHICH DEMOLISHED ITEMS SHALL BE SALVAGED. SUCH ITEMS SHALL BE REMOVED WITH CARE, CLEANED, AND STORED IN A LOCATION AS DIRECTED BY THE OWNER.
- REMOVE MISCELLANEOUS WALL MOUNTED ACCESSORIES THROUGHOUT PROJECT AREA. COORDINATE WITH OWNER SALVAGING AND STORING WALL MOUNTED ITEMS FOR RE-MOUNTING.
- DEMOLITION IS INTENDED TO PREPARE THE BUILDING TO RECEIVE THE NEW WORK. THE INFORMATION PROVIDED IN NO WAY INTENDS TO MEAN THAT DEMOLITION IS LIMITED ONLY TO THOSE ITEMS SPECIFICALLY IDENTIFIED. THE CONTRACTOR SHALL REMOVE ALL EXISTING ITEMS OF CONSTRUCTION AND EQUIPMENT WITHIN THE PROJECT AREA.
- THE CONTRACTOR SHALL REMOVE ALL ITEMS TO BE DEMOLISHED IN THEIR ENTIRETY INCLUDING ALL ASSOCIATED PIPING, WIRING, HANGERS, SUPPORTS, ETC. FROM EXISTING SURFACES.
- THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY IF ANY DEMOLITION WORK CANNOT BE PERFORMED DUE TO EXISTING FIELD CONDITIONS.
- ALL DEMO WORK SHOULD BE COMPLETED IN ITS ENTIRETY. ALL ADJACENT REMAINING TO BE PATCHED AND REPAIRED TO MATCH ADJACENT FINISHES, TO LOOK CLEAN AND CONSISTENT.



REMOVE EXISTING WALL CONSTRUCTION, SHOWN WITH DASHED LINES, IN ITS ENTIRETY FROM FLOOR TO STRUCTURE ABOVE INCLUDING DOORS, DOOR FRAMES, BORROWED LIGHTS, ASSOCIATED ELEC. / MECH. WORK, ETC. PREPARE AREA FOR NEW CONSTRUCTION.



**PHASING NOTE:**

- CONTRACTOR SHALL ONLY RENOVATE A SINGLE RESTROOM AT A TIME, ONE MENS AND ONE WOMENS. ALL OTHER RESTROOM LOCATIONS AT THE SITE SHALL REMAIN IN SERVICE UNTIL RENOVATIONS OF THE RESTROOM OUT OF SERVICE ARE COMPLETE. GC TO PROVIDE MOBILE PORTABLE RESTROOM TRAILER FOR THE EXTENT OF THE PROJECT. GC TO COORDINATE WITH USPS FOR EXACT LOCATION, ENSURE QUANTITIES OF FIXTURE MEETS ALL REQUIREMENTS STATED ON G-001 LIFE SAFETY SHEET.

**PLAN KEYNOTES**


- REMOVE EXISTING FLOOR, WALL BASE, AND ALL ADHESIVES BACK TO SUBSURFACE. CLEAN AND PREPARE AREA FOR NEW FLOOR INSTALLATION. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
- REMOVE EXISTING CEILING GRID AND TILE COMPLETE. PATCH AND PREP AREA FOR NEW CEILING FINISH. SEE FINISH FLOOR PLAN FOR MORE INFORMATION. REMOVE EXISTING LIGHTING AND REPLACE WITH NEW LED LIGHTING. COORDINATE WITH ELECTRICAL.
- EXISTING GYPSUM BOARD CEILING TO REMAIN. REMOVE EXISTING LIGHTING AND REPLACE WITH NEW LED LIGHTING. COORDINATE WITH ELECTRICAL DRAWINGS. CLEAN AND PREPARE SURFACE FOR NEW CEILING FINISH. SEE FINISH FLOOR PLAN FOR ADDITIONAL INFORMATION.
- REMOVE ALL SURFACE MOUNTED ITEMS AND PREPARE ALL PREVIOUSLY PAINTED WALLS, DOORS, METAL RAILINGS, AND SKILLARDS FOR NEW PAINT. REPAIR ANY DAMAGED DRYWALL AS REQUIRED.
- REMOVE ALL EXISTING TABLES AND CHAIRS LOCATED IN EMPLOYEE BREAK ROOMS. REMOVE ALL BREAKROOM TACKBOARDS AND BULLETIN BOARDS TO BE CLEANED AND REINSTALLED IN EXISTING LOCATION. COORDINATE EQUIPMENT RELOCATION WITH USPS.
- REMOVE EXISTING CABINETS, COUNTERTOP, AND SINK. PATCH, PAINT, AND REPAIR AREA FOR NEW CASEWORK. COORDINATE SINK REMOVAL WITH PLUMBING DRAWINGS.
- EXISTING SPECIALTY EQUIPMENT (REFRIGERATOR) TO BE REMOVED AND TURNED OVER TO USPS. COORDINATE REMOVAL OF ALL SPECIALTY EQUIPMENT WITH USPS.
- REMOVE ALL PLUMBING FIXTURES, PARTITIONS, AND RESTROOM ACCESSORIES TO BE REPLACED ONE-FOR-ONE WITH NEW. PATCH AND REPAIR ALL TO MATCH EXISTING.
- REMOVE EXISTING DRINKING FOUNTAIN. PATCH AND REPAIR WALLS FOR A NEW DRINKING FOUNTAIN WITH BOTTLE FILLER PROVIDED BY GC.
- EXISTING LOCKERS AND BENCHES TO BE REMOVED, CLEANED AND REINSTALLED WITHIN THE SAME ROOM. CLEAN ALL STICKERS AND RESIDUE OFF OF LOCKERS BEFORE REINSTALLATION. COORDINATE LOCKER RELOCATION WITH ARCHITECT. SEE 441 A-402 FOR ADDITIONAL INFORMATION.
- REMOVE EXISTING PHONE BOOTH.
- REMOVE ALL SURFACE MOUNTED ITEMS AND PREP ALL PREVIOUSLY PAINTED WALLS, DOORS, AND METAL RAILINGS AND BOLLARDS FOR NEW PAINT. REPAIR ANY DAMAGED DRYWALL AS REQUIRED.
- REMOVE ALL PLUMBING FIXTURES, PARTITIONS, AND RESTROOM ACCESSORIES TO BE REPLACED WITH NEW TO BE INSTALLED TO MEET ACCESSIBILITY STANDARDS. GC RESPONSIBLE FOR ANY DEMO RELATED TO NEW PLUMBING LOCATIONS NOTED ON CONSTRUCTION PLAN. ALL RECESSED RESTROOM ACCESSORIES TO BE REMOVED. PATCH AND REPAIR ALL TO MATCH EXISTING.
- REMOVE EXISTING CASEWORK AND OFFICE FURNITURE. PATCH, PAINT, AND REPAIR AREA FOR NEW CASEWORK.
- EXISTING MICROWAVE TO REMAIN.

**KEY PLAN**

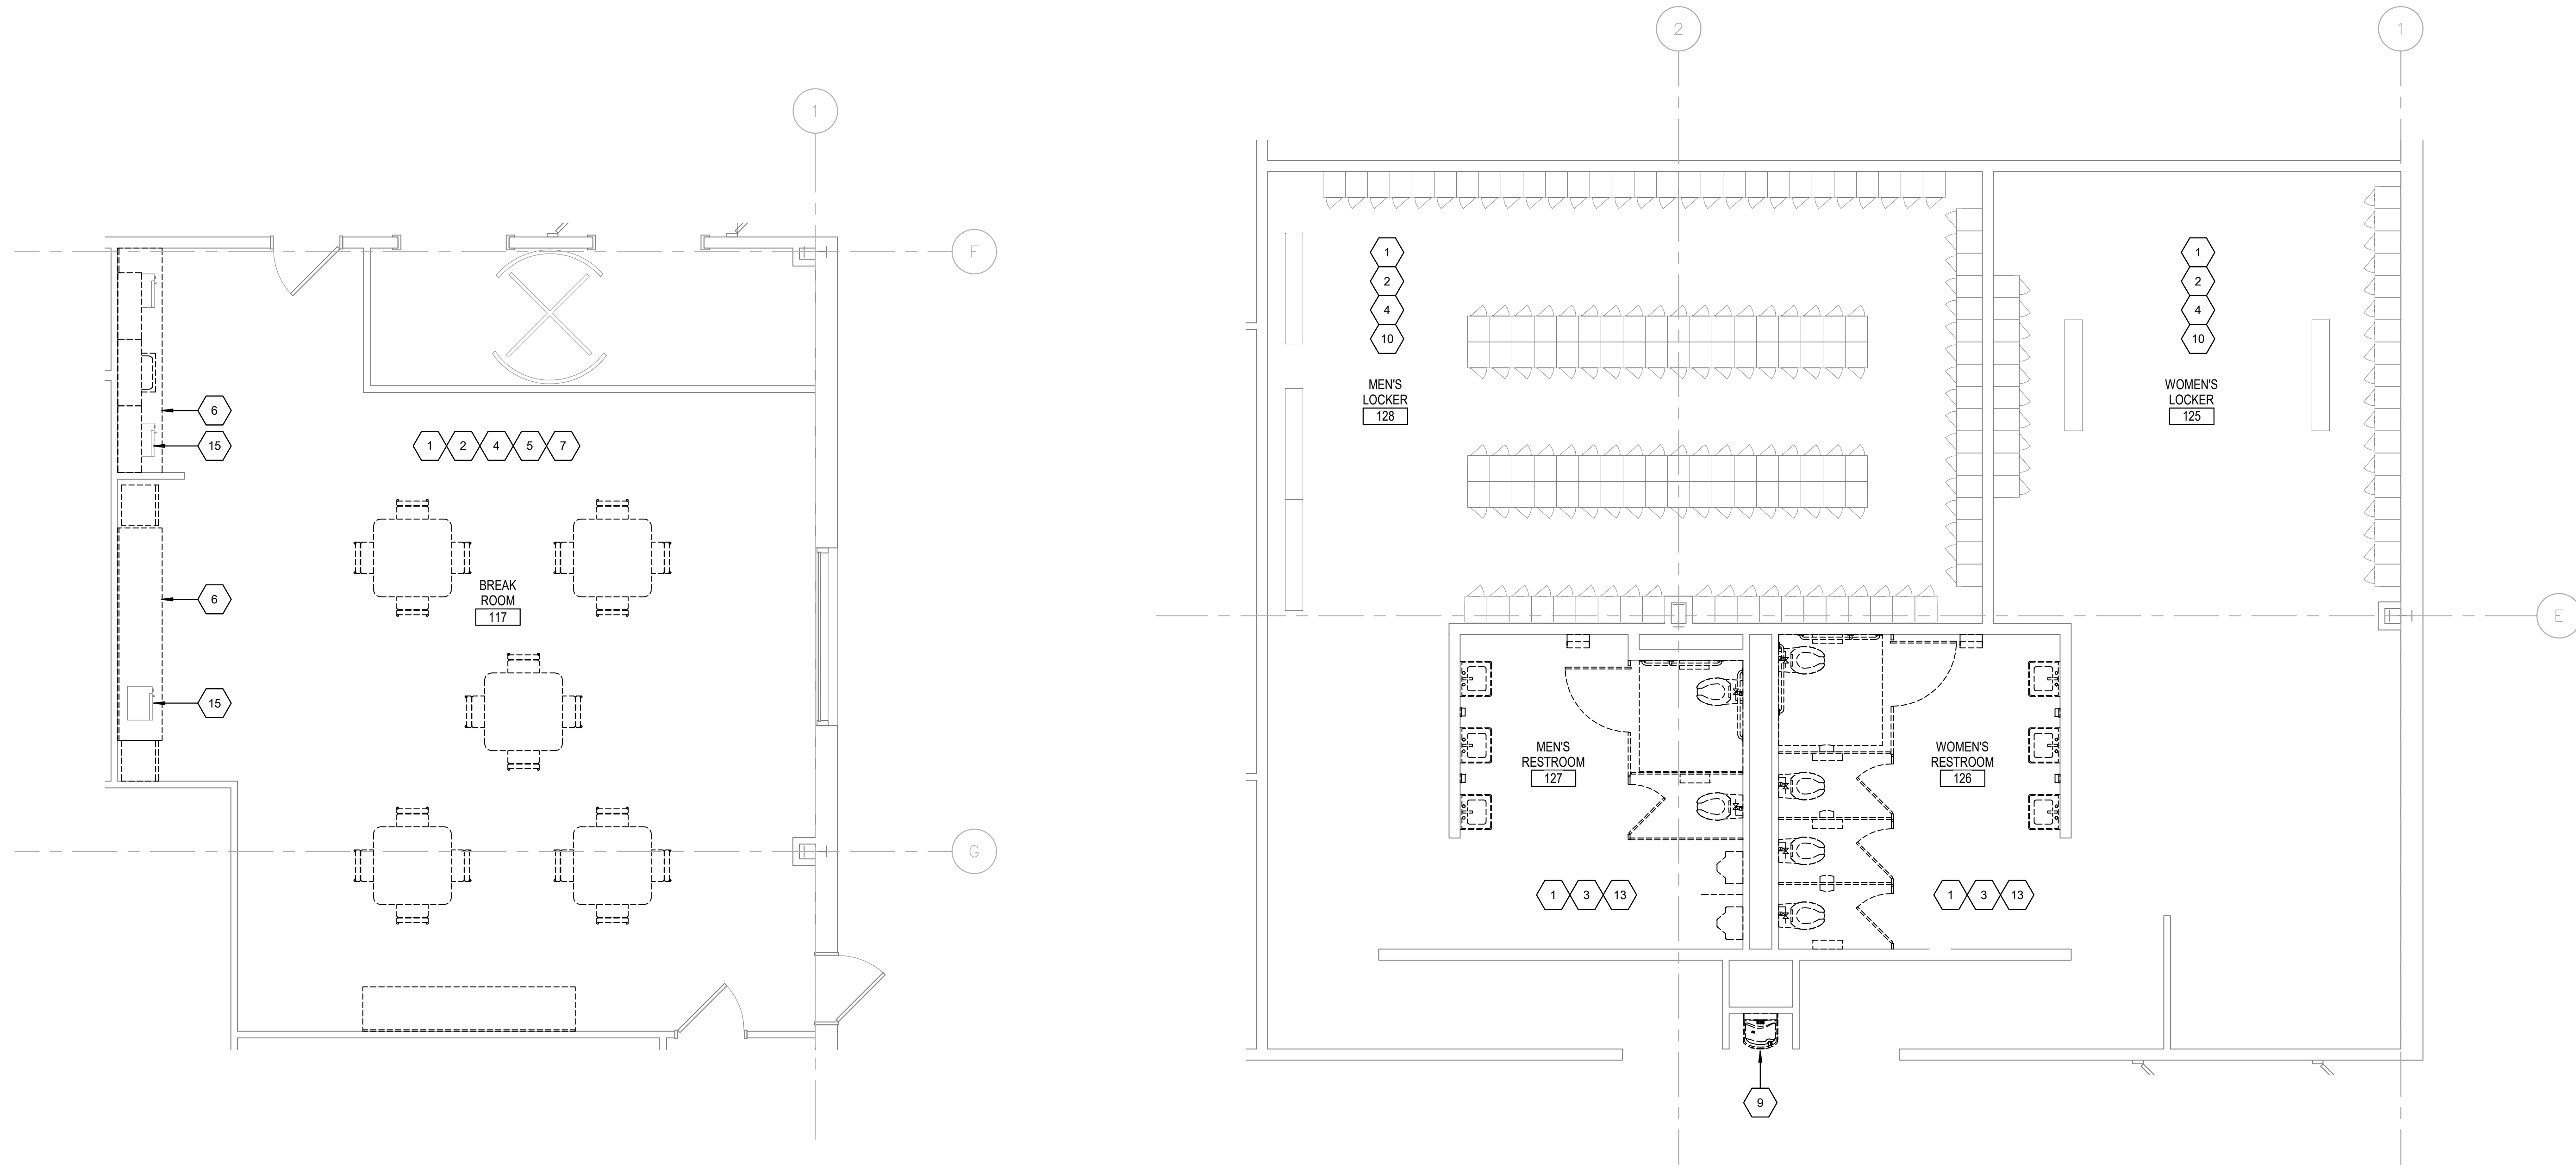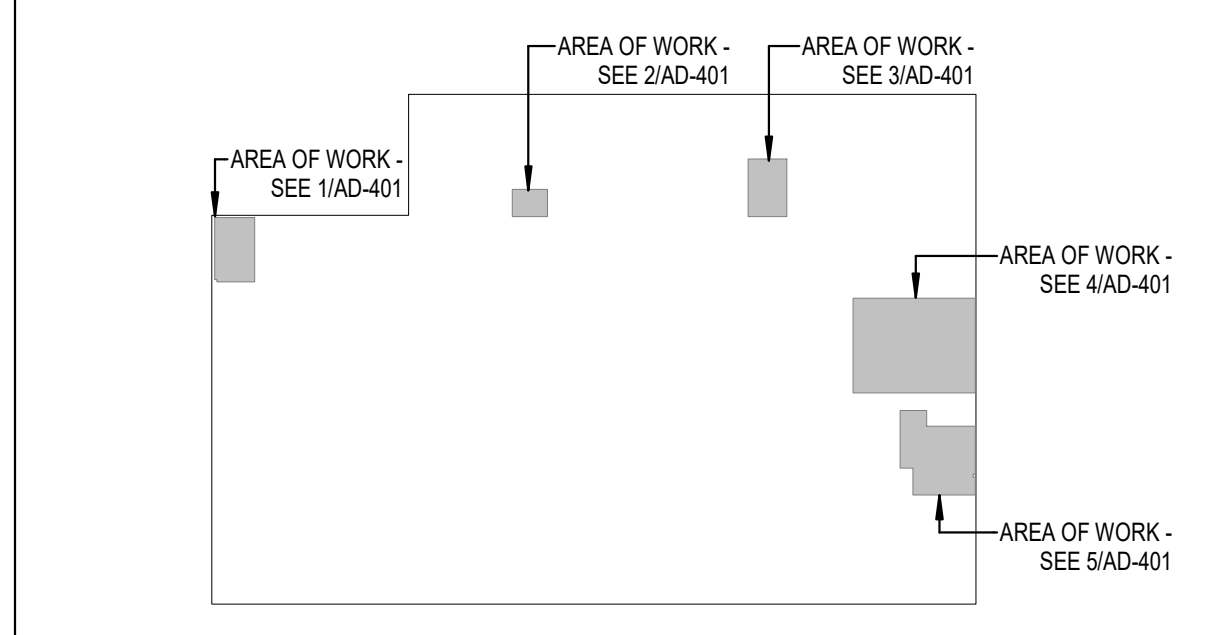


5 ENLARGED DEMOLITION PLAN  
1/4" = 1'-0"


4 ENLARGED DEMOLITION PLAN  
1/4" = 1'-0"

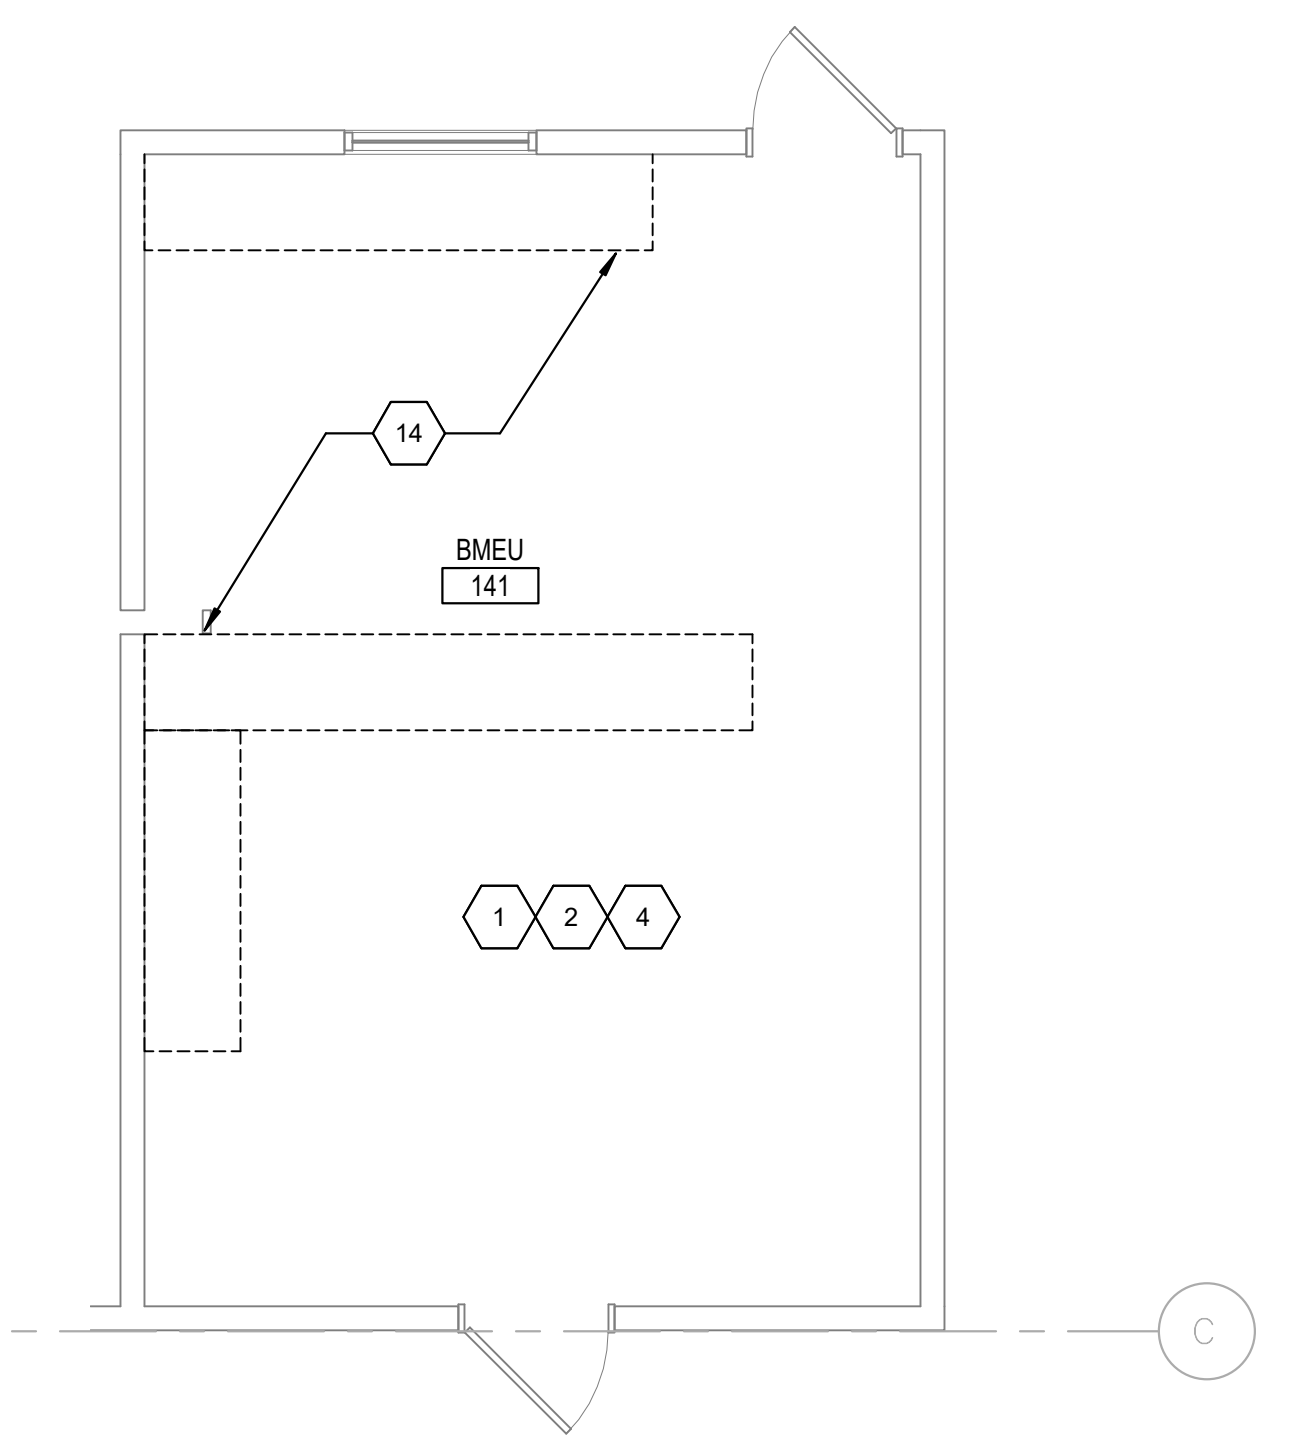

3 ENLARGED DEMOLITION PLAN  
1/4" = 1'-0"

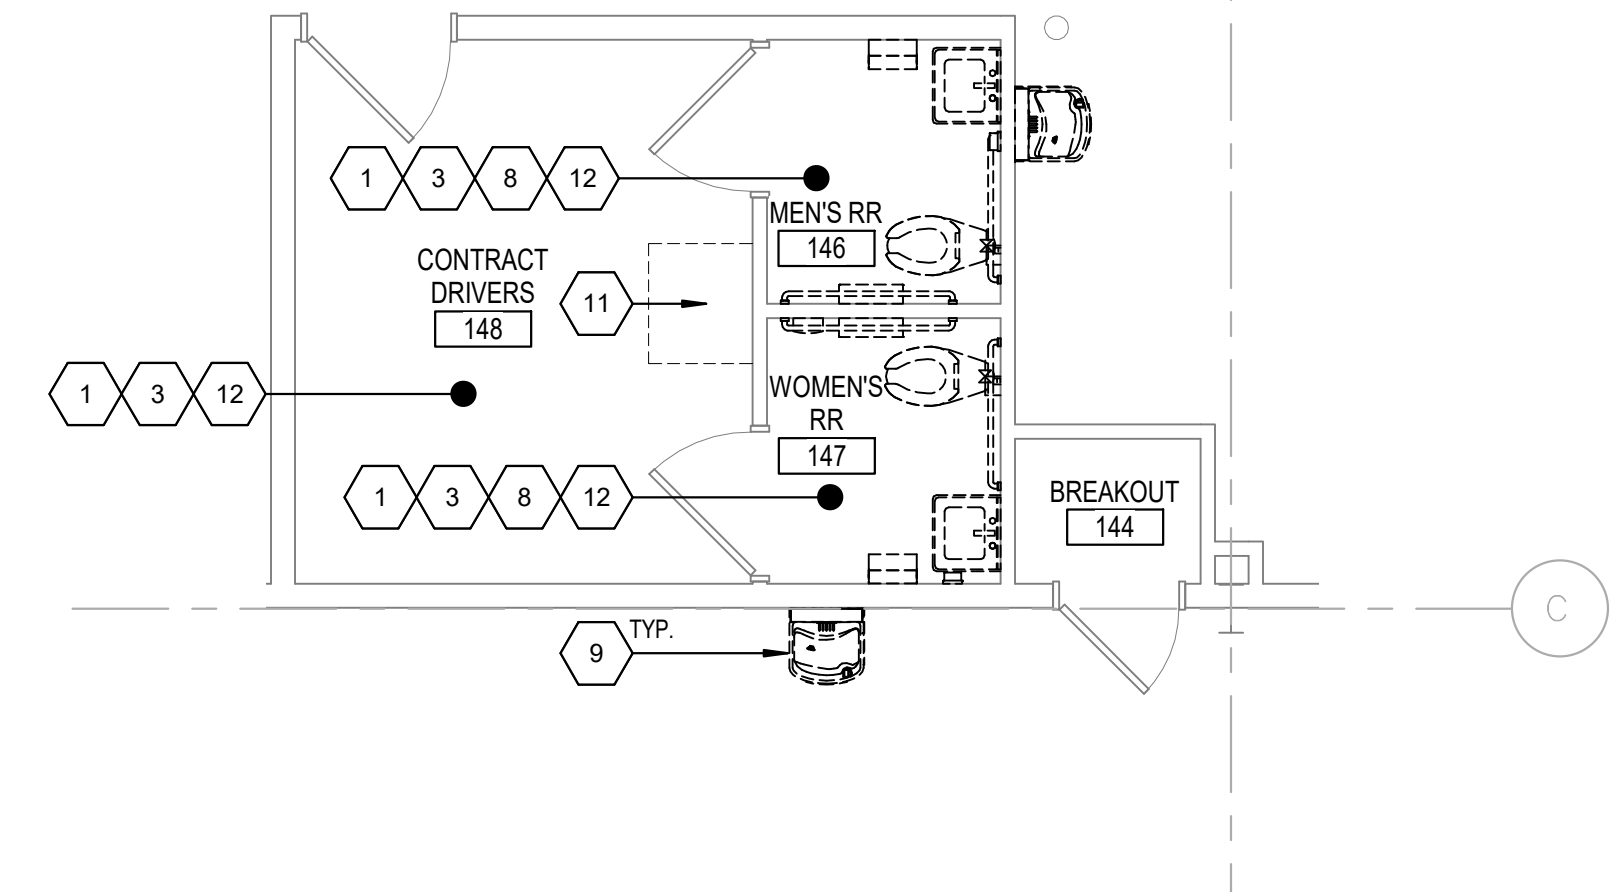

2 ENLARGED DEMOLITION PLAN  
1/4" = 1'-0"

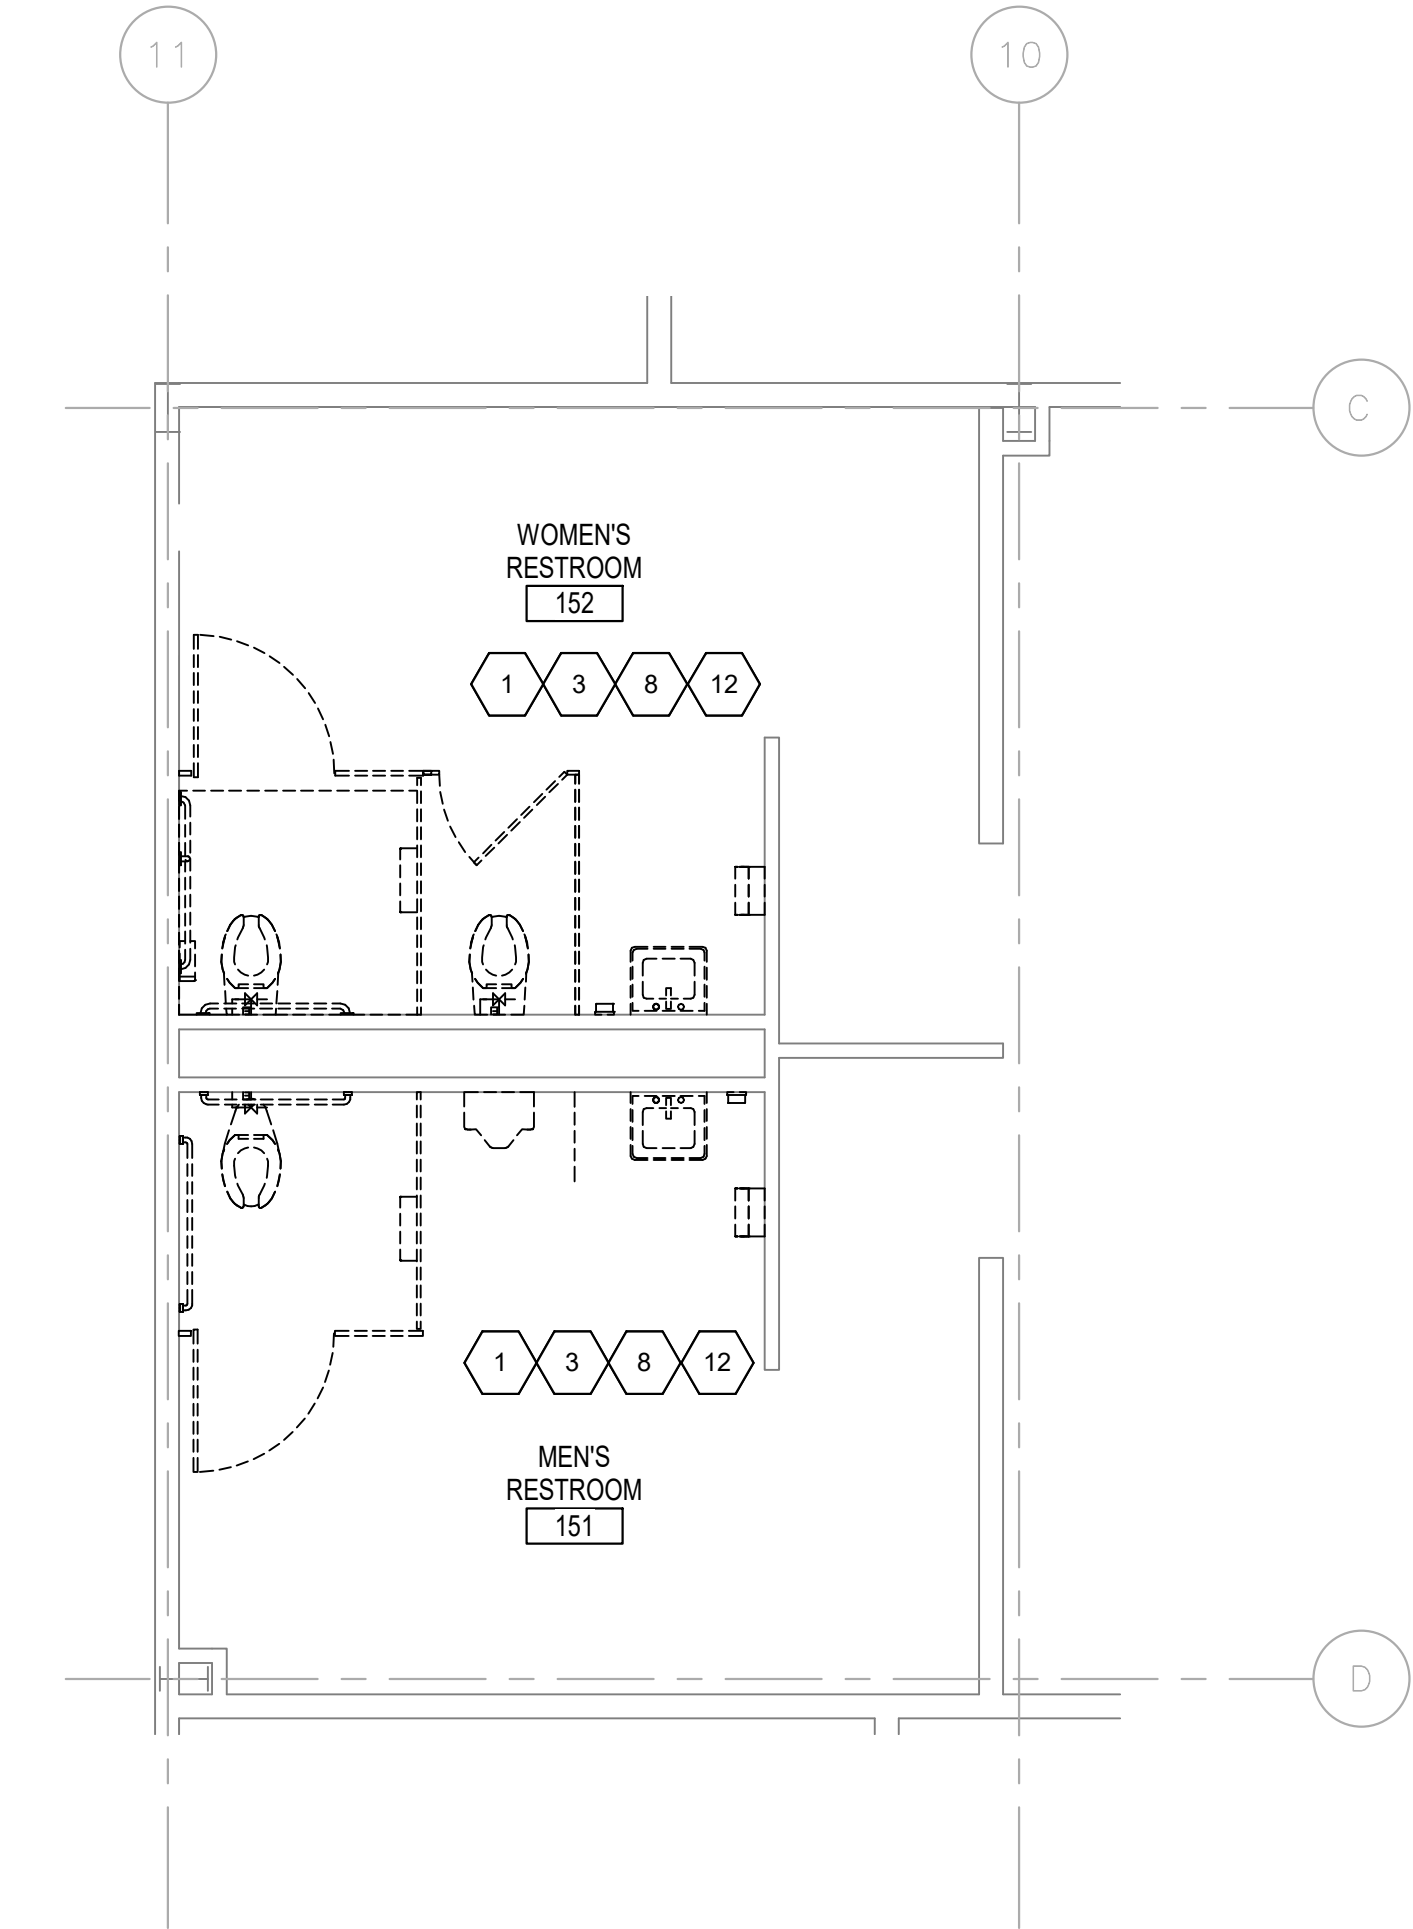

1 ENLARGED DEMOLITION PLAN  
1/4" = 1'-0"