

ABBREVIATIONS

| | | | | | | | |
|------------|--|-----------|---|----------|--------------------------------------|--------|-------------------------|
| A | ACOUSTIC CEILING TILE | FBGL | FIBERGLASS | P.S.F. | POUNDS PER SQUARE FOOT | V | VINYL |
| A.C.T. | AREA DRAIN | FIN. | FINISH | P.S.I. | POUNDS PER SQUARE INCH | V. | VINYL |
| A.D. | ABOVE FINISH FLOOR | FIN. FLR. | FINISH FLOOR | P.T.D. | PAPER TOWEL DISPENSER | V.B. | VINYL BASE |
| A.F.F. | ACQUISTICAL WALL PANEL | FL. | FLOW LINE | P.T.R. | PAPER TOWEL RECEPTACLE | V.C.T. | VINYL COMPOSITION TILE |
| A.W.P. | ACCESS DOOR | FLASH. | FLASHING | P.V.C. | POLYVINYLCHLORIDE | V.S.R. | VINYL STAIR RISERS |
| AC. DR. | ACCESS PANEL | FLR. | FLOOR | P.W.T. | PORCELAIN WALL TILE | V.S.T. | VINYL STAIR TREADS |
| AC. PL. | ACCESS PANEL | FLUOR. | FLUORESCENT | PART. | PARTIAL | V.T. | VINYL TILE |
| ACCESS. | ACCESSIBLE | FND. | FOUNDATION | PARTN. | PARTITION | V.T.S. | VINYL TRANSITION STRIPS |
| ADJ. | ADJUSTABLE | FR. | FRAME | PC. | PIECE | VERT. | VERTICAL |
| AGG. | AGGREGATE | FRT. | FIRE RETARDANT | PERIM. | PERIMETER | VEST. | VESTIBULE |
| ALT. | ALTERNATE or ALTERNATIVE | FT. | FEET or FOOT | PL. | PLATE or PROPERTY LINE | W | WIDE or WIDTH |
| ALUM. | ALUMINUM | FTG. | FOOTING | PLAS. | PLASTER | W. | WIDE or WIDTH |
| ANOD. | ANODIZED | FUR. | FURRING | PLBG. | PLUMBING | W.B. | WHITE BOARD |
| APPROX. | APPROXIMATE(LY) | G | | PLYWD. | PLYWOOD | W.C. | WATER CLOSET |
| ARCH. | ARCHITECTURAL or ARCHITECT | G.B. | GRAB BAR | PNL. | PANEL | W.F. | WOOD FLOORING |
| ASPH. | ASPHALT | G.C. | GENERAL CONTRACTOR | PO.T. | PORCELAIN TILE | W.GL. | WIRE GLASS |
| ATTN. | ATTENTION | G.D. | GRID | POL. | POLISHED | W.H. | WATER HEATER |
| B | | G.M.B. | GLASS MARKER BOARD | PORT. | PORTABLE | W.P. | WORKING POINT |
| B.F.F. | BELOW FINISH FLOOR | G.O. | GLASS OPENING | PR. | PAIR | W.T. | WINDOW TREATMENT |
| B.O. | BOTTOM OF | GA. | GAUGE | PRCST. | PRECAST | W.W.F. | WELDED WIRE FABRIC |
| B.O.C. | BOTTOM OF CONCRETE or CURB | GAL. | GALLON | PREFAB. | PREFABRICATED | W/ | WITH |
| B.O.F. | BOTTOM OF FOOTING | GALV. | GALVANIZED | PREFIN. | PREFINISHED | W/O | WITHOUT |
| B.U.R. | BUILT UP ROOFING | GL. | GLASS | PROP. | PROPERTY | WD. | WOOD |
| BD. | BOARD | GND. | GROUND | PT. | PAINT or PAINTED | WD.B. | WOOD BASE |
| BL | BUILDING LINE | GR. | GRADE | PT.E. | EPOXY PAINT | WIN. | WINDOW |
| BLDG. | BUILDING | GT. | GROUT | Q | | WSCOT. | WAINSCOT |
| BLK. | BLOCK | GYP.BD. | GYPSUM BOARD | Q.T. | QUARRY TILE | WT. | WEIGHT |
| BLKG. | BLOCKING | H | | Q.T.B. | QUARRY TILE BASE | Y | |
| BM | BEAM | H. | HIGH | Q.T.R. | QUARTER | Y.D. | YARD DRAIN |
| BOTT. | BOTTOM | H.B. | HOSE BIBB | QZ. | QUARTZ SURFACE | Y.H. | YARD HYDRANT |
| BR. | BRICK | H.C. | HOLLOW CORE | R | | YD. | YARD |
| BRG. | BEARING | H.M. | HOLLOW METAL | R. | RISER | | |
| C | | H.P. | HIGH POINT | R.A. | RETURN AIR | | |
| C.B. | CATCH BASIN | H.V.A.C. | HEATING, VENTILATING AND AIR CONDITIONING | R.B. | RUBBER BASE | | |
| C.F. | CUBIC FEET | HD. | HEAD | R.C.P. | REINFORCED CONCRETE PIPE | | |
| C.G. | CORNER GUARD | HDCP. | HANDICAP | R.D. | ROOF DRAIN | | |
| C.J. | CONTROL JOINT | HDW. | HARDWARE | R.F. | RUBBER FLOORING | | |
| C.M.P. | CORRUGATED METAL PIPE | HWWD. | HARDWOOD | R.O. | ROUGH OPENING | | |
| C.M.U. | CONCRETE MASONRY UNIT | HN.R. | HANDRAIL | R.R. | RESTROOM | | |
| C.O. | CLEAN OUT | HORIZ. | HORIZONTAL | R.T. | RESILIENT TILE | | |
| C.T. | CERAMIC TILE | HR. | HOUR | RAD. | RADIUS | | |
| C.T.B. | CERAMIC TILE BASE | HT. | HEIGHT | RB.S.T. | RUBBER STAIR TREAD | | |
| C.Y. | CUBIC YARD | I | | RB.T. | RUBBER TILE | | |
| CAB.(S) | CABINET(S) | I.D. | INSIDE DIAMETER | RE. | REFER TO | | |
| CEM. | CEMENT | IN. | INCH | REF. | REFERENCE | | |
| CFCI | CONTRACTOR FINISHED CONTRACTOR INSTALLED | INFO. | INFORMATION | REFR. | REFRIGERATOR | | |
| CH.R. | CHAIR RAIL | INSUL. | INSULATION | REINF. | REINFORCE, REINFORCED or REINFORCING | | |
| CL or CLG. | CENTER LINE | INT. | INTERIOR | REQ'D. | REQUIRED | | |
| CLO. | CLOSET | J | | REV. | REVISION or REVISED | | |
| CLR. | COLUMN | JAN. | JANITOR CLOSET | RM. | ROOM | | |
| CONC. | CONCRETE | JST. | JOIST | RND. | ROUND | | |
| CONF. | CONFERENCE | JT. | JOINT | S | | | |
| CONN. | CONNECTION | K | | S.A. | SUPPLY AIR | | |
| CONST. | CONSTRUCTION | KIT. | KITCHEN | S.A.B. | SOUND ATTENUATION BLANKETS | | |
| CONT. | CONTINUOUS or CONTINUE | L | | S.CONC. | SEALED CONCRETE | | |
| CONTR. | CONTRACTOR | L.F. | LINEAR FEET or LINEAR FOOT | S.D. | SMOKE DETECTOR | | |
| CPT. | CARPET | L.L.H. | LONG LEG HORIZONTAL | S.D.T. | STATIC DISSIPATIVE TILE | | |
| CPT.T. | CARPET TILE | L.L.V. | LONG LEG VERTICAL | S.N.R. | SANITARY NAPKIN RECEPTACLE | | |
| CR.R. | CRASTERS RAIL | L.P. | LOW POINT | S.P.M.R. | SINGLE-PLY MEMBRANE ROOF(ING) | | |
| CSK. | COUNTERSINK or COUNTERSUNK | LAM. | LAMINATE or LAMINATED | S.S.M. | SOLID SURFACE MATERIAL | | |
| D | | LAV. | LAVATORY | S.T.C. | SOUND TRANSMISSION COEFFICIENT | | |
| D. | DEEP or DEPTH | LBR. | LUMBER | S.V. | SHEET VINYL | | |
| D.S. | DOWNSPOUT | LKR. | LOCKER | S/V | STAIN & VARNISH | | |
| D.T. | DRAIN TILE | LKR. | LOCKER | SAN. | SANITARY | | |
| DBL. | DOUBLE | LOC. | LOCATION | SCHED. | SCHEDULE | | |
| DEG. | DEGREE | LT. | LIGHT | SECT. | SECTION | | |
| DET. | DETAIL | M | | SH. | SHELF | | |
| DIA. | DIAMETER | M.B. | MOP BASIN | SHR. | SHOWER | | |
| DIAG. | DIAGONAL | M.B.F. | MEDIUM DENSITY FIBERBOARD | SHT. | SHEET | | |
| DIFF. | DIFFUSER | M.O. | MASONRY OPENING | SIM. | SIMILAR TO | | |
| DIM. | DIMENSION | M.T. | METAL TRIM | SP.D. | SOAP DISPENSER | | |
| DISP. | DISPENSER | MACH. | MACHINE | SPEC. | SPECIFICATION(S) | | |
| DN. | DOWN | MAS. | MASONRY | SQ. | SQAURE | | |
| DR. | DOOR | MATL. | MATERIAL | SQ.FT. | SQUARE FEET | | |
| DWG.(S) | DRAWING(S) | MAX. | MAXIMUM | ST. | STAIN | | |
| DWL.(S) | DOWELS(S) | MECH. | MECHANICAL | ST.STL. | STAINLESS STEEL | | |
| DWR. | DRAWER | MEMB. | MEMBRANE | STD. | STANDARD | | |
| E | | MEZZ. | MEZZANINE | STL. | STEEL | | |
| E.F. | EACH FACE | MFG. | MANUFACTURING | STOR. | STORAGE | | |
| E.I.F.S. | EXTERIOR INSULATION FINISH SYSTEM | MFR. | MANUFACTURER or MANUFACTURED | STRUCT. | STRUCTURE or STRUCTURAL | | |
| E.J. | EXPANSION JOINT | MH. | MANHOLE | SUSP. | SUSPENDED | | |
| E.M. | ENTRY MAT | MIN. | MINIMUM | T | | | |
| E.P. | ELECTRICAL PANEL | MISC. | MISCELLANEOUS | T. | TREAD | | |
| E.W. | EACH WAY | MTD. | MOUNTED | T & B. | TOP & BOTTOM | | |
| E.W.C. | ELECTRIC WATER COOLER | MTL. | METAL | T & G. | TONGUE & GROOVE | | |
| EA. | EACH | MULL. | MULLION | T.B. | TACK BOARD | | |
| EL. | ELEVATION | MW. | MILLWORK | T.O. | TOP OF | | |
| ELEC. | ELECTRIC or ELECTRICAL | N | | T.O.C. | TOP OF CONCRETE or CURB | | |
| ENCL. | ENCLOSURE | N.I.C. | NOT IN CONTRACT | T.O.M. | TOP OF MASONRY | | |
| ENGR. | ENGINEER | N.T.S. | NOT TO SCALE | T.O.P. | TOP OF PANEL or PAVING | | |
| EP.F. | EPOXY FLOORING | NEG. | NEGATIVE | T.O.S. | TOP OF STEEL | | |
| EQ. | EQUAL | NO. or # | NUMBER | T.O.W. | TOP OF WALL | | |
| EQUIP. | EQUIPMENT | NOM. | NOMINAL | T.P. | TOILET PARTITION | | |
| EXH. | EXHAUST | O | | T.S. | TRANSITION STRIP | | |
| EXIST. | EXISTING | O.A. | OVERALL or OUTSIDE AIR | T.T.D. | TOILET TISSUES DISPENSER | | |
| EXP. | EXPOSED | O.C. | ON CENTER | TC | TIME CLOCK | | |
| EXP. AGG. | EXPOSED AGGREGATE | O.D. | OUTSIDE DIAMETER | TELE. | TELEPHONE | | |
| EXP. STR. | EXPOSED STRUCTURE | O.H. | OPPOSITE HAND | TEMP. | TEMPERED or TEMPORARY | | |
| EXT. | EXTERIOR | or | | THK. | THICK | | |
| F | | OFCI | OWNER FURNISHED CONTRACTOR INSTALLED | THRU. | THROUGH | | |
| F & I. | FURNISH & INSTALL | OFF. | OFFICE | TRANS. | TRANSFORMER | | |
| F.A. | FIRE ALARM | OFOI | OWNER FURNISHED OWNER INSTALLED | TV | TELEVISION | | |
| F.A.W.P. | FLUID APPLIED WATERPROOFING | OH. | OVERHEAD | TYP. | TYPICAL | | |
| F.D. | FLOOR DRAIN | OPNG. | OPENING | U | | | |
| F.E. | FIRE EXTINGUISHER | OPP. | OPPOSITE | U.N.O. | UNLESS NOTED OTHERWISE | | |
| F.E.C. | FIRE EXTINGUISHER CABINET | P | | U.REFR. | UNDERCOUNTER REFRIGERATOR | | |
| F.O.C. | FACE OF CONCRETE | P.B. | PORCELAIN TILE BASE | U.S.D. | UNDERSIDE OF DECK | | |
| F.P. | FIRE PROTECTION | P.F.T. | PORCELAIN FLOOR TILE | UL | UNDERWRITERS LABORATORY | | |
| F.R.P. | FIBERGLASS REINFORCED PANEL | P.LAM. | PLASTIC LAMINATE or PLASTIC LAMINATED | UNFIN. | UNFINISHED | | |
| F.R.P. | FIBERGLASS REINFORCED PLASTIC | | | UR. | URINAL | | |
| FAB. | FABRIC | | | UTIL. | UTILITIES | | |

ARCHITECTURAL GRAPHIC SYMBOLS

ROOM NAME

101 ROOM NUMBER & NAME

BAY SERVICE BAY TAG

01

XX AD101 EXTERIOR ELEVATION REFERENCE

1 A101 DETAIL / CALLOUT REFERENCE

0 COLUMN CENTER LINE

0 EXISTING COLUMN CENTER LINE

1 A101 VIEW NAME

SCALE: 1/8" = 1'-0"

DRAWING TITLE

DRAWING SCALE

SHEET NUMBER OF DRAWING

A3-02A Match line A3-02A Match line MATCH LINE REFERENCE

P1a PT-1 PARTITION TYPE

? KEYED NOTE SYMBOL

LIFT TAG

EQXXX FURNITURE, FIXTURES, EQUIPMENT

1t GLAZED OPENING REFERENCE

1 DRAWING REVISION

VCT-1 CPT-1 TS-1 FLOOR MATERIAL REFERENCE

MATERIALS LEGEND


| | |
|--|-----------------------|
| | EARTH |
| | CONCRETE |
| | SAND |
| | CONCRETE MASONRY UNIT |
| | BRICK |
| | RIGID INSULATION |
| | GRAVEL |
| | BATT INSULATION |
| | ROUGH LUMBER |
| | WOOD BLOCKING |

GENERAL NOTES

- EXISTING CONDITIONS ARE BASED ON INFORMATION OBTAINED FROM EXISTING DRAWINGS AND FIELD SURVEY AND SHALL NOT BE CONSTRUED AS "AS-BUILT". THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION.
- ALL DIMENSIONS ARE FINISHED DIMENSIONS TO FACE OF GYP. BOARD, CMU WALLS, ETC. UNLESS NOTED OTHERWISE.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN FIELD AND NOTIFY ARCHITECT AND OWNER OF ALL DISCREPANCIES PRIOR TO COMMENCING WORK.
- CONTRACTOR SHALL VERIFY AND BECOME FAMILIAR W/ ALL EXISTING CONDITIONS.
- THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS INCLUDING THE BUILDING AND MAINTENANCE OF (DUST TIGHT PARTITIONS, DAILY VACUUMING, MOPPING, FLOOR MATS AND PROVISIONS OF CLEAN FLOOR MATS AT PROJECT ENTRANCES) TO PREVENT THE INFILTRATION OF DIRT AND DUST FROM THE CONSTRUCTION AREAS INTO THE OWNER OCCUPIED AREA.
- PATCH ALL FINISHES DISTURBED BY THE WORK AND WHERE UNFINISHED SURFACES HAVE BEEN EXPOSED BY DEMOLITION, PATCHING MUST MATCH ADJACENT MATERIALS, COLORS AND FINISHES.
- RESTORE OR REPLACE ALL EXISTING FINISHES DAMAGED BY WORK UNDER THIS CONTRACT.
- CHIP, GRIND AND / OR FILL EXISTING FLOOR SLABS AS REQUIRED TO PROVIDE SMOOTH LEVEL SURFACE SUITABLE FOR APPLICATIONS OF FINISH FLOOR MATERIALS, LEVEL ALL FLOORS TO WITHIN 1/8" PER FOOT TOLERANCE MAX., INCLUDING FLOOR LEVEL DIFFERENCES THAT OCCUR BETWEEN PARTITIONS SHOWN TO BE REMOVED.
- FILL ALL DEPRESSED AREAS AND HOLES IN EXISTING CONCRETE SLABS WITH FIRE RATED NON-SHRINKING CEMENTITIOUS FILL.
- PATCH / REPAIR FLOOR SUBSTRATE WHERE PARTITIONS, FLOOR OR FINISHES HAVE BEEN REMOVED.
- PATCH / REPAIR FLOORS, BASES AND WALLS TO PROVIDE AN EVEN SUBSTRATE SUITABLE FOR APPLICATIONS OF SCHEDULED FINISHES AND AS REQUIRED BY FINISH MATERIAL MANUFACTURER.
- PATCH / REPAIR ALL GAPS, HOLES, ETC. IN ALL CORRIDOR WALLS, ABOVE CEILING TO ACHIEVE A SMOKE BARRIER.
- PLUG HOLES THROUGH FLOOR SLABS WHERE PIPES OR DUCTS HAVE BEEN REMOVED WITH FIRE RATED NON-SHRINKING GROUT, FINISH FLUSH WITH EXISTING FLOOR SLAB AND TROWEL SMOOTH. SEE MECHANICAL, PLUMBING, ELECTRICAL, AND FIRE PROTECTION DRAWINGS FOR REMOVAL OF EXISTING PIPES, CONDUITS AND DUCTS.
- ALL PENETRATIONS IN GYPSUM BOARD PARTITIONS SHALL BE SEALED WITH ACOUSTICAL SEALANT OR FIRE RATED ASSEMBLIES WHERE REQUIRED BY THE DRAWINGS ON BOTH SIDES OF PARTITIONS.
- ALL NEW OPENINGS THROUGH EXISTING MASONRY WALL/PARTITIONS SHALL BE REINFORCED WITH STEEL ANGLES AS REQUIRED. VERIFY LINTEL SIZE WITH ARCHITECT AND / OR STRUCTURAL ENGINEER.
- PROVIDE DOGLEG OFFSET IN PARTITIONS WHERE EXISTING AND / OR NEW EQUIPMENT, DUCTWORK, PIPES, ETC OCCUR TO PERMIT CONSTRUCTION OF A CONTINUOUS PARTITION TO STRUCTURE ABOVE.
- PIPE AND COLUMN FURRING SHALL BE HELD AS CLOSE TO THE PIPING AND / OR COLUMNS AS POSSIBLE, UNLESS OTHERWISE NOTED. VERIFY CONDITIONS WITH ARCHITECT.
- UNLESS OTHERWISE NOTED, ALL PARTITIONS, DOORS AND DOOR FRAMES IN SCHEDULED ROOMS SHALL BE CLEANED, PRIMED AND PAINTED. INCL. GRILLS, LOUVERS AND VENTS. PROTECT AND/OR REMOVE AND REINSTALL EXISTING DOOR HARDWARE PRIOR TO PAINTING.
- WITHIN THE PROJECT LIMITS/AREA OF WORK, PAINT ALL PLASTER, GYPSUM BOARD SURFACES, CONCRETE, CONCRETE MASONRY UNITS, STEEL, ETC. - UNLESS OTHER FINISHES ARE SCHEDULED.
- WITHIN THE PROJECT LIMITS, PAINT ALL EXPOSED NEW AND EXISTING PIPING, CONDUIT, WIREMOLD, ELECTRICAL PANELS, DUCTWORK, EQUIPMENT ACCESS PANELS, HANGER SUPPORTS, UNISTRUT ETC -TO MATCH WALL FINISHES, UNLESS OTHERWISE NOTED. DO NOT PAINT OVER "UL", "FM", OR SIMILAR LABELS, INCLUDING MECHANICAL AND ELECTRICAL NAME PLATES.
- SEE MECHANICAL DRAWINGS FOR DUCT PENETRATIONS THRU PARTITIONS AND PROVIDE REQUIRED OPENINGS. SUCH OPENINGS SHALL BE FRAMED WITH STUD TRACK AND METAL TRIM. CAULK PERIMETER AFTER INSULATION OF DUCT WORK ON BOTH SIDES OR PARTITION. PROVIDE FIRE RATED SEALANT AT ALL RATED PARTITIONS ON BOTH SIDES.
- ALL PENETRATIONS TO BE 2-HR FIRE-RATED PER USPS MPF SPECIFICATION, SECTION 3.6.
- ALL FIXTURES & MECHANICAL SYSTEMS WITHIN LIFT CLEARANCE AREAS KEYNOTED AS 160 ON SHEET AD150 SHALL BE RELOCATED ABOVE 16' - 3" A.F.F.
- CONTRACTOR TO VERIFY INSTALLATION SEQUENCE/PREPARE SITE FOR INSTALLATION OF OWNER INSTALLED LIFT PRIOR TO INSTALLATION OF FLOORING.
- WITHIN THE PROJECT LIMITS/AREA OF WORK, PAINT ALL EXISTING BOLLARDS SAFETY YELLOW TO COMPLY WITH USPS STANDARDS. CONTRACTOR TO FIELD VERIFY QUANTITY.
- CONTRACTOR TO CONFIRM EXISTING CONDITIONS ALLOW ADEQUATE CLEARANCE FOR NEW LIFT(S) PRIOR TO LIFT INSTALLATION; CONTRACTOR TO NOTIFY ARCHITECT AND OWNER OF ANY CONFLICTS PRIOR TO COMMENCING WORK.
- EGRESS PATHS MUST REMAIN CLEAR OF OBSTRUCTION AT ALL TIMES TO ENSURE SAFE EMERGENCY EXIT. ANY EXISTING EQUIPMENT OR FURNITURE WITHIN THE PATH OF TRAVEL MUST BE RELOCATED OR REMOVED. CONTRACTOR TO WORK WITH OWNER AS NEEDED TO DETERMINE RELOCATION AREA.

| SHEET INDEX | |
|---------------|---|
| SHEET NUMBER | SHEET NAME |
| GENERAL | |
| G001 | COVER SHEET |
| G002 | GENERAL INFORMATION |
| G003 | LIFE SAFETY PLAN |
| CIVIL | |
| C001 | GENERAL NOTES |
| CD100 | EXISTING CONDITIONS AND DEMOLITION PLAN |
| C200 | PROPOSED CONDITIONS |
| C500 | DETAILS I |
| C501 | DETAILS II |
| ARCHITECTURAL | |
| A001 | SCHEDULES |
| AD100 | OVERALL FIRST FLOOR & MEZZANINE DEMOLITION PLAN |
| AD150 | OVERALL FIRST FLOOR & MEZZANINE DEMOLITION REFLECTED CEILING PLAN |
| A100 | OVERALL PROPOSED FIRST FLOOR & MEZZ. FLOOR PLAN |
| A150 | OVERALL PROPOSED FIRST FLOOR & MEZZ. FLOOR PLAN |
| A200 | EXTERIOR ELEVATIONS |
| A500 | DETAILS |
| ELECTRICAL | |
| E001 | ELECTRICAL GENERAL INFORMATION |
| ES100 | ELECTRICAL SITE PLAN |
| ED100 | ELECTRICAL DEMOLITION PLAN |
| E100 | ELECTRICAL POWER & LIGHTING PLANS |
| E400 | ELECTRICAL ONE-LINE DIAGRAM |
| E401 | ELECTRICAL SCHEDULES |
| E500 | ELECTRICAL DETAILS |
| E501 | ELECTRICAL DETAILS |

1 FIRST FLOOR LIFE SAFETY PLAN
 G003 SCALE: 1/8" = 1'-0"

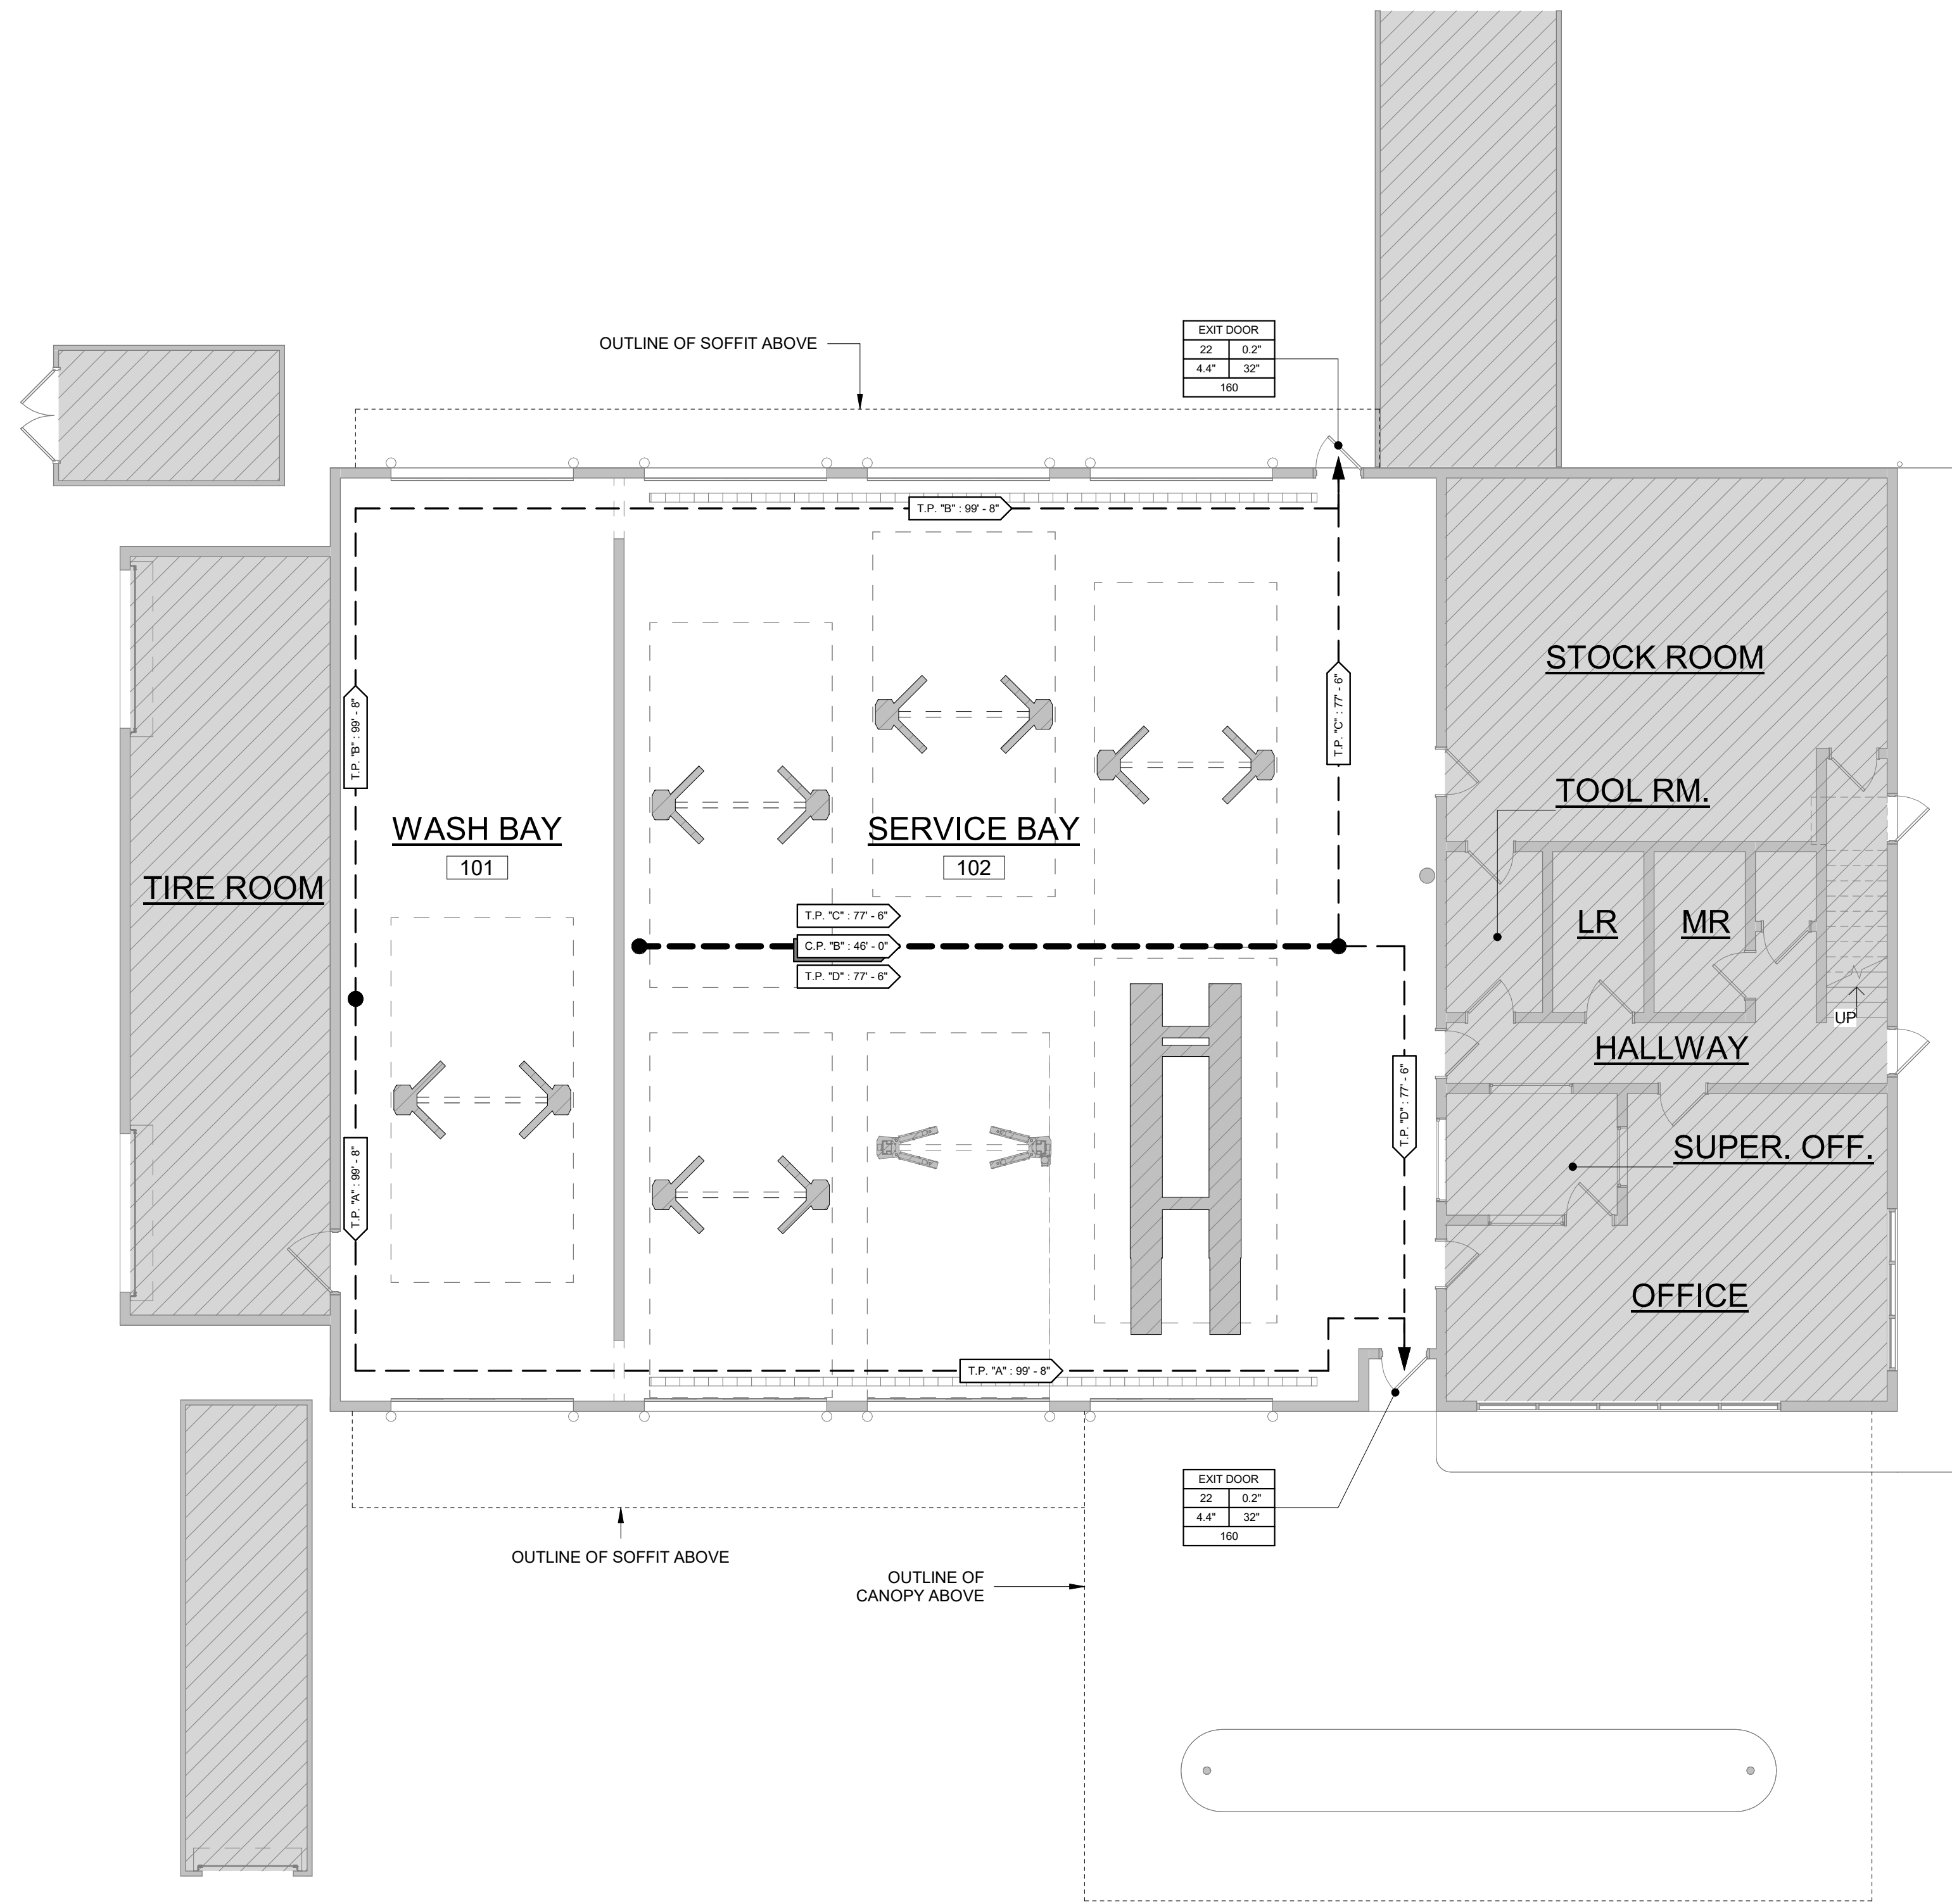

| |
|-----------|
| EXIT DOOR |
| 22' 0" |
| 4'-0" 3" |
| 160 |

| |
|-----------|
| EXIT DOOR |
| 22' 0" |
| 4'-0" 3" |
| 160 |

GENERAL NOTES

REFER TO G.002 FOR GENERAL NOTES


REFERENCE CODES

- 2023 USPS HANDBOOK AS-503 - STANDARD
- DESIGN CRITERIA
- 2021 INTERNATIONAL BUILDING CODE
- 2021 INTERNATIONAL EXISTING BUILDING CODE


LEGEND

- ▨ NOT IN SCOPE
- COMMON PATH OF TRAVEL
- EXIT ACCESS PATH OF TRAVEL

EXIT IDENTIFICATION SYMBOL

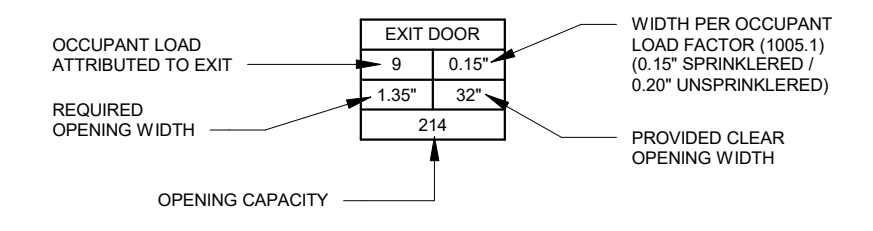

EGRESS TRAVEL PATH & DISTANCE SYMBOL

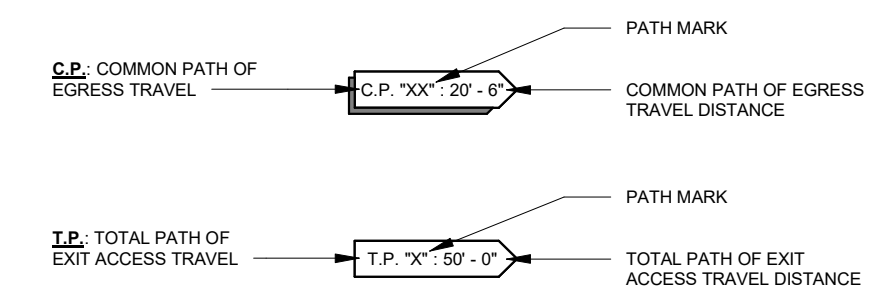


EGRESS ANALYSIS

(NO SPRINKLERS IN AREA OF WORK)

| ROOM NUMBER | ROOM NAME | OCCUPANCY | OCCUPANT LOAD OF SPACE | MAX OCCUPANT LOAD OF SPACE FOR (1) EXIT | EGRESS TRAVEL DISTANCES / COMMON PATH DISTANCE | MAXIMUM COMMON PATH OF EGRESS TRAVEL DISTANCE | MAXIMUM EXIT ACCESS TRAVEL DISTANCE |
|-------------|-------------|-----------|------------------------|---|--|---|-------------------------------------|
| 101 | WASH BAY | F1 | 1,094 SF/100 = 11 | 49 | 99'-8" / - | 75 FT | 200 FT |
| 102 | SERVICE BAY | F1 | 3,217 SF/100 = 33 | 49 | 77'-0" / 46'-0" | 75 FT | 200 FT |

MAXIMUM COMMON PATH OF EGRESS TRAVEL DISTANCE (F1): 75 FT UNSPRINKLERED / 100 FT SPRINKLERED
 MAXIMUM EXIT ACCESS TRAVEL DISTANCE (F1): 200 FT UNSPRINKLERED / 250 FT SPRINKLERED

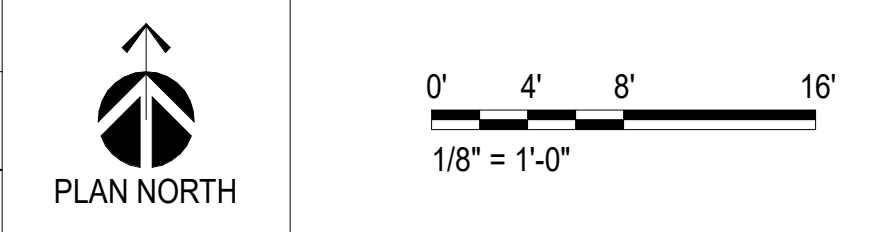

| ROOM FINISH SCHEDULE- 1ST FLOOR | | | | | | | | | | | | | | | | |
|---------------------------------|-------------|----------------|--------------|--------|-----|--------|-----|--------|-----|--------|-----|----------|--------|---------|------------------|---|
| NO. | ROOM NAME | FLOOR MATERIAL | FLOOR FINISH | WALLS | | | | | | | | CEILING | | REMARKS | | |
| | | | | NORTH | | EAST | | SOUTH | | WEST | | MATERIAL | FINISH | | | |
| 101 | WASH BAY | CONC. | EPOXY | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | EXIST. TO REMAIN | 1 |
| 102 | SERVICE BAY | CONC. | EPOXY | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | P-1 | EXIST. | EXIST. TO REMAIN | 1 |

| LIFT SCHEDULE | | | | | | |
|--------------------|---------------|-------------|-------------|------------|-------------|---------|
| SERVICE BAY NUMBER | EXISTING LIFT | | NEW LIFT | | | REMARKS |
| | LIFT TYPES | CAPACITY LB | LIFT NUMBER | LIFT TYPES | CAPACITY LB | |
| | | | | | | |

| REFINISHED DOOR SCHEDULE | | | | | |
|--------------------------|----------|--------|----------|--------|----------|
| NO. | DOOR | | FRAME | | REMARKS |
| | MATERIAL | FINISH | MATERIAL | FINISH | |
| 101 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 102 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 103 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 104 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 105 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 106 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 107 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |
| 108 | EXIST. | P-6 | EXIST. | P-6 | 1, 2 & 4 |

ROOM FINISH GENERAL NOTES

- REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.

ROOM FINISH SCHEDULE REMARKS


- PRESSURE CLEAN/GRIND EXISTING FLOOR AND WALL SURFACE. PATCH & REPAIR CHIPPED & CRACKED SURFACE. PREP FLOOR TO RECEIVE FLOOR FINISH AS REQUIRED PER MANUFACTURER.

DOOR SCHEDULE REMARKS

- CONTRACTOR TO FIELD VERIFY EXISTING OPENING DIMENSIONS.
- REFER TO SPECIFICATION FOR ADDITIONAL INFORMATION.
- CONTRACTOR TO FIELD VERIFY SURROUNDING AREAS OF DOOR OPENING, RETROFIT/RELOCATE EXISTING UTILITIES/DEVICE ASSEMBLIES AS REQUIRED FOR PROPER INSTALLATION & OPERATION OF NEW DOOR.
- PAINT BOTH SIDES AND EDGES OF ALL EXISTING HOLLOW METAL DOORS WITH P-6 PER USPS STANDARDS.

LIFT SCHEDULE REMARKS

- REFER TO SPECIFICATION FOR LIFT MODEL INFORMATION.
- REFER TO SHEET A500 FOR LIFT DETAILS.

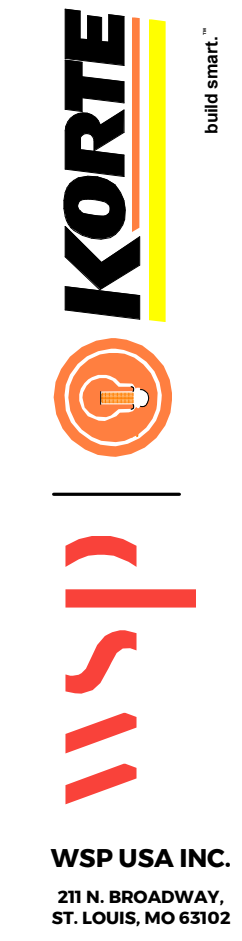


WSP USA INC.
20 N. BROADWAY
ST. LOUIS, MO 63102

LYNNWOOD (NORTH)
6821 208TH ST SW
LYNNWOOD, WA 98036




90% DESIGN SUBMITTAL
 SCHEDULES
 Scale: AS NOTED Date: Jan 12, 2024
 Project: LYNNWOOD (NORTH)
 USPS File Number: E68779
 Revision: 5
 07/19/2024

1 OVERALL FIRST FLOOR DEMOLITION PLAN
AD100 SCALE: 1/8" = 1'-0"

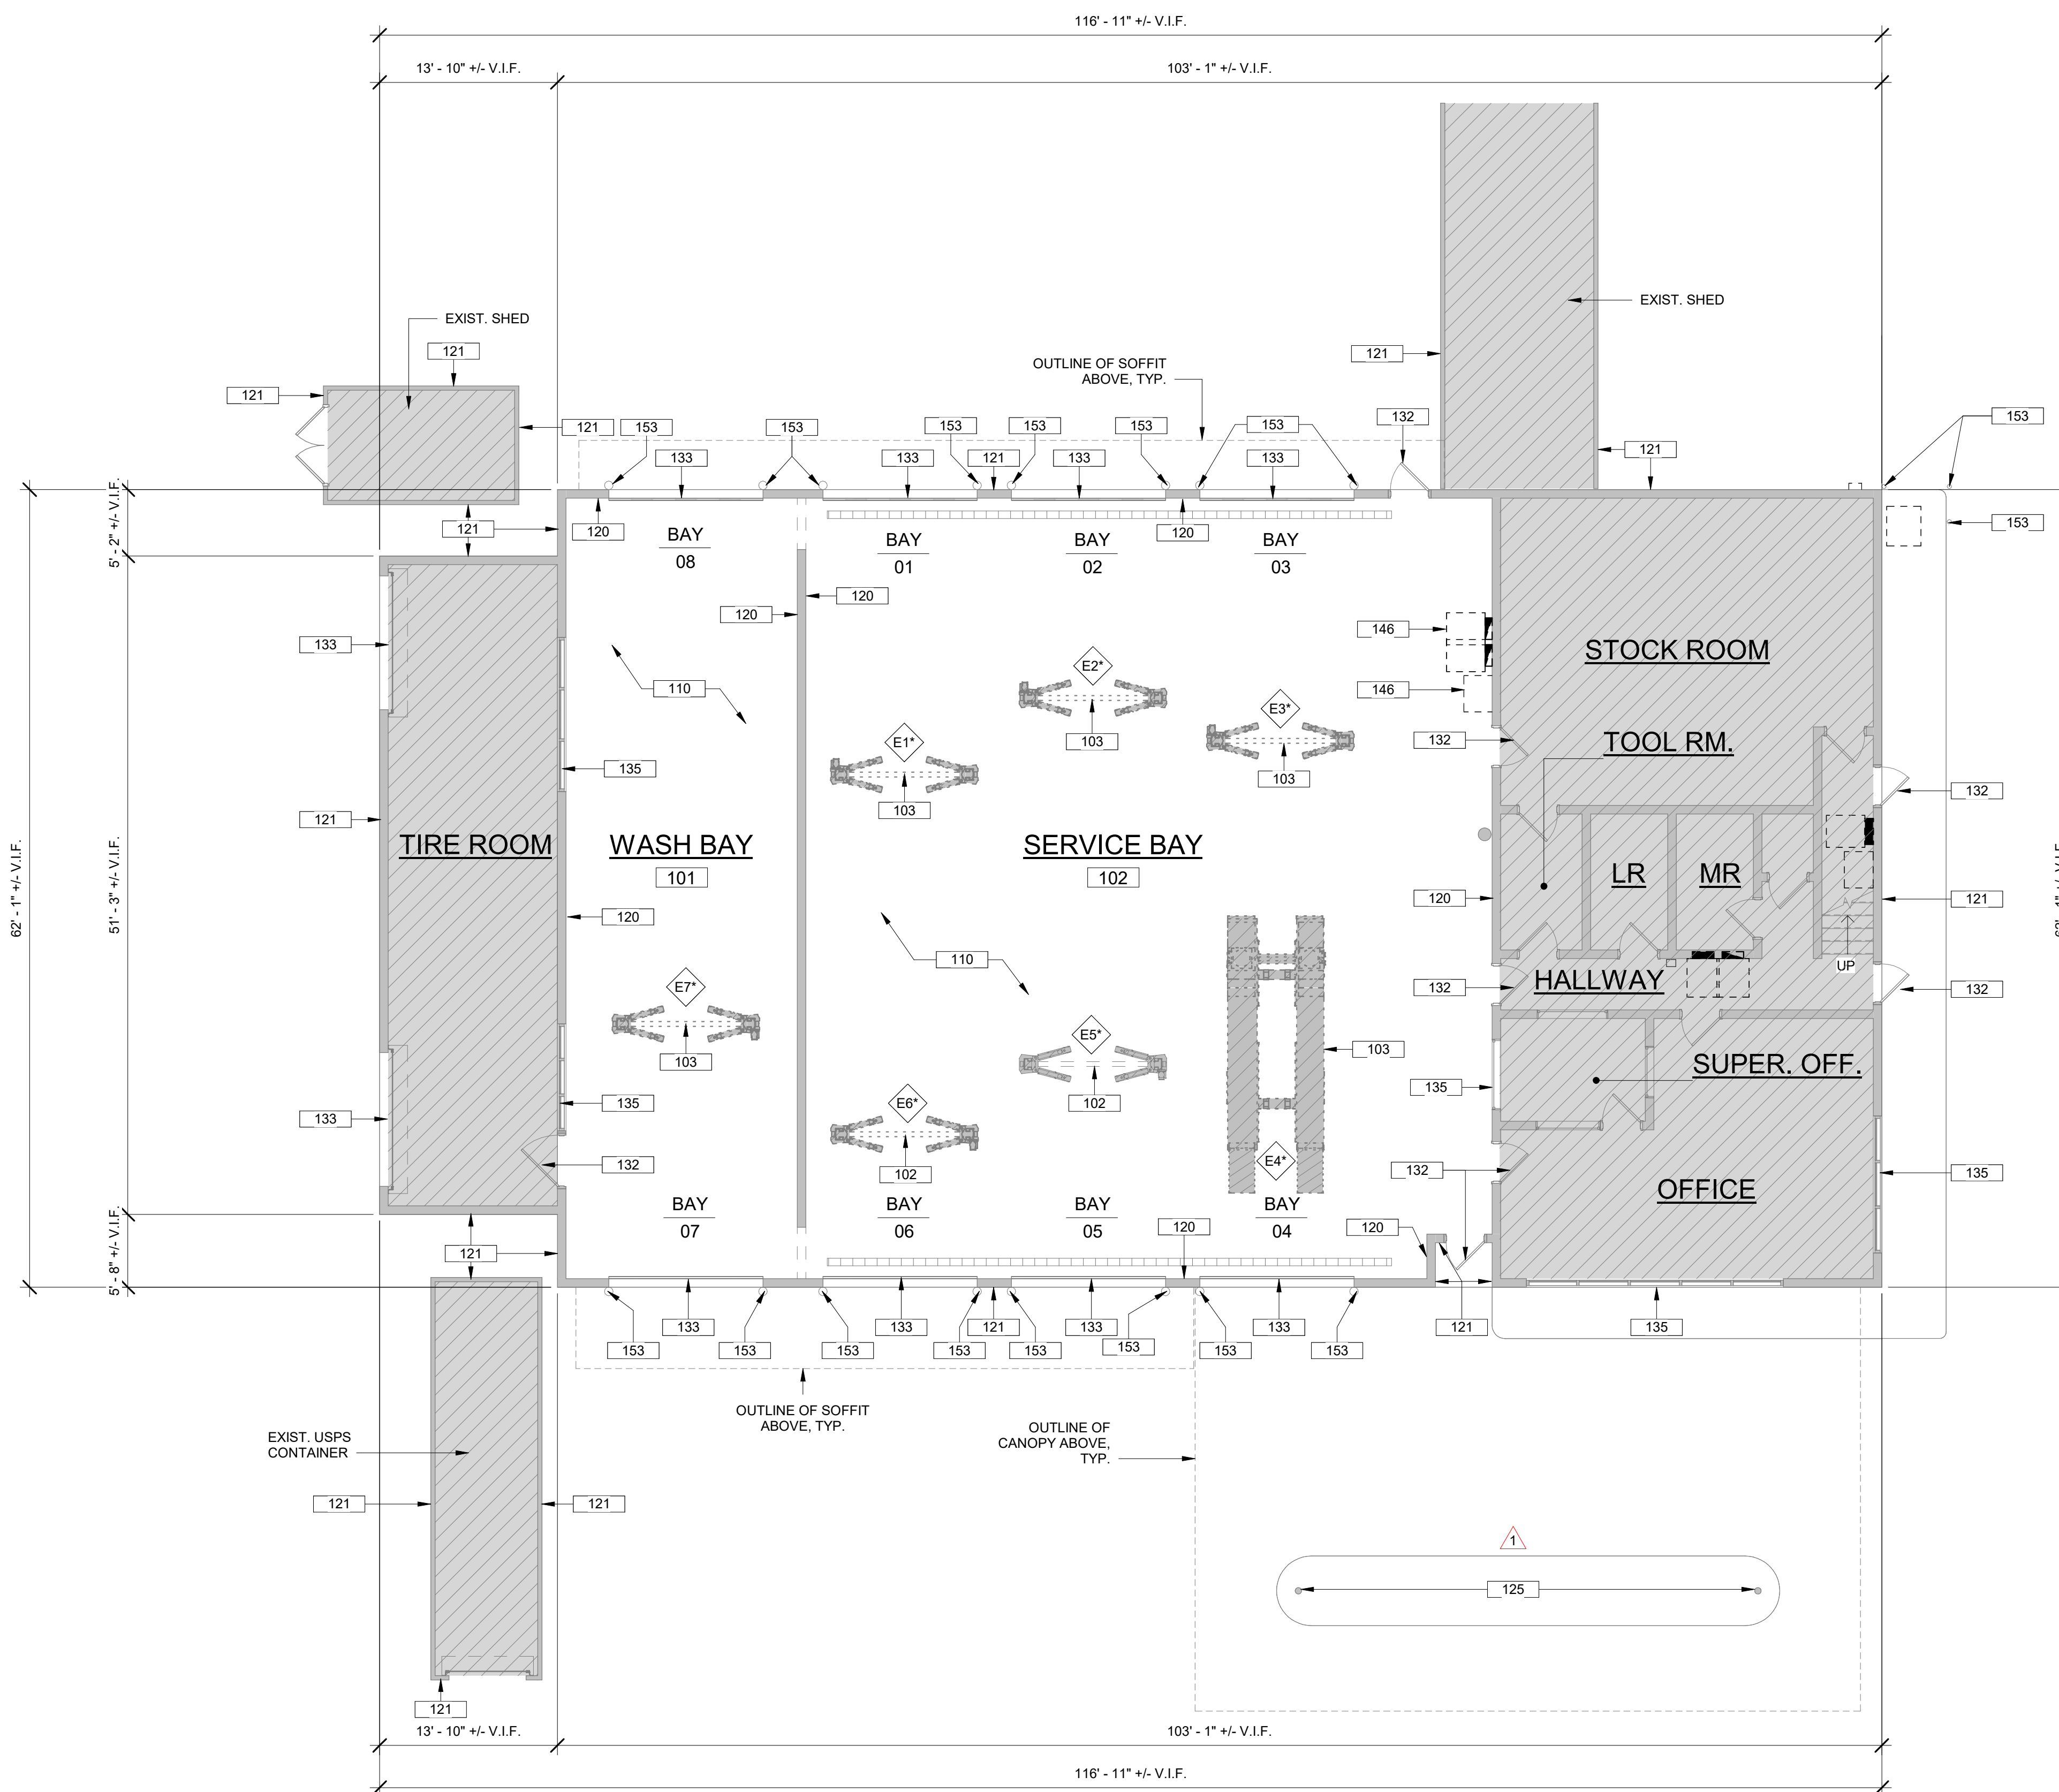

AD100 SCALE: 1/8" = 1'-0"

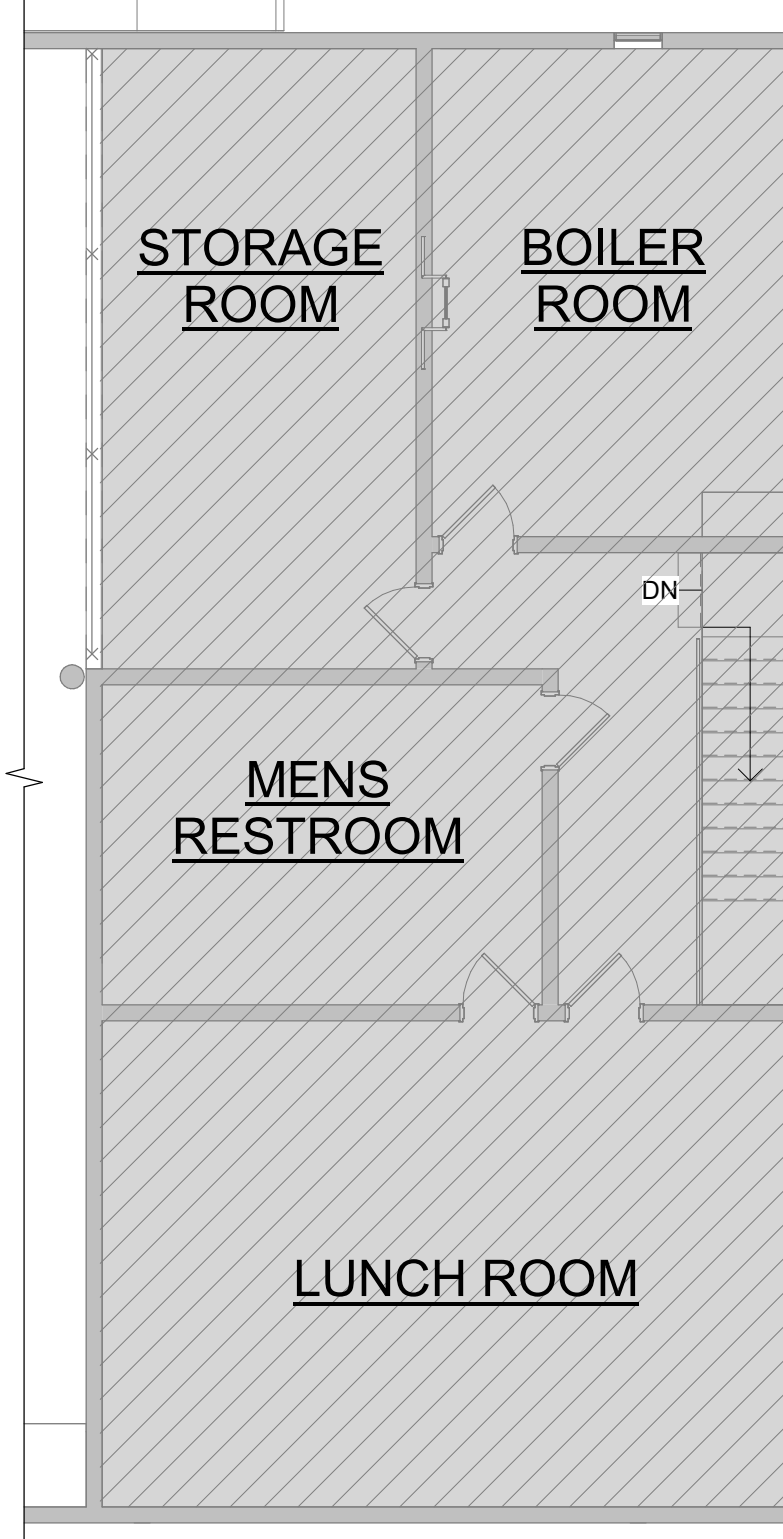

2 OVERALL MEZZANINE DEMOLITION PLAN
AD100 SCALE: 1/8" = 1'-0"

DEMO GENERAL NOTES

- ITEMS BELOW APPLY TO DASHED LINES AS INDICATED ON THE DEMOLITION PLAN UNLESS OTHERWISE NOTED.
- THE BUILDING AREAS ADJACENT TO THE AREA OF CONSTRUCTION WILL REMAIN OCCUPIED THROUGHOUT CONSTRUCTION. THE CONTRACTOR SHALL TAKE EVERY PRECAUTION FOR THE SAFETY AND PROTECTION OF ALL PERSONS IN THE BUILDING UNDER CONSTRUCTION FOR THE DURATION OF THE PROJECT.
 - EXISTING CONDITIONS ARE BASED ON INFORMATION OBTAINED FROM EXISTING DRAWINGS AND FIELD SURVEY AND SHALL NOT BE CONSTRUED AS "AS-BUILT." THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION.
 - IN THE EVENT THAT QUESTIONABLE ENVIRONMENTAL MATERIALS ARE SUSPECTED OR IDENTIFIED BY THE CONTRACTOR, THE OWNER'S REPRESENTATIVE SHALL BE NOTIFIED IMMEDIATELY TO DETERMINE THE EXTENT OF MATERIAL AND THE COURSE OF ACTION.
 - ALL MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION ELEMENTS WITHIN THE AREA OF DEMOLITION THAT ARE TO BE REMOVED, SHALL BE CUT AND CAPPED AND MADE SAFE BY A SUBCONTRACTOR TRADESMEN APPROPRIATE TO THE SCOPE PRIOR TO DEMOLITION AND REMOVAL WORK OCCURRING BY THE DEMOLITION SUBCONTRACTOR.
 - ALL DASHED PARTITIONS, WALL FURRING, SURFACE APPLIED MATERIALS OR FINISHES (I.E. WALL COVERINGS, WOOD PANELING, ETC.) PIPE AND CHASE FURRING IN INTERIOR SPACES AND AT PERIMETER WALLS SHALL BE REMOVED FULL HEIGHT INCLUDING DOORS AND FRAMES, ETC. WITHIN THE PARTITIONS.
 - REQUIREMENTS OF STRUCTURAL WORK: DO NOT CUT STRUCTURAL WORK IN A MANNER RESULTING IN A REDUCTION OF LOAD-CARRYING CAPACITY OF LOAD/DEFLECTION RATIO.
 - OPERATIONAL AND SAFETY LIMITATIONS: DO NOT CUT OPERATIONAL ELEMENTS AND SAFETY-RELATED COMPONENTS IN A MANNER RESULTING IN A REDUCTION OF CAPACITIES TO PERFORM IN A MANNER INTENDED OR RESULTING IN A DECREASED OPERATIONAL LIFE, INCREASED MAINTENANCE, OR DECREASED SAFETY.
 - VISUAL REQUIREMENTS: DO NOT CUT WORK WHICH IS EXPOSED ON THE EXTERIOR OR EXPOSED IN OCCUPIED SPACES OF THE BUILDING IN A MANNER RESULTING IN A REDUCTION OF VISUAL QUALITIES OR RESULTING IN SUBSTANTIAL EVIDENCE OF THE DEMOLITION WORK JUDGED BY THE ARCHITECT TO BE CUT AND PATCHED IN A VISUALLY UNSATISFACTORY MANNER.
 - LOADING: DO NOT SUPERIMPOSE LOADS AT ANY POINT UPON EXISTING STRUCTURE BEYOND DESIGN CAPACITY INCLUDING LOADS ATTRIBUTABLE TO MATERIALS, CONSTRUCTION EQUIPMENT, DEMOLITION OPERATIONS AND SHORING AND BRACING.
 - VIBRATION: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD INDUCE VIBRATION INTO ANY ELEMENT OF THE STRUCTURE.
 - FIRE: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE ANY FIRE HAZARD UNLESS OTHERWISE APPROVED BY CONTRACTING OFFICER.
 - WATER: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE EXCESSIVE WATER RUN-OFF, AND WATER POLLUTION.
 - AIR POLLUTION: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE UNCONTROLLED DUST, FUMES, OR OTHER DAMAGING AIR POLLUTION.

KEYNOTES LEGEND - DEMO


| MARK | DESCRIPTION |
|------|--|
| 102 | EXISTING LIFT TO REMAIN. NOT IN CONTRACT (N.I.C.) |
| 103 | EXISTING LIFT TO BE REPLACED/INSTALLED BY OTHERS (N.I.C.). PATCH AND REPAIR FLOOR AS REQUIRED. CONTRACTOR TO VERIFY SEQUENCE OF CONSTRUCTION. |
| 110 | EXISTING FLOOR FINISH TO BE REMOVED; CLEAN AND PREP EXISTING CONCRETE SUBSTRATE FOR NEW FLOOR FINISH. PATCH AND REPAIR SURFACE AS REQUIRED. PRESSURE WASH/CLEAN EXISTING TRENCH DRAINS AND COVER PLATES AS REQUIRED. PREPARE EXISTING STRIPED CIRCULATION AREAS TO RECEIVE NEW FINISH. |
| 120 | PREPARE INTERIOR WALL SURFACES AND ASSOCIATED EXISTING LOUVERS TO RECEIVE NEW FINISH; CLEAN, PREP, AND PATCH/REPAIR AS REQUIRED; CONTRACTOR TO VERIFY LOUVER QUANTITY. |
| 121 | POWER WASH EXTERIOR WALL SURFACES; PREPARE EXISTING LOUVERS TO RECEIVE NEW FINISH; CLEAN, PREP, AND PATCH/REPAIR AS REQUIRED; CONTRACTOR TO VERIFY QUANTITY OF LOUVERS. |
| 125 | PRESSURE WASH/CLEAN EXISTING CANOPY STRUCTURE; PATCH/REPAIR SURFACE AS REQUIRED. |
| 132 | PREPARE EXISTING DOOR AND FRAME TO RECEIVE NEW FINISH; CLEAN, PREP, AND PRIME AS REQUIRED; TYP. |
| 133 | WASH/CLEAN INTERIOR AND EXTERIOR OF EXISTING OVERHEAD SECTIONAL DOOR AND FRAME ASSEMBLY; TYP. |
| 135 | WASH/CLEAN INTERIOR AND EXTERIOR OF EXISTING WINDOW AND FRAME ASSEMBLY; TYP. |
| 146 | EXISTING ELECTRICAL EQUIPMENT; REFER TO ELECTRICAL DRAWINGS FOR SCOPE. |
| 153 | PREPARE EXISTING BOLLARD TO RECEIVE NEW FINISH; CLEAN, PREP, AND PATCH/REPAIR AS REQUIRED; TYP. |

LEGEND

- NOT IN SCOPE
- INDICATES ELEMENTS TO BE DEMO'D. SEE KEYNOTES FOR DETAILS
- LIFT TAG
- INDICATES EXISTING LIFTS
- INDICATES LIFTS NOT IN SCOPE



1 OVERALL FIRST FLOOR DEMOLITION REFLECTED CEILING PLAN
 AD150 SCALE: 1/8" = 1'-0"

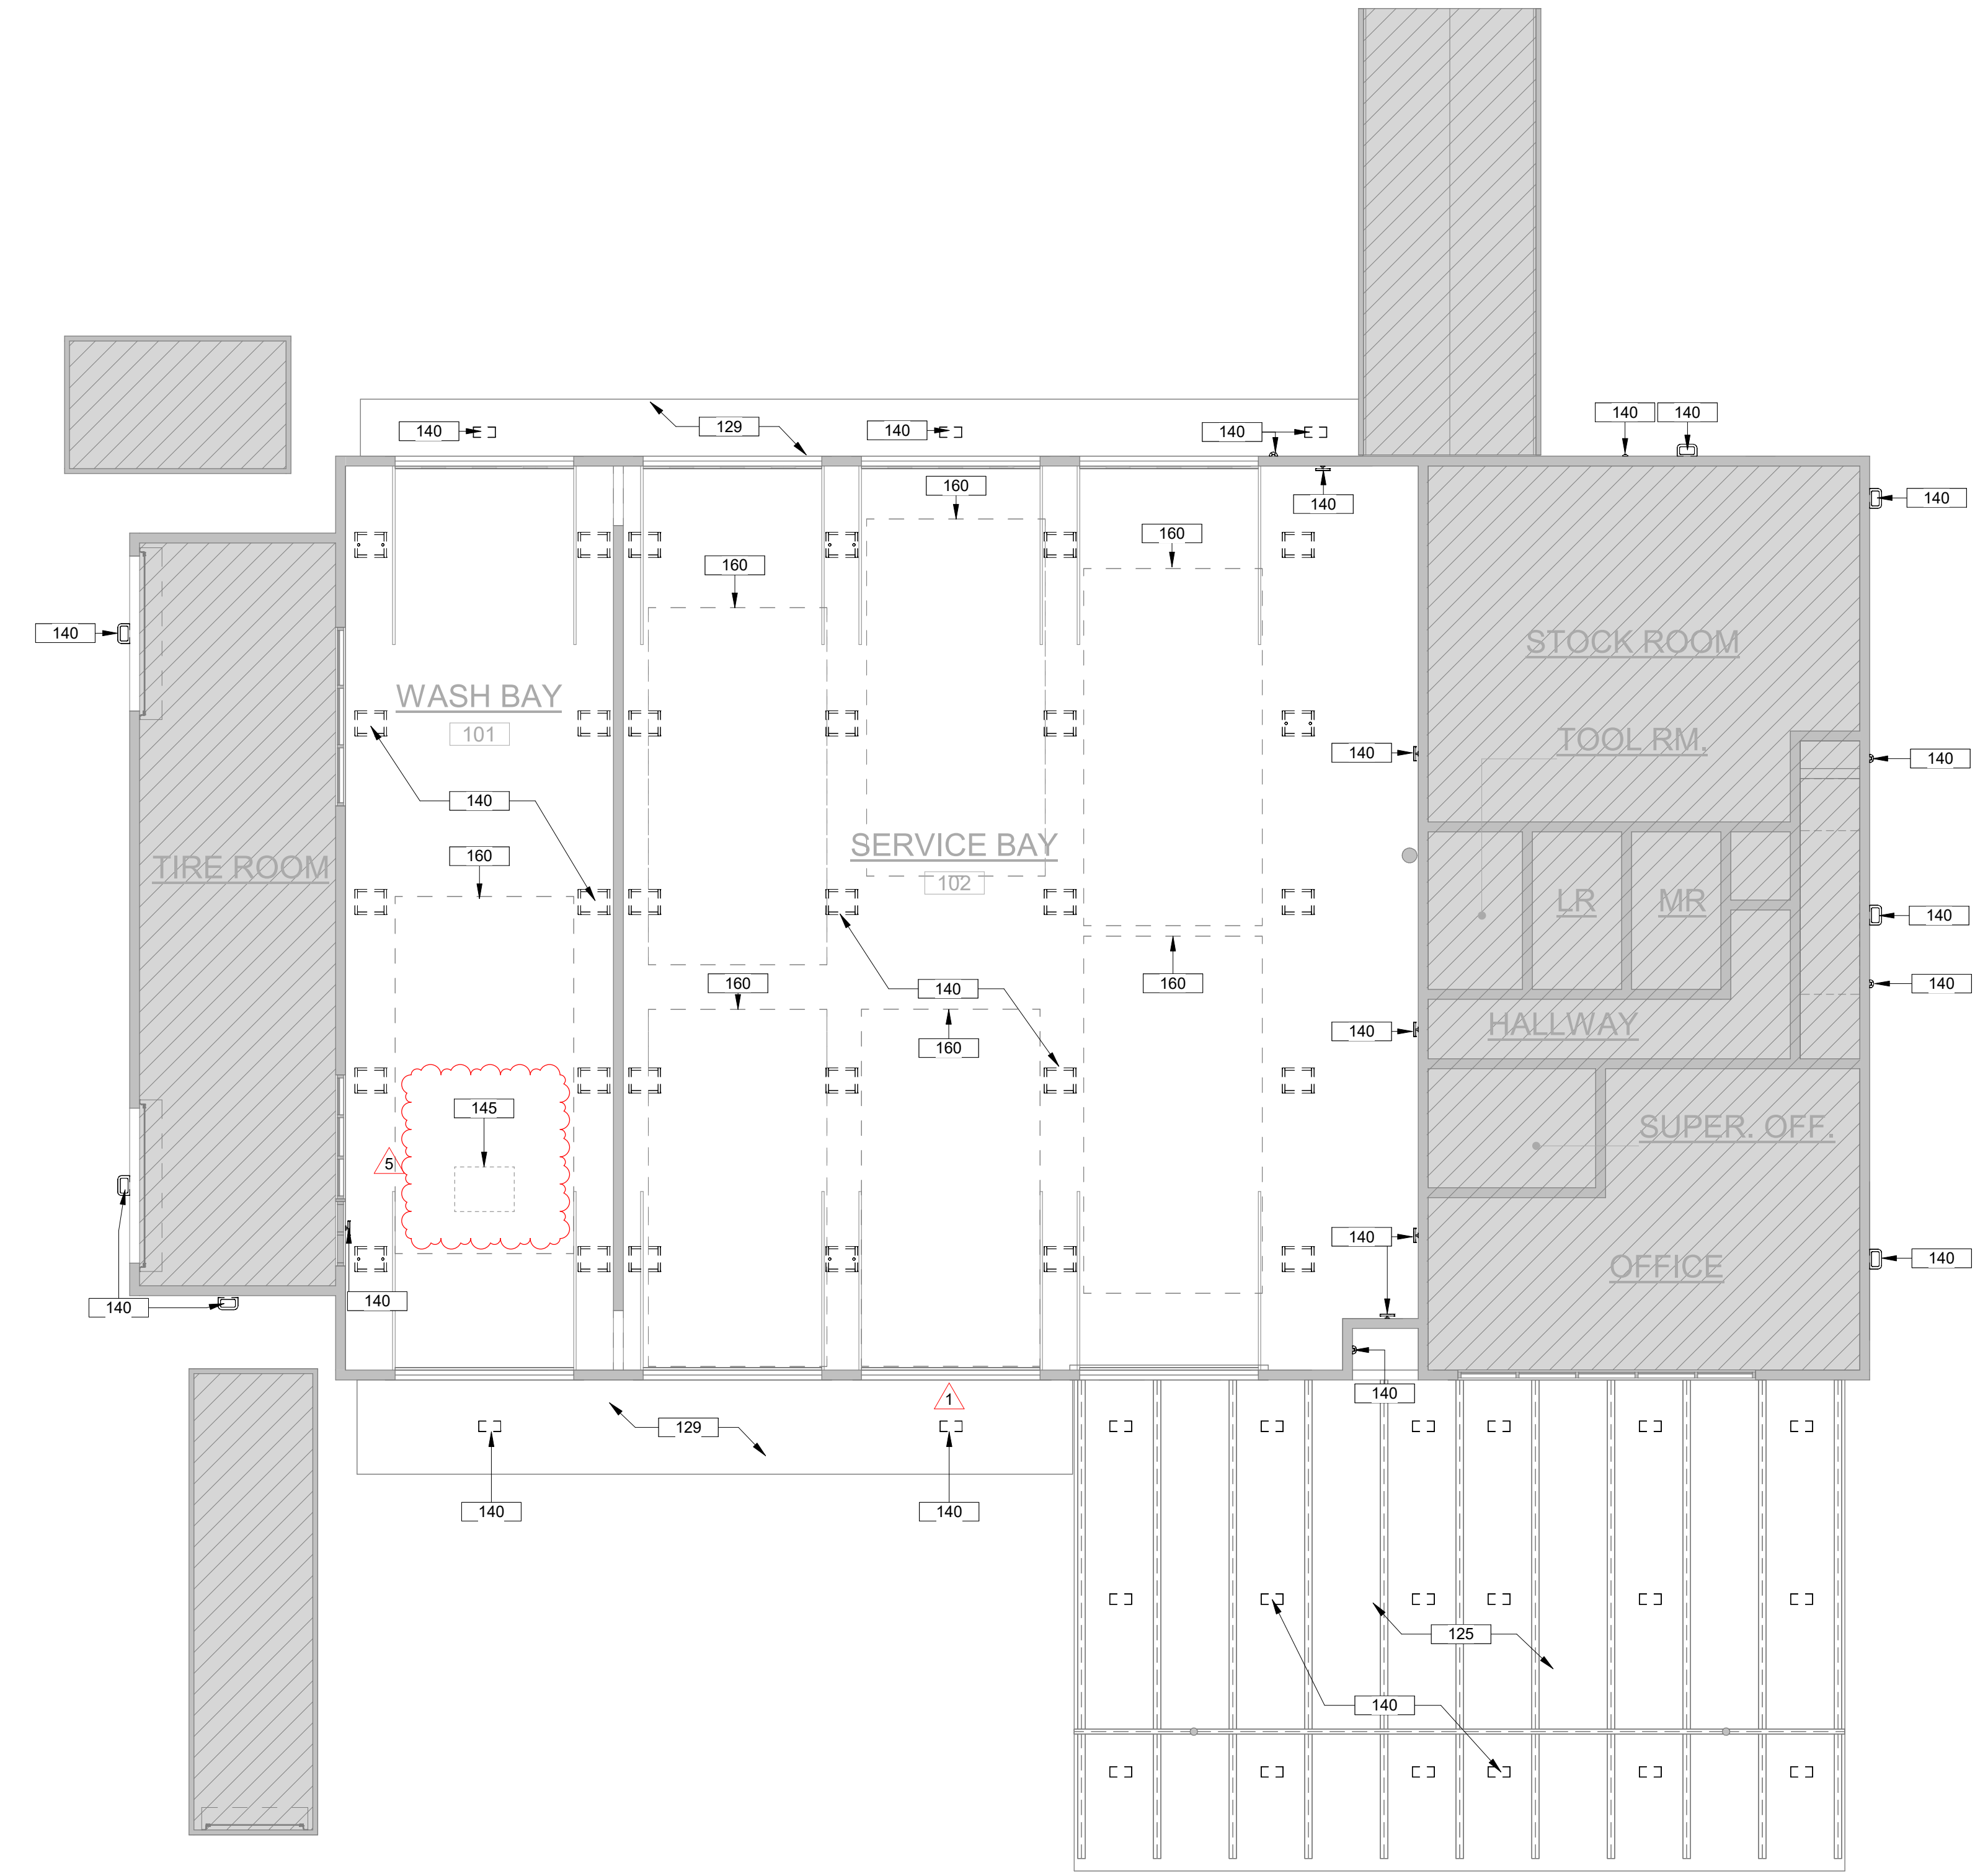

DEMO GENERAL NOTES



- ITEMS BELOW APPLY TO DASHED LINES AS INDICATED ON THE DEMOLITION PLAN UNLESS OTHERWISE NOTED.
- THE BUILDING AREAS ADJACENT TO THE AREA OF CONSTRUCTION WILL REMAIN OCCUPIED THROUGHOUT CONSTRUCTION. THE CONTRACTOR SHALL TAKE EVERY PRECAUTION FOR THE SAFETY AND PROTECTION OF ALL PERSONS IN THE BUILDING UNDER CONSTRUCTION FOR THE DURATION OF THE PROJECT.
 - EXISTING CONDITIONS ARE BASED ON INFORMATION OBTAINED FROM EXISTING DRAWINGS AND FIELD SURVEY AND SHALL NOT BE CONSTRUED AS "AS-BUILT." THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION.
 - IN THE EVENT THAT QUESTIONABLE ENVIRONMENTAL MATERIALS ARE SUSPECTED OR IDENTIFIED BY THE CONTRACTOR, THE OWNER'S REPRESENTATIVE SHALL BE NOTIFIED IMMEDIATELY TO DETERMINE THE EXTENT OF MATERIAL AND THE COURSE OF ACTION.
 - ALL MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION ELEMENTS WITHIN THE AREA OF DEMOLITION THAT ARE TO BE REMOVED, SHALL BE CUT AND CAPPED AND MADE SAFE BY A SUBCONTRACTOR TRADESMAN APPROPRIATE TO THE SCOPE PRIOR TO DEMOLITION AND REMOVAL WORK OCCURRING BY THE DEMOLITION SUBCONTRACTOR.
 - ALL DASHED PARTITIONS, WALL FURRING, SURFACE APPLIED MATERIALS OR FINISHES (I.E. WALL COVERINGS, WOOD PANELING, ETC.) PIPE AND CHASE FURRING IN INTERIOR SPACES AND AT PERIMETER WALLS SHALL BE REMOVED FULL HEIGHT INCLUDING DOORS AND FRAMES, ETC. WITHIN THE PARTITIONS.
 - REQUIREMENTS OF STRUCTURAL WORK: DO NOT CUT STRUCTURAL WORK IN A MANNER RESULTING IN A REDUCTION OF LOAD-CARRYING CAPACITY OF LOAD/DEFLECTION RATIO.
 - OPERATIONAL AND SAFETY LIMITATIONS: DO NOT CUT OPERATIONAL ELEMENTS AND SAFETY-RELATED COMPONENTS IN A MANNER RESULTING IN A REDUCTION OF CAPACITIES TO PERFORM IN A MANNER INTENDED OR RESULTING IN A DECREASED OPERATIONAL LIFE, INCREASED MAINTENANCE, OR DECREASED SAFETY.
 - VISUAL REQUIREMENTS: DO NOT CUT WORK WHICH IS EXPOSED ON THE EXTERIOR OR EXPOSED IN OCCUPIED SPACES OF THE BUILDING IN A MANNER RESULTING IN A REDUCTION OF VISUAL QUALITIES OR RESULTING IN SUBSTANTIAL EVIDENCE OF THE DEMOLITION WORK JUDGED BY THE ARCHITECT TO BE CUT AND PATCHED IN A VISUALLY UNSATISFACTORY MANNER.
 - LOADING: DO NOT SUPERIMPOSE LOADS AT ANY POINT UPON EXISTING STRUCTURE BEYOND DESIGN CAPACITY INCLUDING LOADS ATTRIBUTABLE TO MATERIALS, CONSTRUCTION EQUIPMENT, DEMOLITION OPERATIONS AND SHORING AND BRACING.
 - VIBRATION: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD INDUCE VIBRATION INTO ANY ELEMENT OF THE STRUCTURE.
 - FIRE: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE ANY FIRE HAZARD UNLESS OTHERWISE APPROVED BY CONTRACTING OFFICER.
 - WATER: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE EXCESSIVE WATER RUN-OFF, AND WATER POLLUTION.
 - AIR POLLUTION: DO NOT USE MEANS, METHODS, TECHNIQUES, OR PROCEDURES WHICH WOULD PRODUCE UNCONTROLLED DUST, FUMES, OR OTHER DAMAGING AIR POLLUTION.

KEYNOTES LEGEND - DEMO

| MARK | DESCRIPTION |
|------|---|
| 125 | PRESSURE WASH/CLEAN EXISTING CANOPY STRUCTURE; PATCH/REPAIR SURFACE AS REQUIRED. |
| 129 | PREPARE EXISTING SOFFIT TO RECEIVE NEW FINISH; PATCH/REPAIR SURFACE AS REQUIRED. |
| 140 | EXISTING LIGHT FIXTURES/ELECTRICAL EQUIPMENT AND ALL RELATED HARDWARE TO BE REMOVED. CONTRACTOR TO VERIFY EXISTING FIXTURE QUANTITY. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION. |
| 145 | EXISTING HVAC EQUIPMENT TO BE RELOCATED TO ACCOMMODATE LIFT CLEARANCE @ >16'-3". |
| 160 | ALL UTILITIES, FIXTURES, MECHANICAL SYSTEMS OR ANY OBSTRUCTIONS WITHIN LIFT SERVICE AREAS SHALL BE RELOCATED ABOVE 16'-3" A.F.F. |

LEGEND

- NOT IN SCOPE
- INDICATES ELEMENTS TO BE DEMOLISHED. SEE KEYNOTES FOR DETAILS

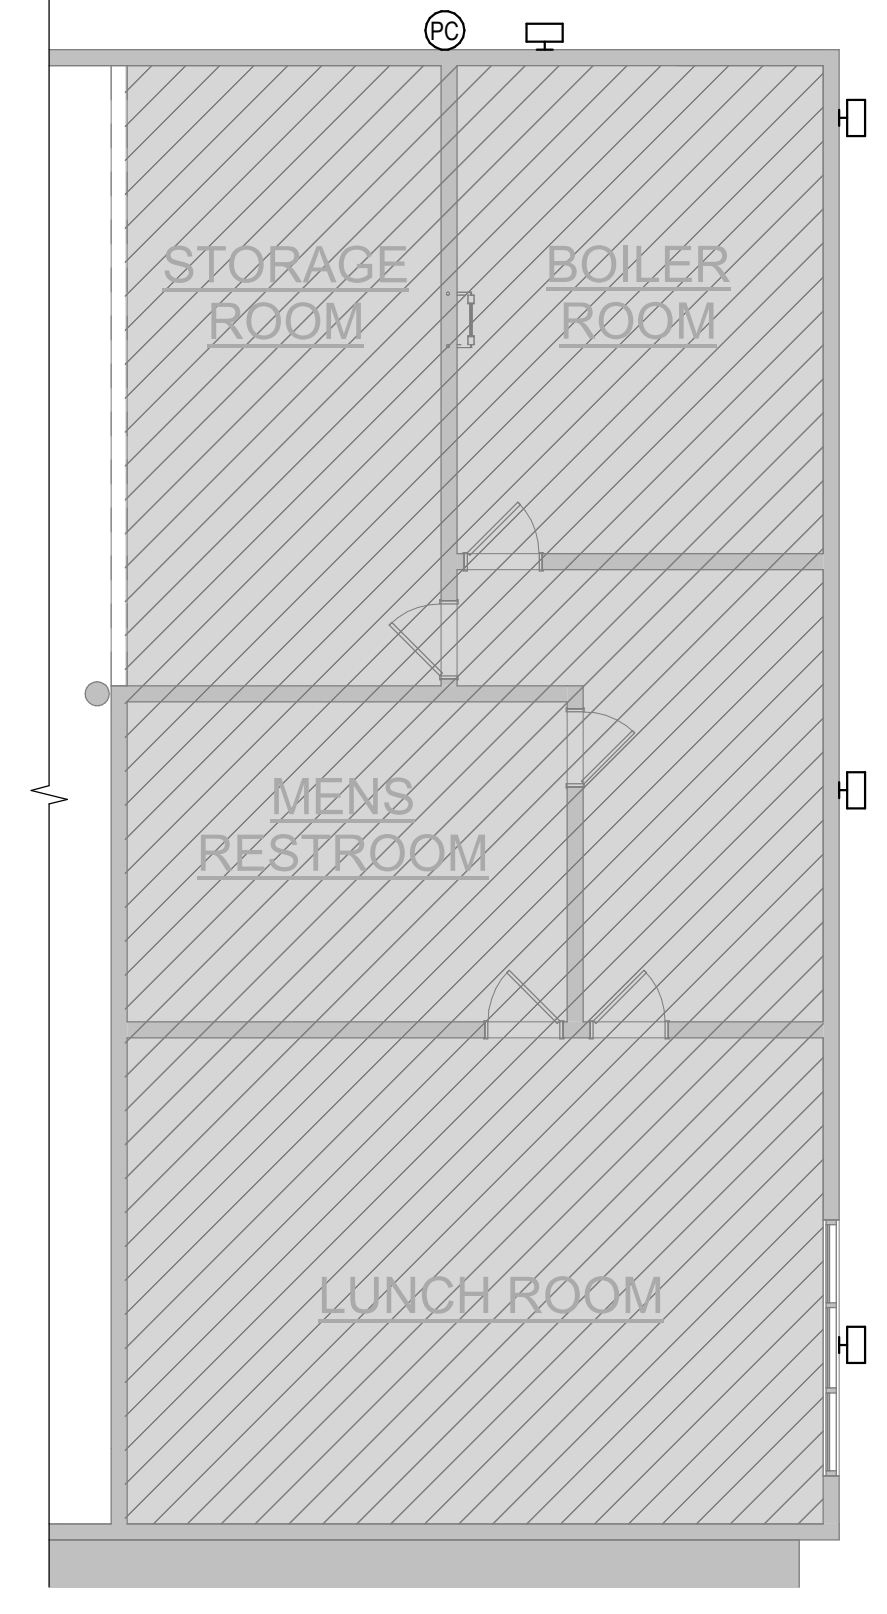


2 OVERALL MEZZANINE DEMOLITION REFLECTED CEILING PLAN
 AD150 SCALE: 1/8" = 1'-0"

DATE & TIME: 7/19/2024 9:26:02 AM

1 OVERALL PROPOSED FIRST FLOOR REFLECTED CEILING PLAN

A150 SCALE: 1/8" = 1'-0"

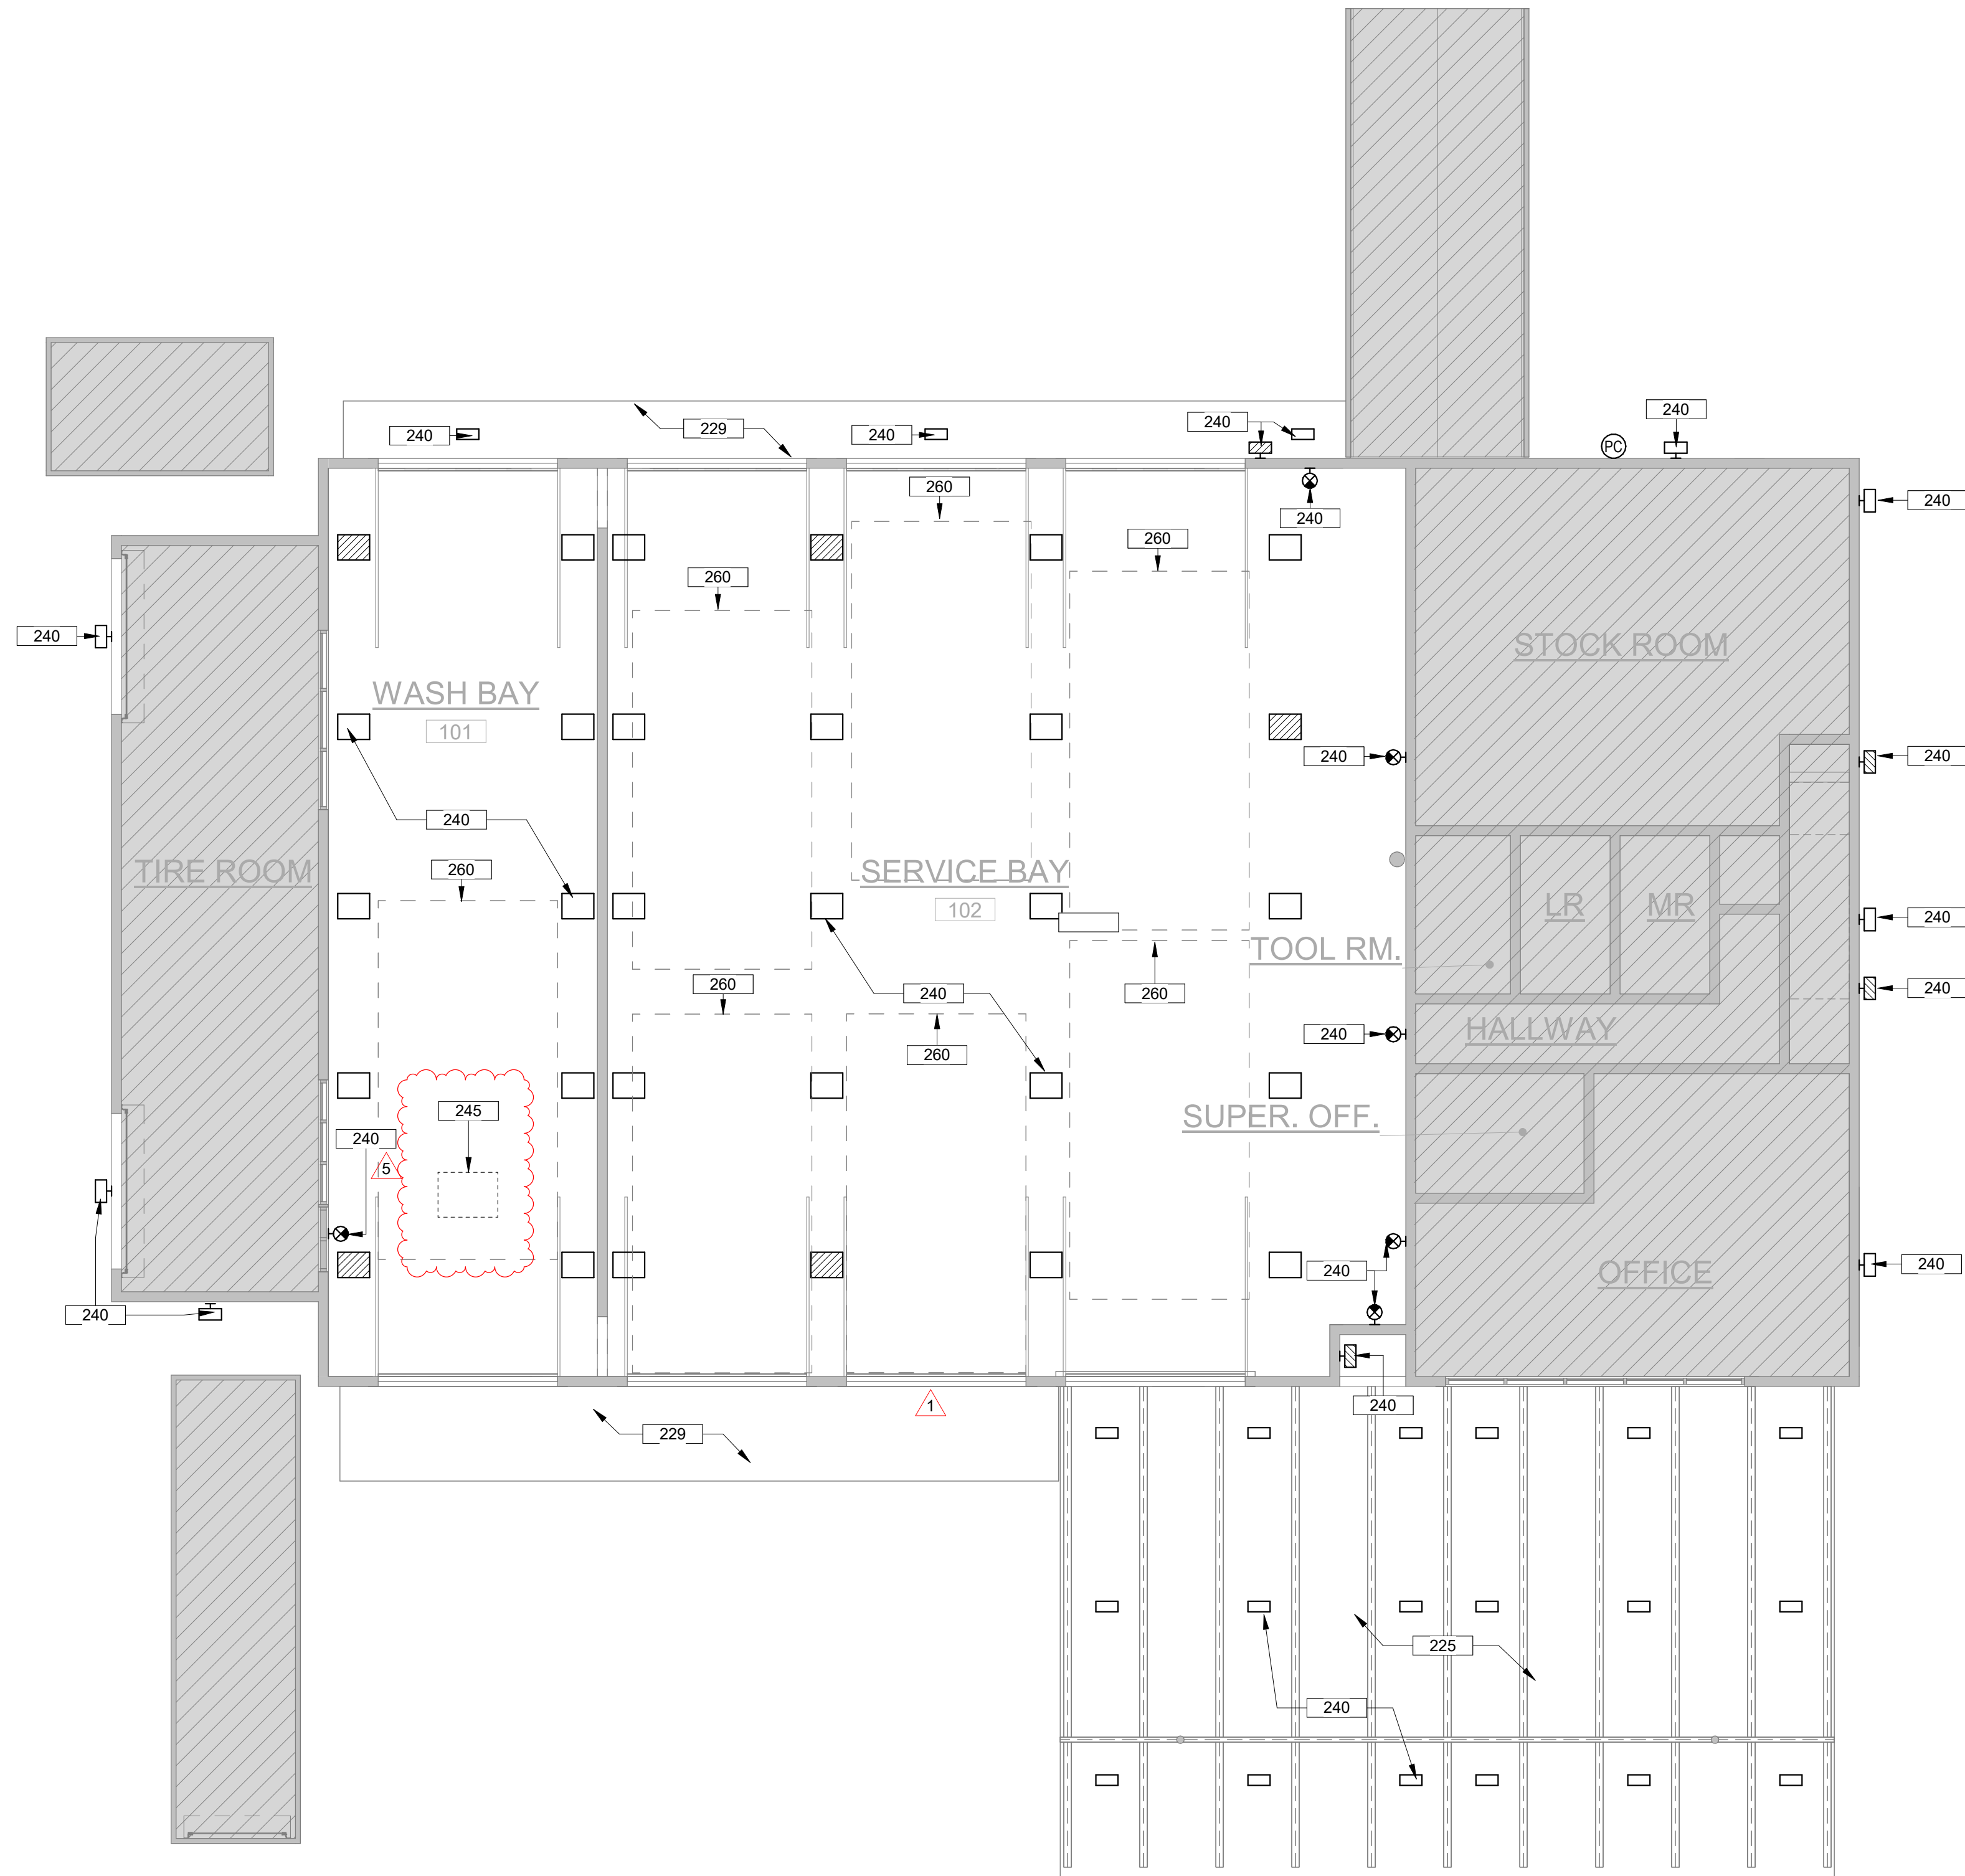

GENERAL NOTES


REFER TO G.002 FOR GENERAL NOTES

KEYNOTES LEGEND

| MARK | DESCRIPTION |
|------|--|
| 225 | PRESSURE WASH/CLEAN EXISTING CANOPY STRUCTURE; PATCH/REPAIR SURFACE AS REQUIRED. |
| 229 | PAINT EXISTING SOFFIT; CLEAN, PREP, AND PRIME SURFACE TO RECEIVE NEW FINISH; COLOR TO MATCH EXISTING. |
| 240 | NEW LIGHT FIXTURE ASSEMBLY/ELECTRICAL EQUIPMENT; TYP. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION. |
| 245 | EXISTING HVAC EQUIPMENT TO BE RELOCATED TO ACCOMMODATE LIFT CLEARANCE @ >16'-3" |
| 260 | ALL UTILITIES, FIXTURES, MECHANICAL SYSTEMS OR ANY OBSTRUCTIONS WITHIN LIFT SERVICE AREAS SHALL BE RELOCATED ABOVE 16'-3" A.F.F. |

LEGEND

NOT IN SCOPE



OVERALL PROPOSED FIRST FLOOR & MEZZ. FLOOR PLAN

A150

Scale: AS NOTED

Date: Jan 12, 2024

Revisions: 5

Revision 5


90% DESIGN SUBMITTAL



UNITED STATES POSTAL SERVICE

LYNNWOOD (NORTH)
6821 208TH ST SW
LYNNWOOD, WA 98036

WSP USA INC.
20 N. BROADWAY
ST. LOUIS, MO 63102



© Copyright 2006-2013, United States Postal Service



5 EXTERIOR OF VMF AT SOUTH FACADE



4 EXTERIOR OF VMF AT SOUTH FACADE




3 EXTERIOR OF VMF AT NORTH FACADE




2 EXTERIOR OF VMF AT NORTH FACADE




1 EXTERIOR OF VMF AT NORTH FACADE

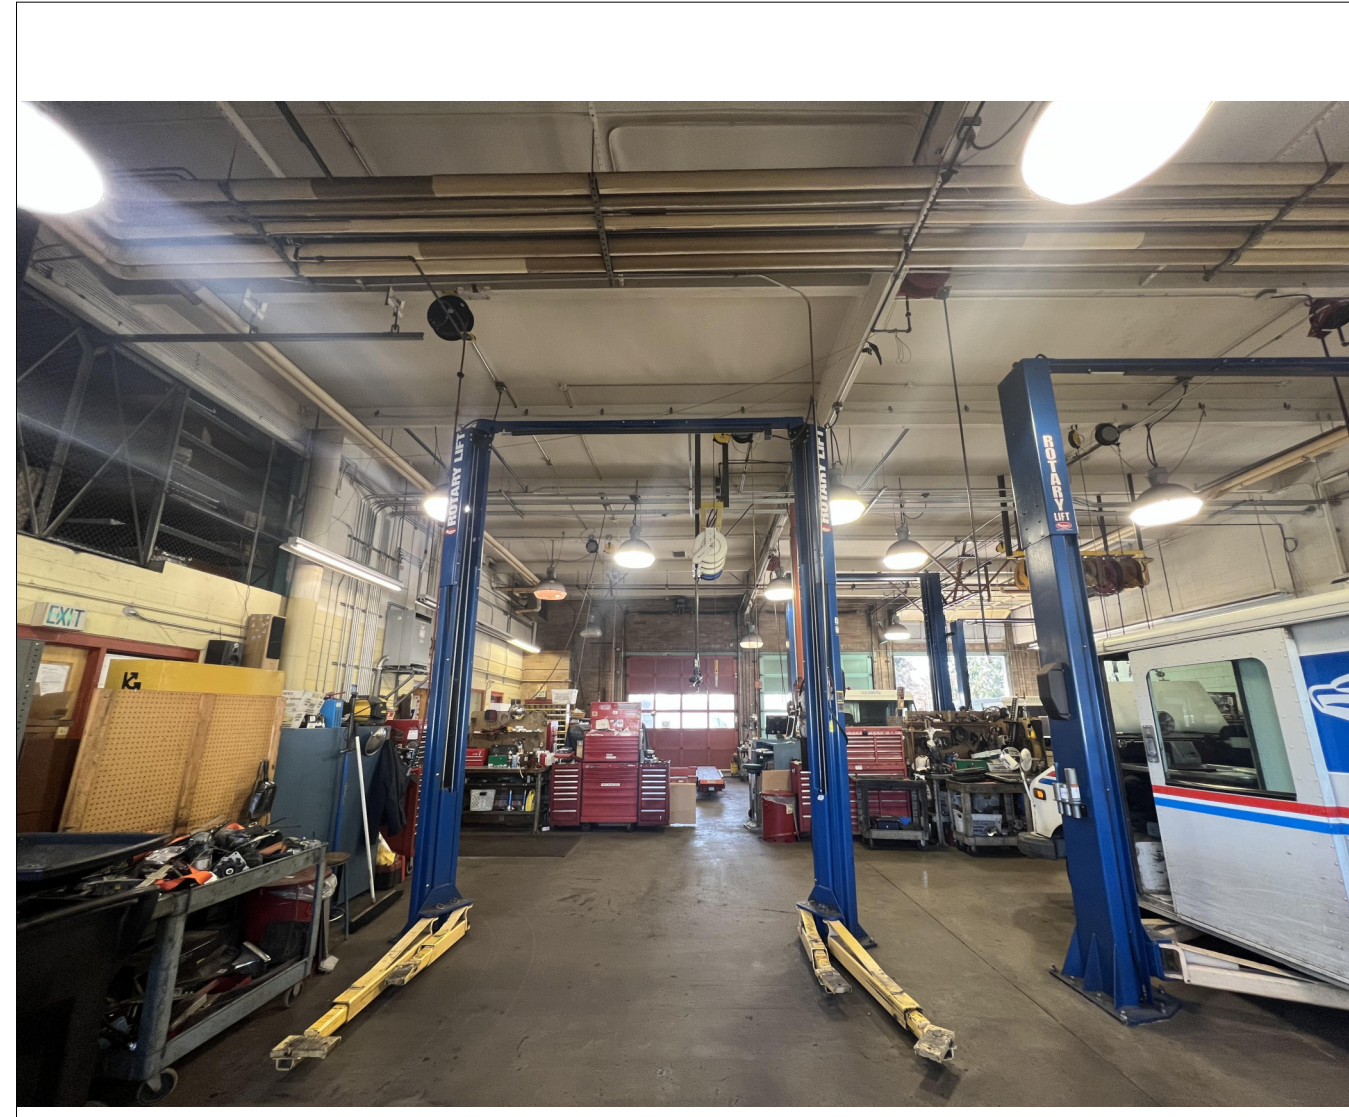

10 INTERIOR OF VMF SERVICE BAY

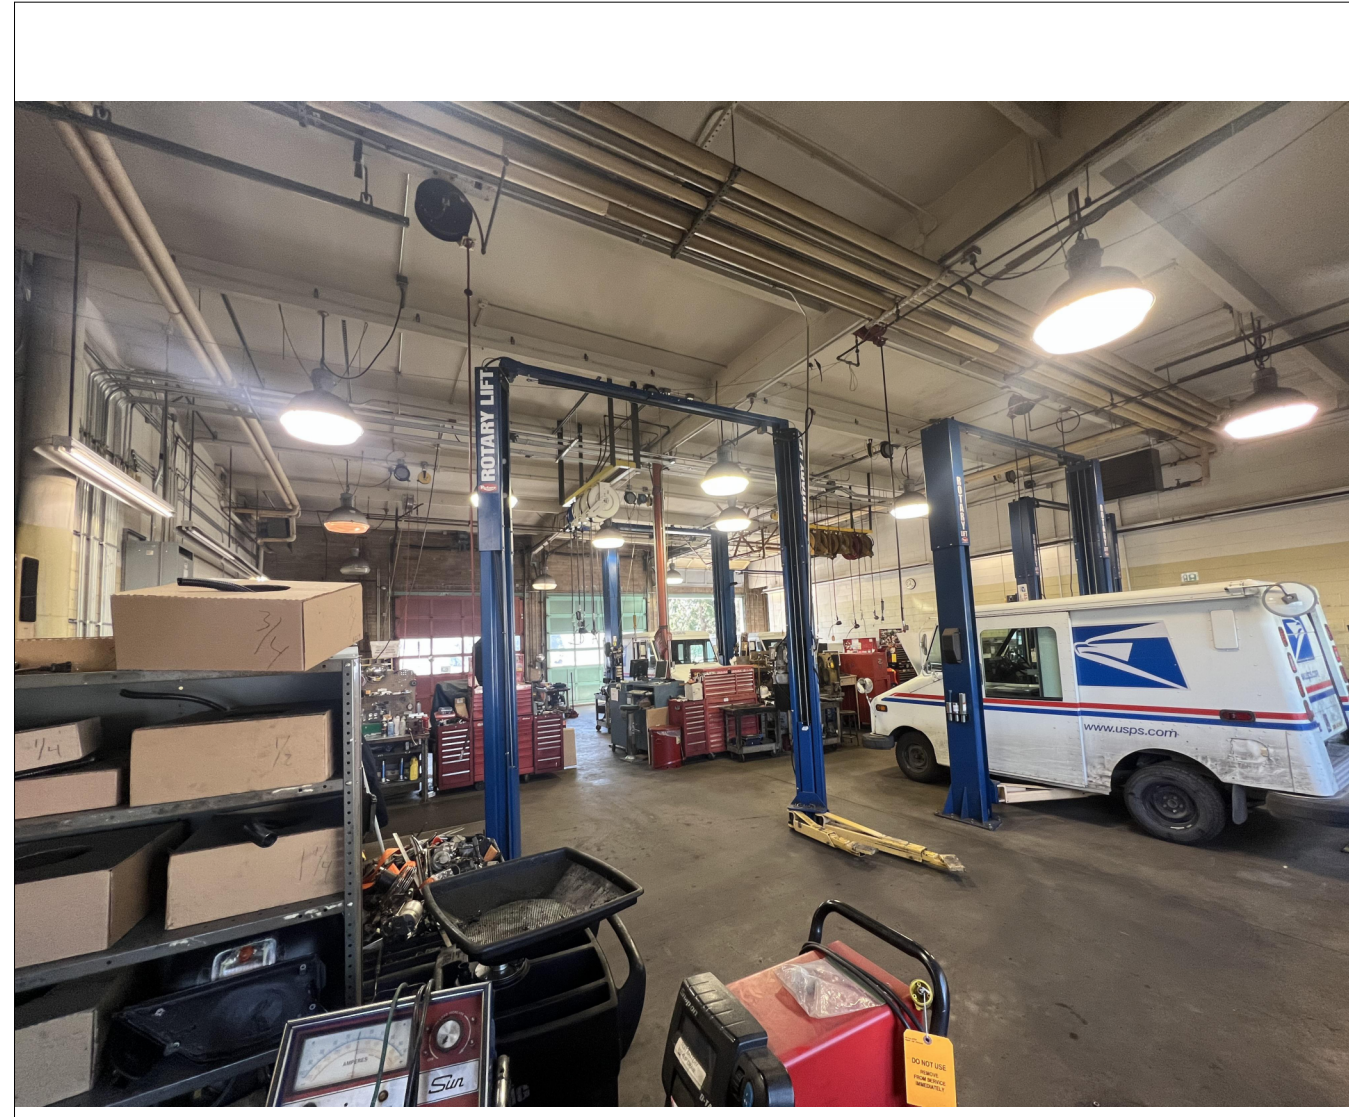

9 INTERIOR OF VMF SERVICE BAY

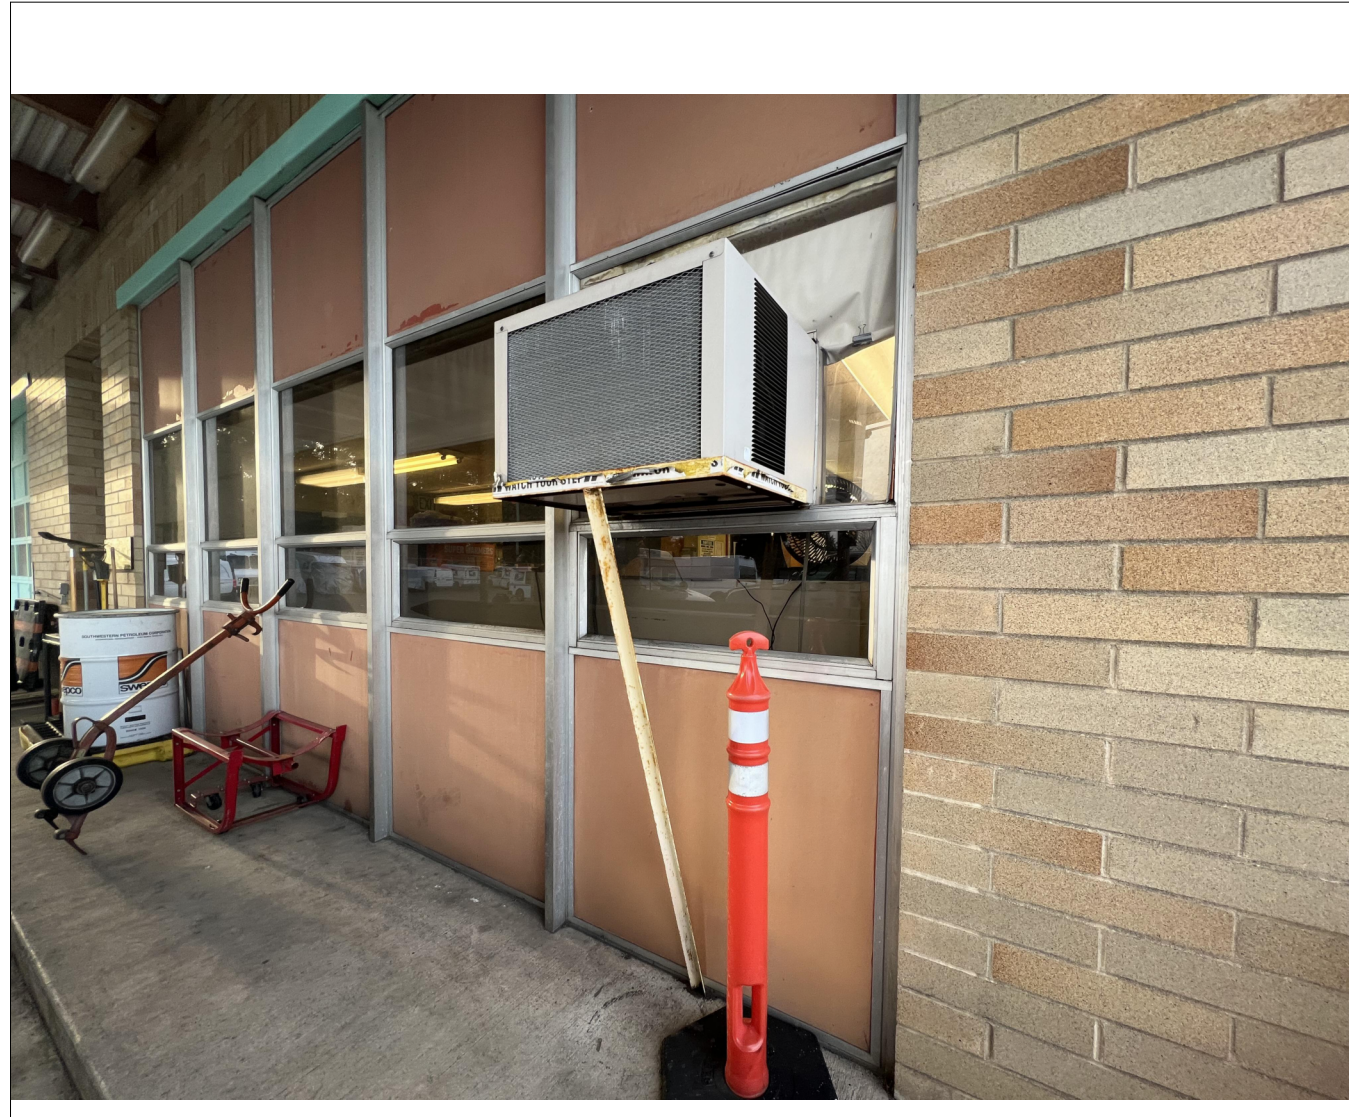


8 EXTERIOR OF VMF AT SOUTH FACADE




7 EXTERIOR OF VMF AT NORTH FACADE




6 EXTERIOR OF VMF AT SOUTH FACADE

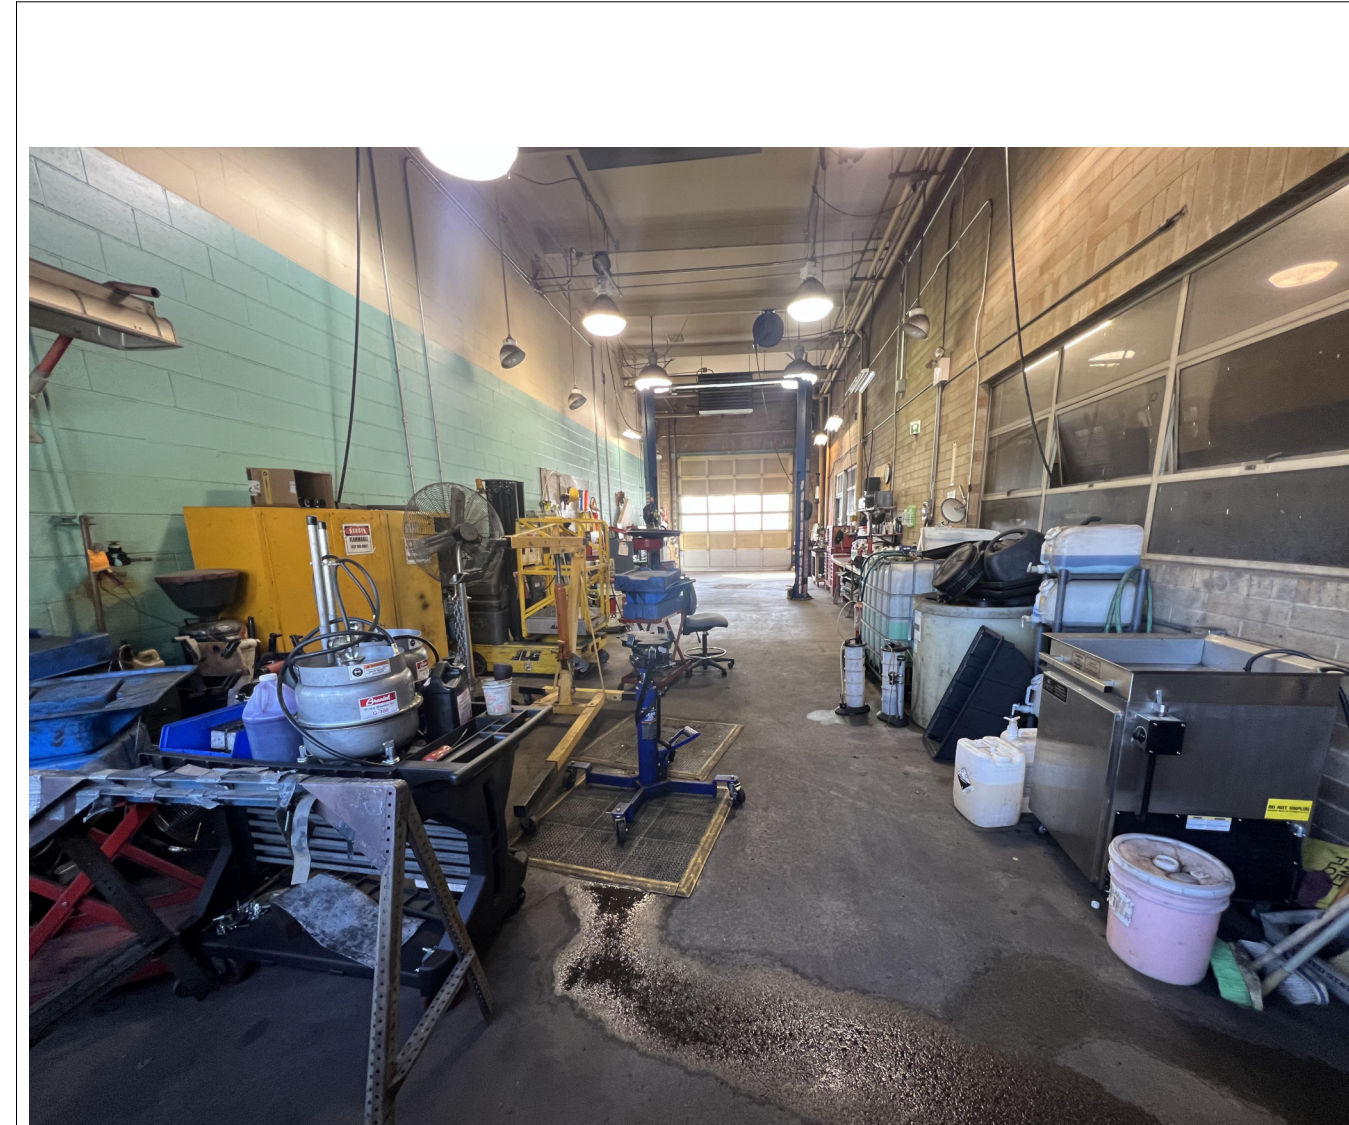


15 INTERIOR OF VMF WASH BAY

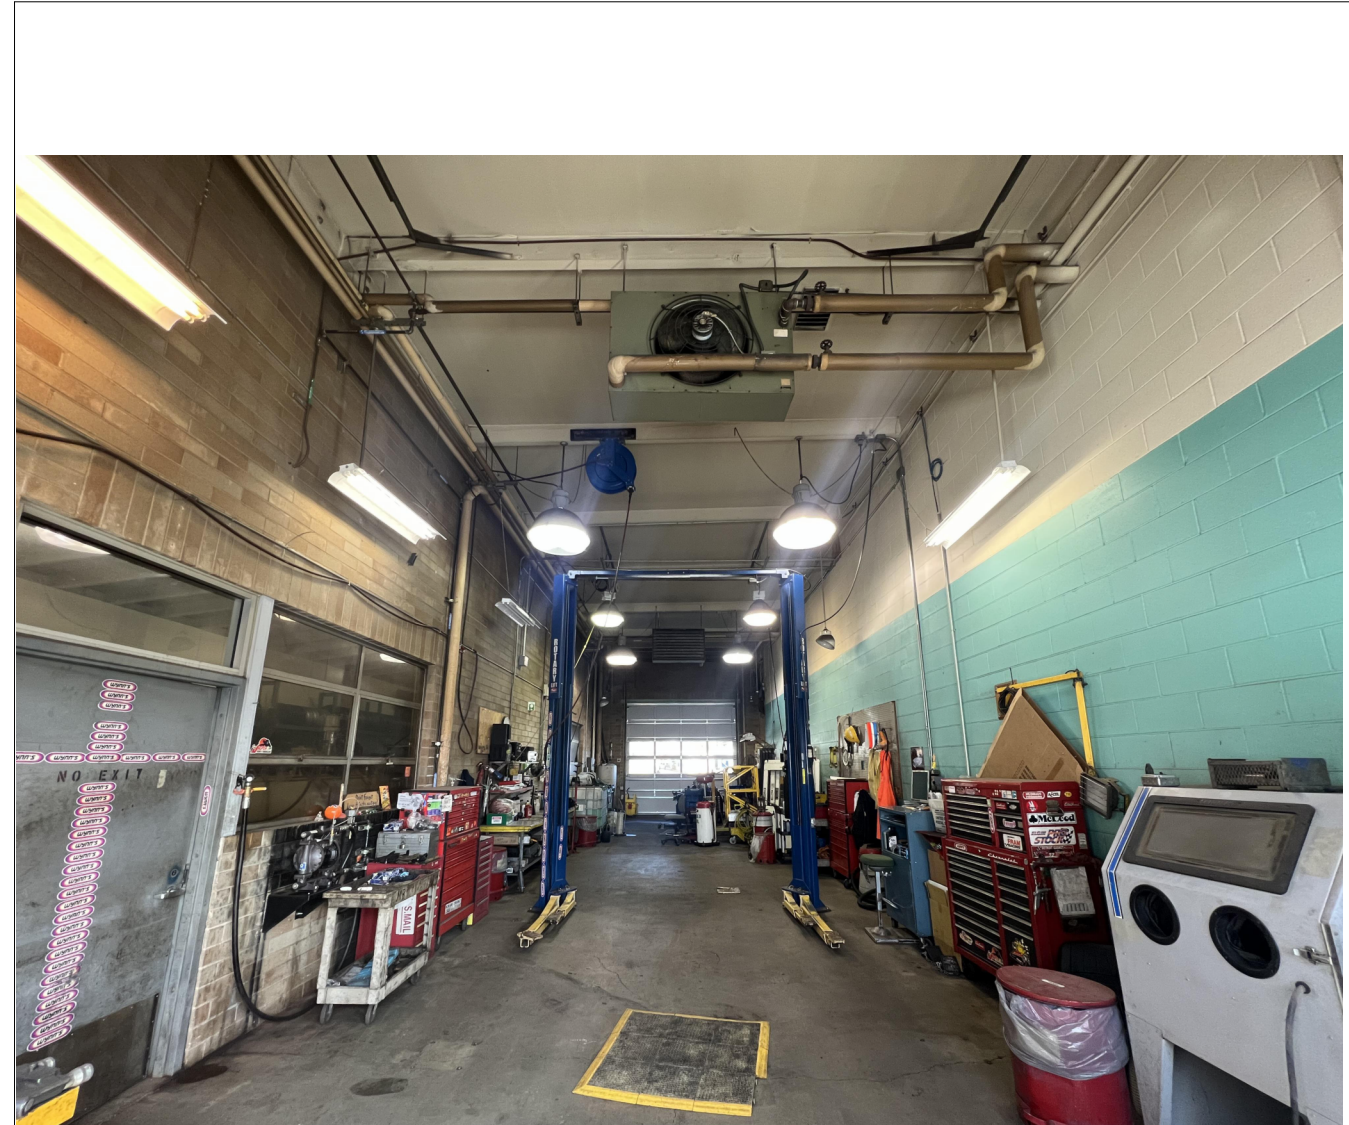


14 INTERIOR OF VMF WASH BAY

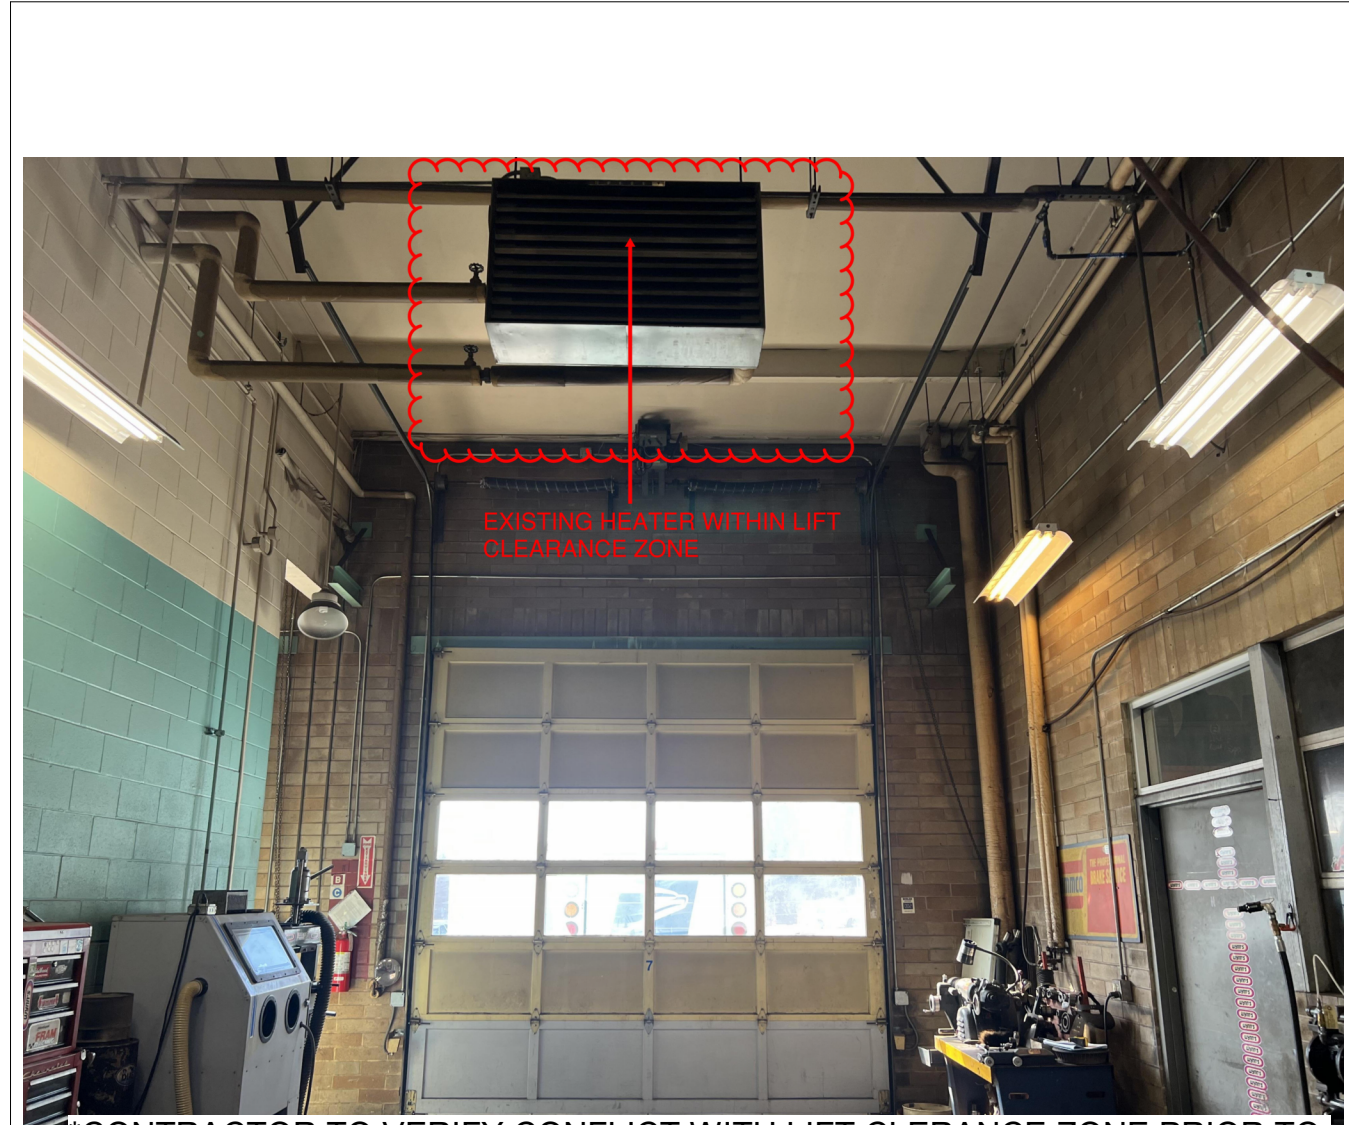

13 POTENTIAL OBSTRUCTION AT WASH BAY
CONTRACTOR TO VERIFY CONFLICT WITH LIFT CLEARANCE ZONE PRIOR TO COMMENCING WORK

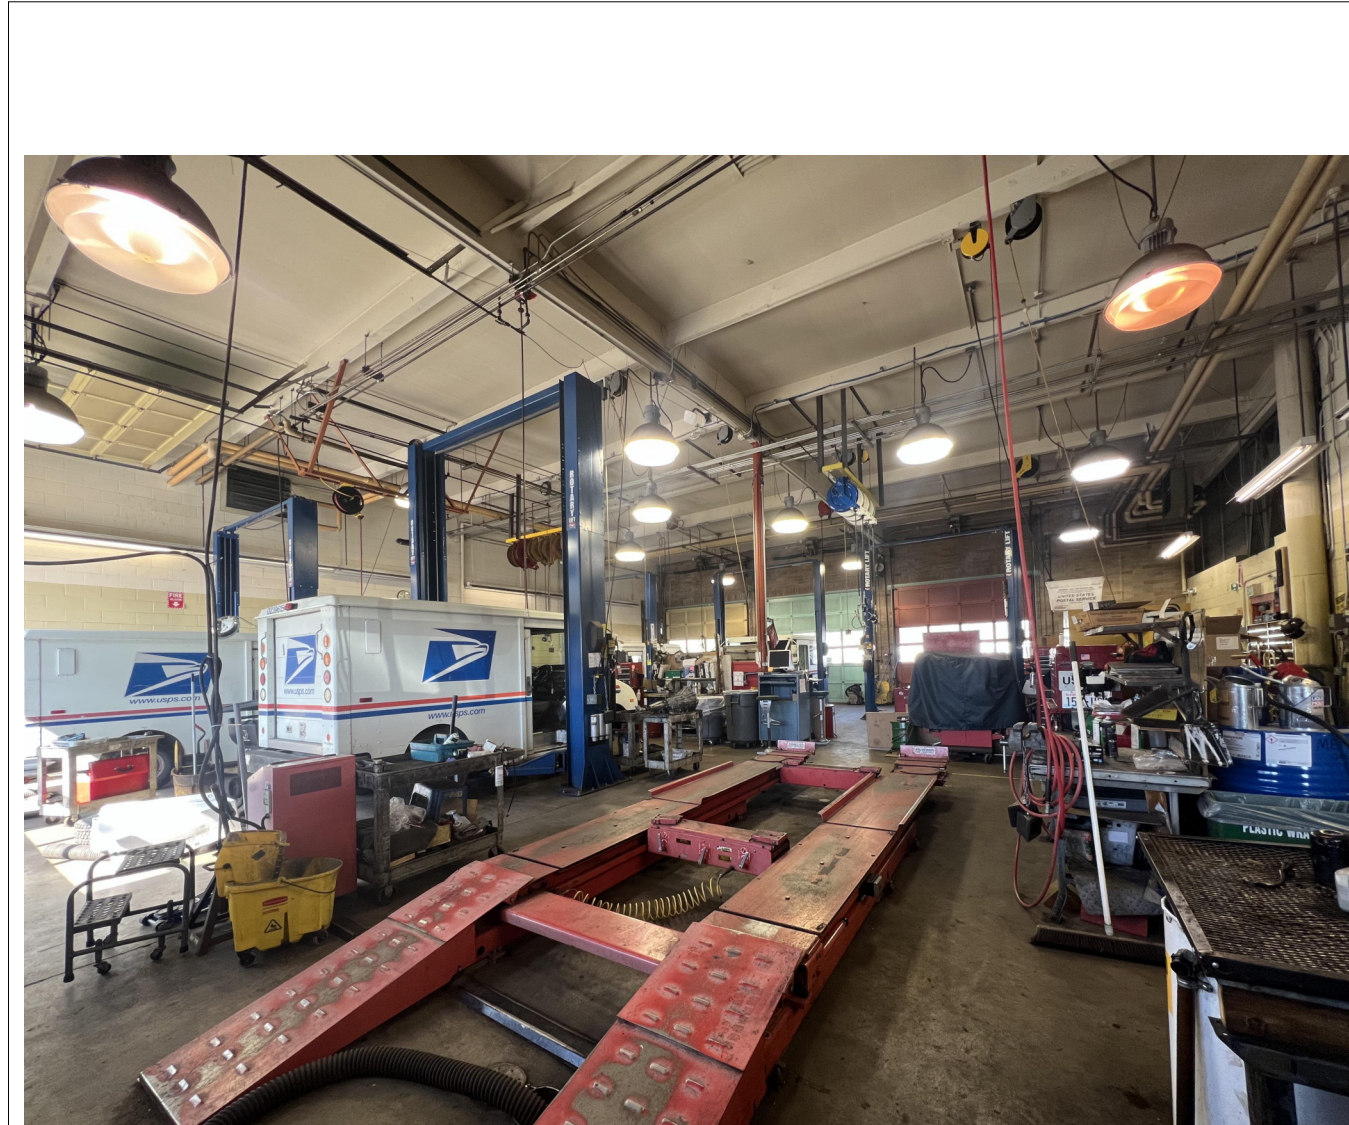

12 INTERIOR OF VMF SERVICE BAY

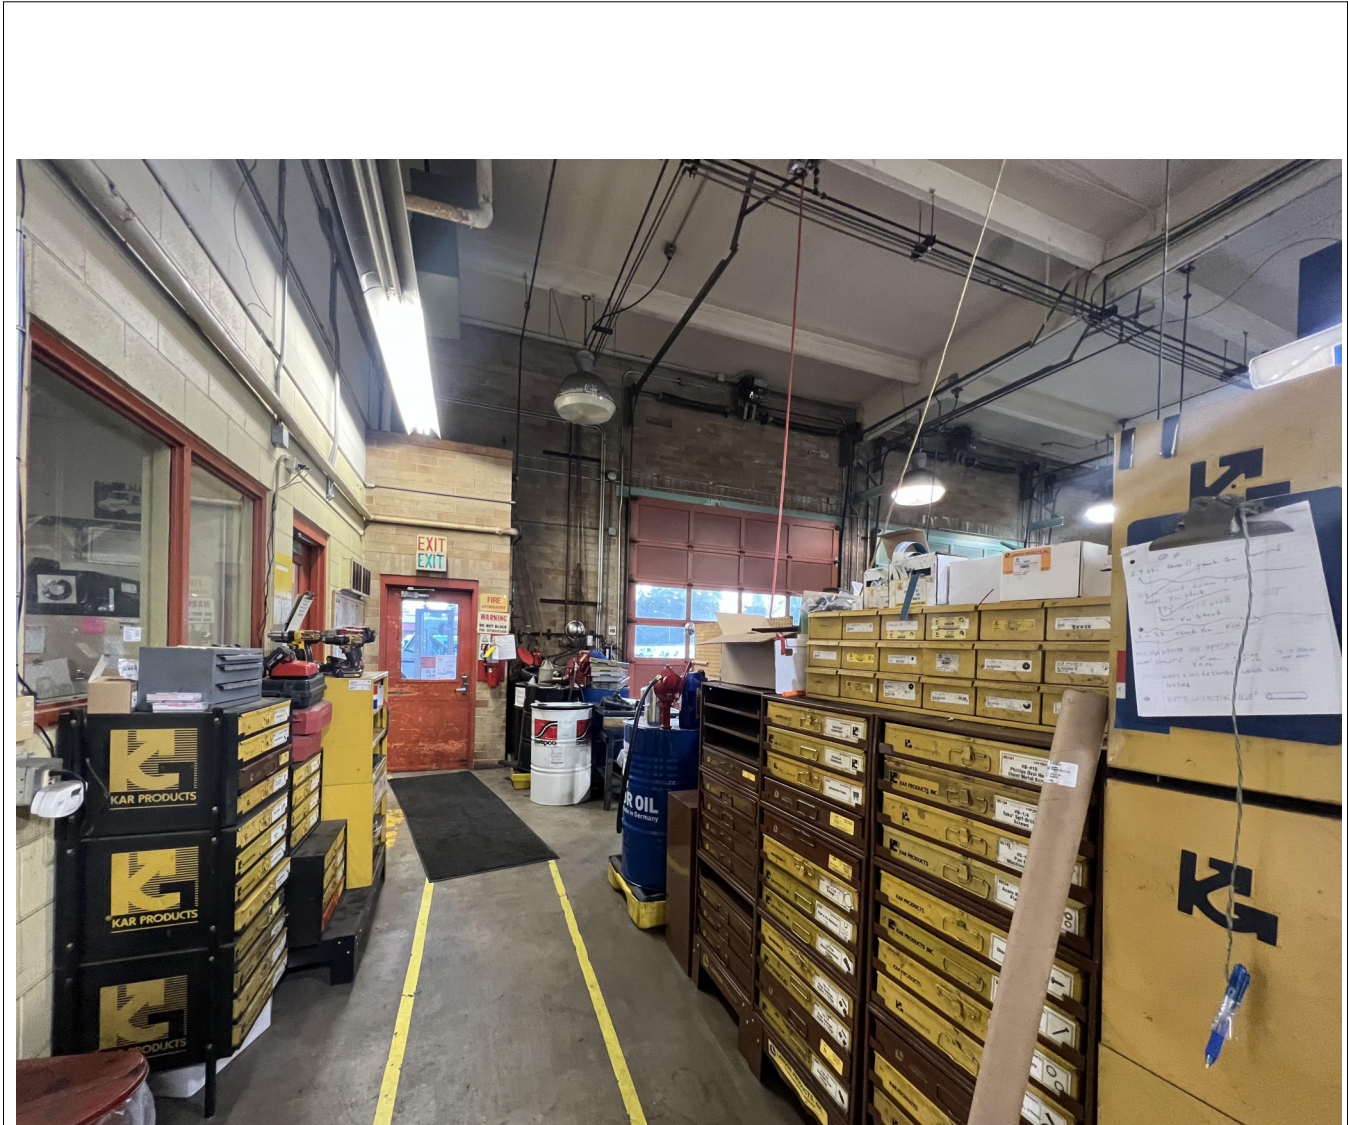


11 INTERIOR OF VMF SERVICE BAY



18 INTERIOR OF VMF OFFICE



17 INTERIOR OF VMF TIRE ROOM

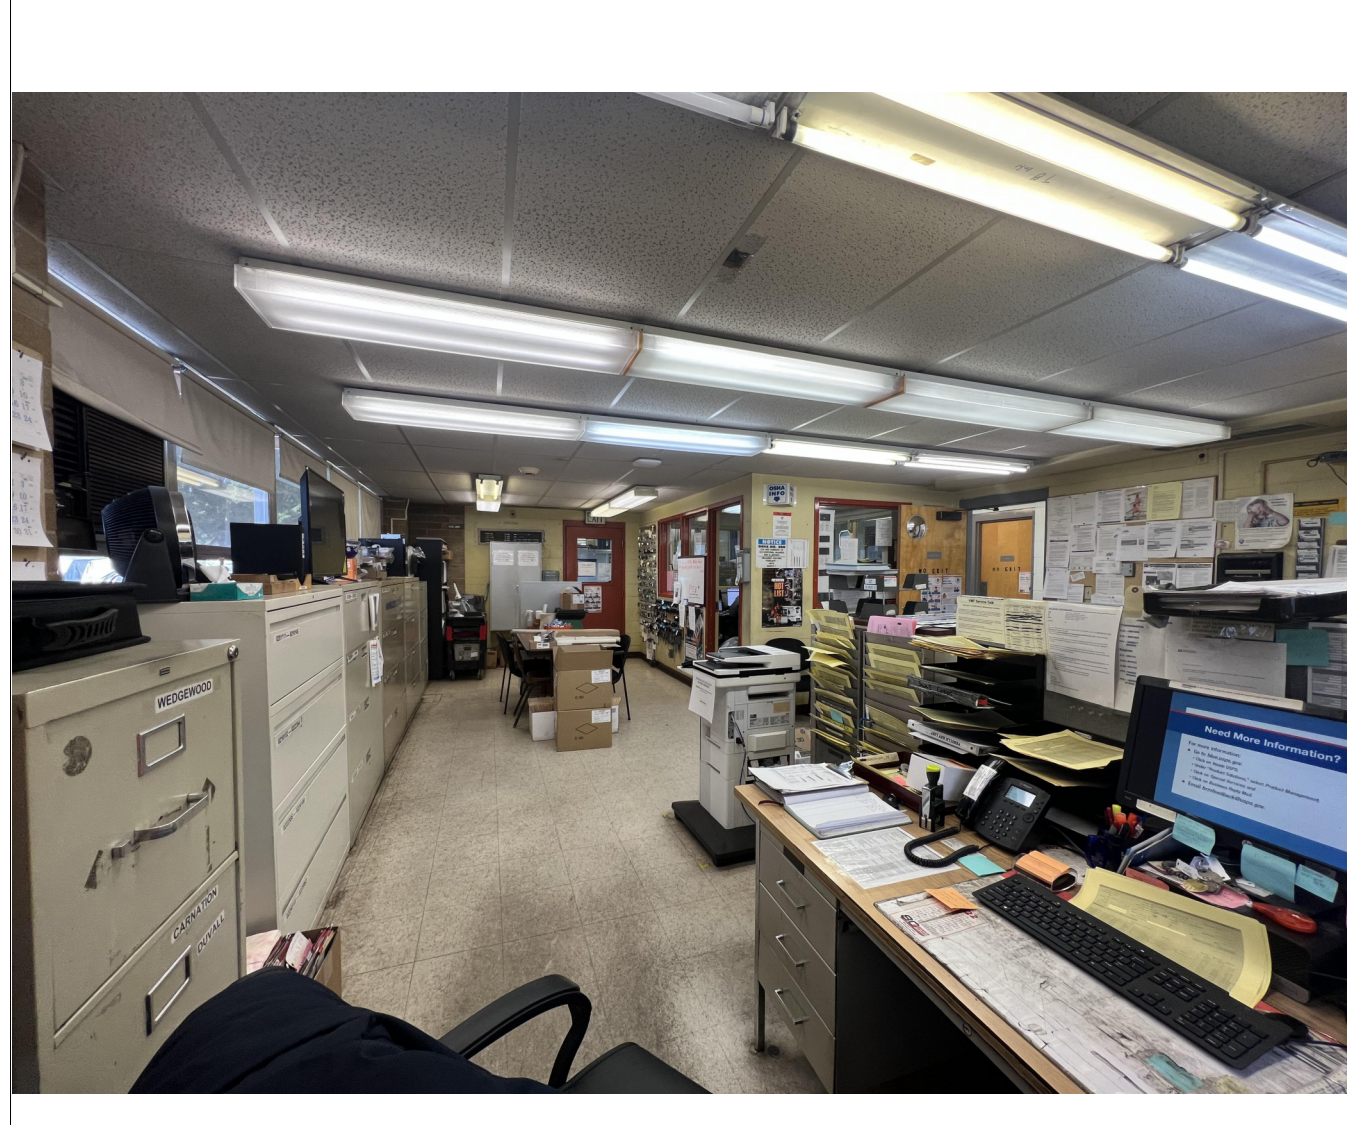

16 INTERIOR OF VMF TIRE ROOM



16 INTERIOR OF VMF TIRE ROOM



16 INTERIOR OF VMF TIRE ROOM